



US012404683B2

(12) **United States Patent**
Gomo et al.

(10) **Patent No.:** **US 12,404,683 B2**

(45) **Date of Patent:** ***Sep. 2, 2025**

(54) **ELEVATOR TRENCH DRAIN**

(71) Applicant: **ZURN WATER, LLC**, Milwaukee, WI (US)

(72) Inventors: **David M. Gomo**, Lake City, PA (US); **Robert A. DiPlacido**, Erie, PA (US); **Jaroslav J. Plachotnik**, Jamestown, NY (US); **Jason E. Morris**, Erie, PA (US)

(73) Assignee: **ZURN WATER, LLC**, Milwaukee, WI (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

This patent is subject to a terminal disclaimer.

(21) Appl. No.: **18/309,656**

(22) Filed: **Apr. 28, 2023**

(65) **Prior Publication Data**

US 2023/0265664 A1 Aug. 24, 2023

Related U.S. Application Data

(63) Continuation of application No. 17/228,448, filed on Apr. 12, 2021, now Pat. No. 11,674,320, which is a (Continued)

(51) **Int. Cl.**
E04F 17/00 (2006.01)
B66B 13/30 (2006.01)

(Continued)

(52) **U.S. Cl.**
CPC **E04F 17/00** (2013.01); **B66B 13/301** (2013.01); **E03F 5/0407** (2013.01); **E03F 5/06** (2013.01);

(Continued)

(58) **Field of Classification Search**

CPC E04C 3/02; E04C 2003/026; E04H 9/02; F16B 2/065; F16B 7/0413; E04B 2001/5868

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

2,182,795 A 12/1939 Day
2,363,567 A 11/1944 Blakeman
(Continued)

FOREIGN PATENT DOCUMENTS

DE 19622021 A1 12/1997
EP 1630309 A1 3/2006
(Continued)

OTHER PUBLICATIONS

Exam report issued from the Canadian Patent Office for related Application No. 2925260 dated Apr. 27, 2022 (5 Pages).


Primary Examiner — Brent W Herring

(74) *Attorney, Agent, or Firm* — Husch Blackwell LLP

(57) **ABSTRACT**

A trench drain includes a trench, a grating seat and a grating hingedly connected to the trench. The trench has a base wall with peripheral side walls extending upwardly therefrom and an outwardly-extending peripheral flange. The grating seat is configured to receive the grating. The peripheral side walls of the trench have a pair of opposing elongated slots formed therein and the grating has a pair of posts on opposing ends thereof. Each of the pair of posts on the grating are received in a respective one of the pair of opposing elongated slots of the trench to establish an axis of rotation.

20 Claims, 3 Drawing Sheets

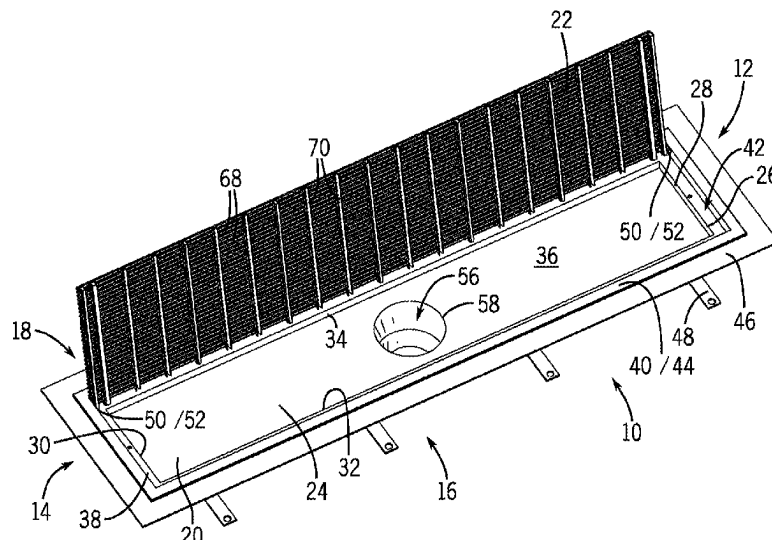

Related U.S. Application Data

continuation of application No. 16/780,623, filed on Feb. 3, 2020, now Pat. No. 10,975,583, which is a continuation of application No. 16/271,324, filed on Feb. 8, 2019, now Pat. No. 10,570,628, which is a continuation of application No. 15/689,896, filed on Aug. 29, 2017, now Pat. No. 10,240,351, which is a continuation of application No. 15/262,179, filed on Sep. 12, 2016, now Pat. No. 9,777,489.

- (60) Provisional application No. 62/298,159, filed on Feb. 22, 2016.
- (51) **Int. Cl.**
E03F 5/04 (2006.01)
E03F 5/06 (2006.01)
- (52) **U.S. Cl.**
 CPC *E03F 2005/061* (2013.01); *E04F 17/005* (2013.01)

- (56) **References Cited**

U.S. PATENT DOCUMENTS

2,779,430 A 1/1957 Sisk
 2,889,928 A 6/1959 Sisk
 3,040,895 A 6/1962 Sisk
 3,246,582 A 4/1966 Clare et al.
 3,455,059 A 7/1969 Evans, III
 3,990,469 A 11/1976 Ralston
 4,067,072 A 1/1978 Izzi
 D259,950 S 7/1981 Henry
 4,321,713 A 3/1982 Thompson
 RE31,561 E 4/1984 Thompson
 4,541,132 A 9/1985 Long
 4,912,349 A 3/1990 Chang
 4,964,180 A 10/1990 Harbeke
 5,017,039 A 5/1991 Spiess et al.
 5,032,264 A * 7/1991 Geiger E03F 5/041
 210/163

5,213,438 A 5/1993 Barenwald
 5,230,188 A * 7/1993 Nurse E03F 5/0407
 52/177

5,319,812 A 6/1994 Harrahan et al.
 5,324,135 A 6/1994 Smith
 D355,707 S 2/1995 Emanuele et al.
 5,466,091 A 11/1995 Sauerwin et al.
 5,864,990 A 2/1999 Tu
 5,954,952 A 9/1999 Strawse, Sr.
 5,979,607 A 11/1999 Allen
 6,003,169 A 12/1999 Davis, Jr.
 6,272,804 B1 8/2001 Leis
 6,290,143 B1 9/2001 Vincent et al.
 6,558,769 B1 5/2003 Chwala
 6,810,537 B1 11/2004 Barnes et al.
 6,941,703 B2 9/2005 MacLean et al.
 7,033,489 B2 4/2006 Thompson et al.
 D523,537 S 6/2006 Howard
 7,114,872 B2 10/2006 Alba
 7,293,937 B2 11/2007 Fuchs
 7,303,669 B2 12/2007 Monneret
 7,316,834 B2 1/2008 Hernandez
 D582,527 S 12/2008 Wang
 7,588,392 B2 9/2009 Wroblewski et al.
 7,631,471 B2 12/2009 Grunewald et al.
 7,744,304 B2 6/2010 Akkala et al.
 8,181,288 B1 5/2012 Davis, Jr.
 8,226,824 B2 7/2012 Mondschein et al.
 D672,015 S 12/2012 Luke
 8,474,068 B2 7/2013 Kik, Sr. et al.
 8,505,125 B1 8/2013 Chia et al.
 8,549,678 B2 10/2013 Neidich et al.
 8,658,033 B2 2/2014 Farkas
 8,677,521 B2 3/2014 Stimpson
 8,800,226 B2 8/2014 Bloch

9,010,363 B2 4/2015 Huber
 9,027,715 B2 5/2015 Bloch et al.
 9,206,593 B2 12/2015 Tripodi et al.
 9,382,701 B2 7/2016 Meyers
 9,617,723 B2 4/2017 Stonecipher et al.
 9,777,489 B2 10/2017 Gomo et al.
 9,822,539 B1 11/2017 Krombein
 10,047,512 B2 8/2018 Chromey
 10,167,621 B2 * 1/2019 Priester E06B 1/70
 10,240,351 B2 3/2019 Gomo et al.
 10,501,926 B2 12/2019 Priester
 10,570,628 B2 2/2020 Gomo et al.
 10,975,583 B2 4/2021 Gomo et al.

2002/0078498 A1 6/2002 Cheng
 2004/0238424 A1 12/2004 Thompson et al.
 2004/0256298 A1 12/2004 Curlol
 2005/0230295 A1 10/2005 Monneret
 2005/0284704 A1 12/2005 Hernandez, Jr.
 2006/0048469 A1 * 3/2006 MacLean E03F 5/0402
 52/220.3

2006/0171778 A1 8/2006 Fuchs
 2007/0034577 A1 2/2007 Bayard et al.
 2007/0177942 A1 * 8/2007 Meyers E03F 3/046
 405/40

2007/0204399 A1 * 9/2007 DeGooyer E03F 5/0408
 4/679

2008/0014022 A1 1/2008 Wroblewski et al.
 2008/0019776 A1 * 1/2008 Fithian E03F 3/046
 405/118

2008/0276368 A1 11/2008 Neidich et al.
 2009/0097921 A1 4/2009 Hetzler et al.
 2009/0113621 A1 5/2009 DeGooyer et al.
 2009/0236293 A1 9/2009 Alvarado
 2009/0241442 A1 * 10/2009 MacLean A01K 1/0151
 52/302.1

2010/0162481 A1 7/2010 Erlebach
 2011/0023978 A1 2/2011 Keizers
 2011/0061161 A1 * 3/2011 Erlebach E03F 5/0408
 4/679

2011/0067175 A1 3/2011 Sleylaerts et al.
 2011/0088161 A1 4/2011 Stimpson
 2011/0139694 A1 6/2011 Mondschein et al.
 2011/0162137 A1 7/2011 Kik, Sr. et al.
 2011/0185657 A1 8/2011 Delaquis
 2012/0031712 A1 2/2012 Bloch et al.
 2012/0110827 A1 5/2012 Doolittle et al.
 2012/0266968 A1 10/2012 Bloch et al.
 2012/0273050 A1 11/2012 Metzger et al.
 2012/0324644 A2 12/2012 Neidich et al.
 2013/0098472 A1 4/2013 Farkas
 2013/0276226 A1 10/2013 Cook et al.
 2013/0326806 A1 12/2013 Stonecipher et al.
 2014/0230140 A1 8/2014 Davis, Jr.
 2014/0262996 A1 9/2014 Alvarado
 2014/0352815 A1 12/2014 Brodey et al.
 2014/0373943 A1 12/2014 Huber
 2015/0240464 A1 8/2015 Meyers
 2015/0275498 A1 10/2015 Belanger
 2015/0306092 A1 10/2015 Chromey et al.
 2015/0308092 A1 * 10/2015 Chromey E03F 3/046
 137/363

2016/0194861 A1 7/2016 Nivelles
 2016/0305109 A1 10/2016 Meyers
 2016/0309965 A1 10/2016 Berkey
 2017/0089331 A1 3/2017 Bialick et al.
 2017/0211267 A1 7/2017 Stonecipher et al.
 2018/0030713 A1 2/2018 Howson
 2018/0087260 A1 3/2018 Priester
 2018/0320357 A1 11/2018 Chromey et al.
 2018/0320358 A1 11/2018 Chromey et al.
 2019/0032323 A1 1/2019 Priester
 2021/0102348 A1 4/2021 Priester

FOREIGN PATENT DOCUMENTS

EP 2902556 A1 8/2015
 GB 2468838 A 9/2010
 JP S52115038 A 9/1977


(56)

References Cited

FOREIGN PATENT DOCUMENTS

JP	H05105350	A	4/1993
JP	H06227773	A	8/1994
JP	H0761743	A	3/1995
JP	H1059661	A	3/1998
JP	H10324485	A	12/1998
JP	2000219453	A	8/2000
JP	2005082363	A	3/2005
JP	2009196729	A	9/2009
JP	2011195249	A	10/2011
JP	2016156245	A	9/2016
WO	9822381	A1	5/1998
WO	2014012526	A1	1/2014

* cited by examiner

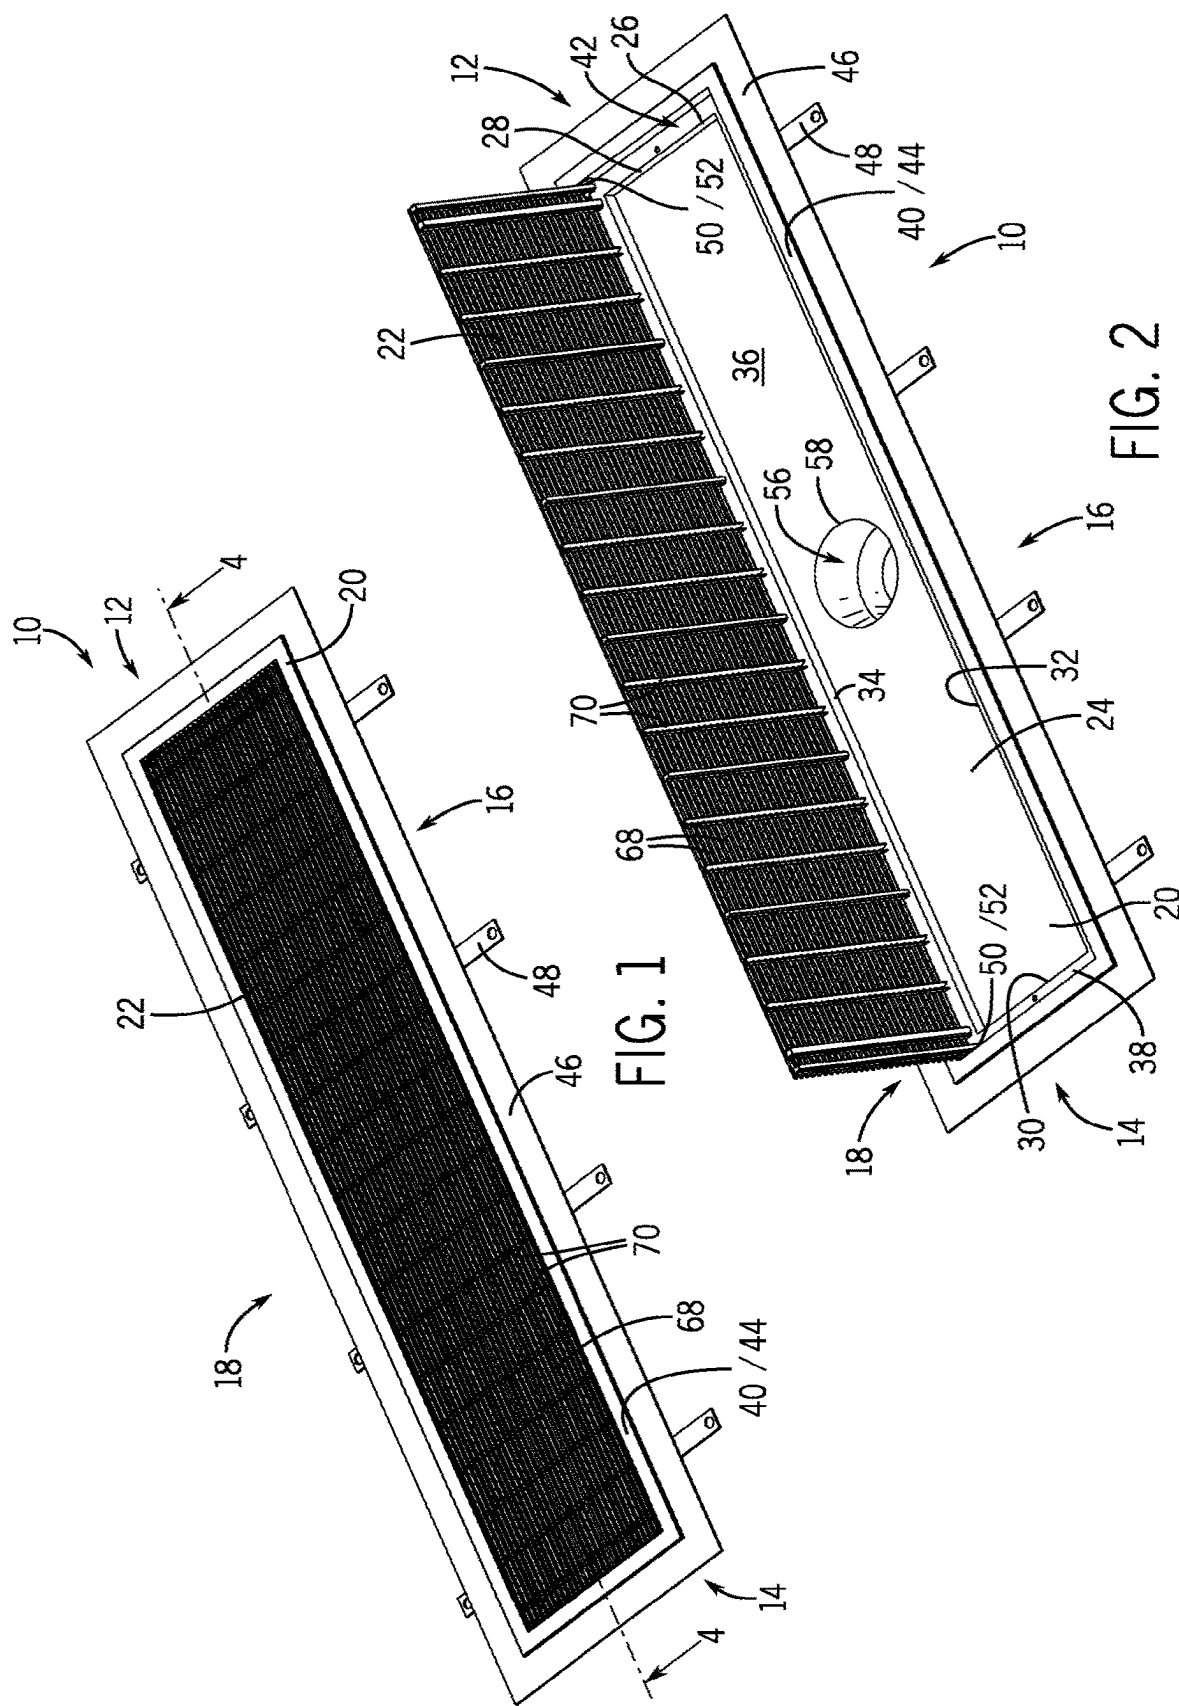

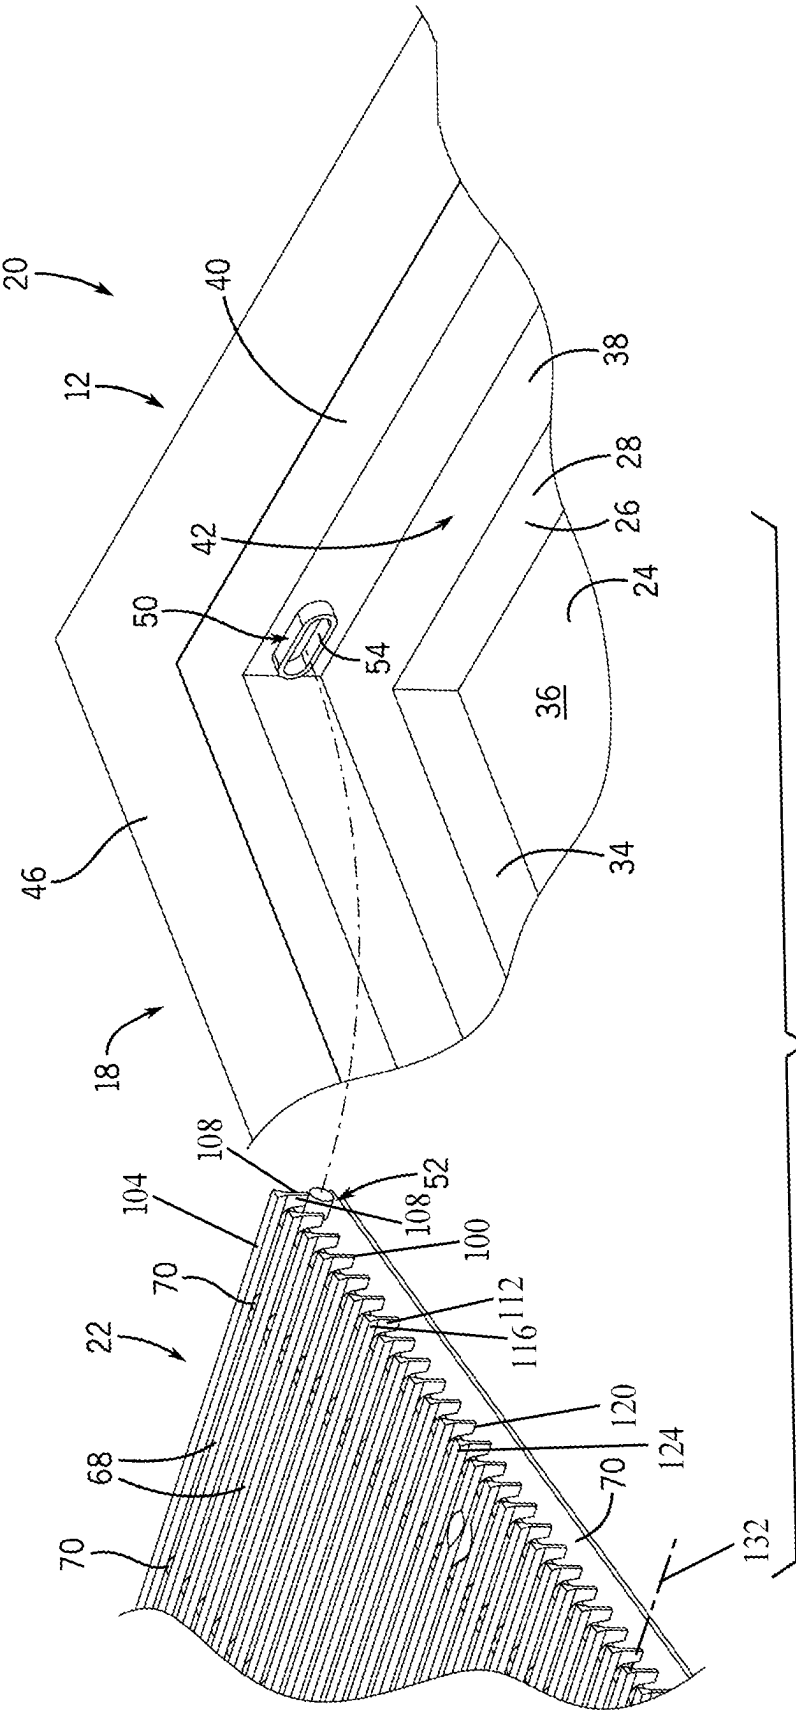
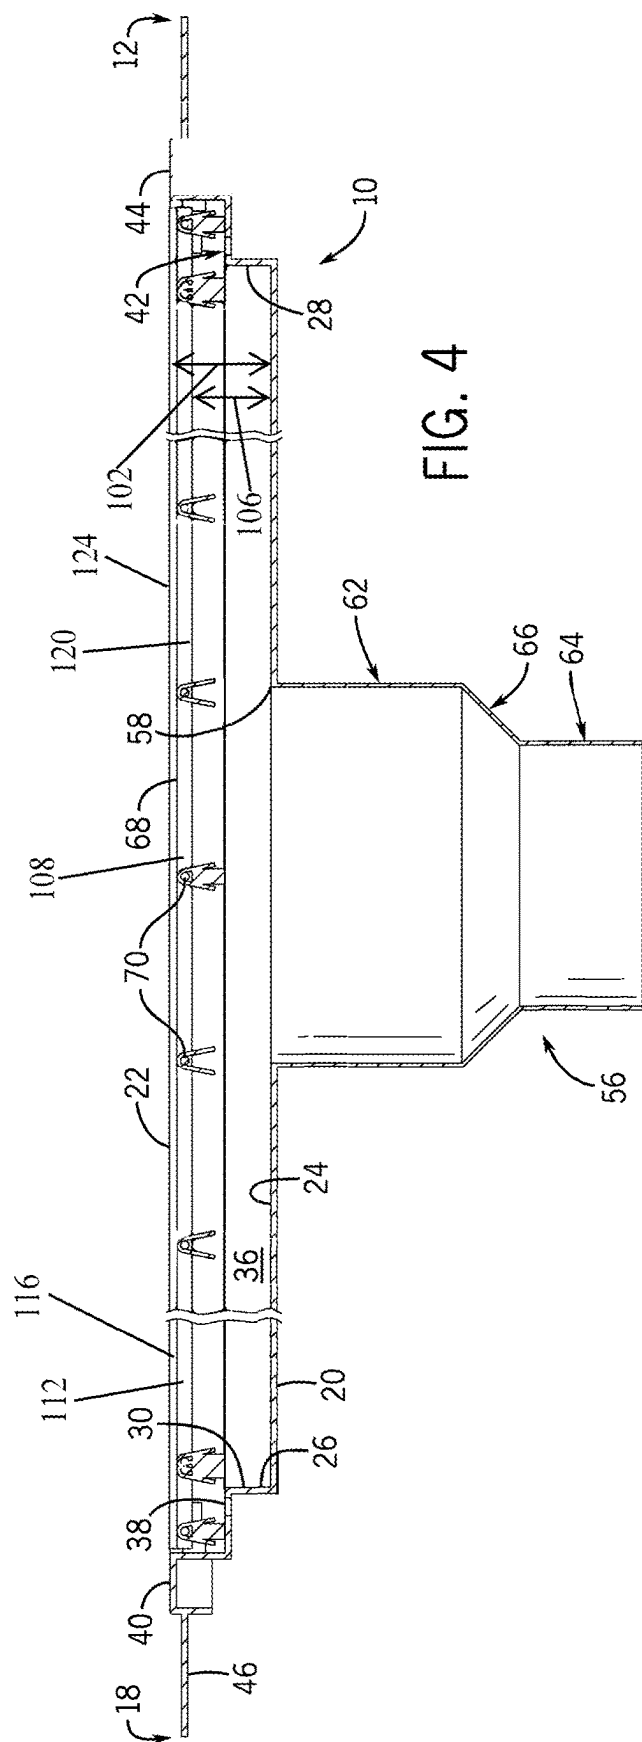
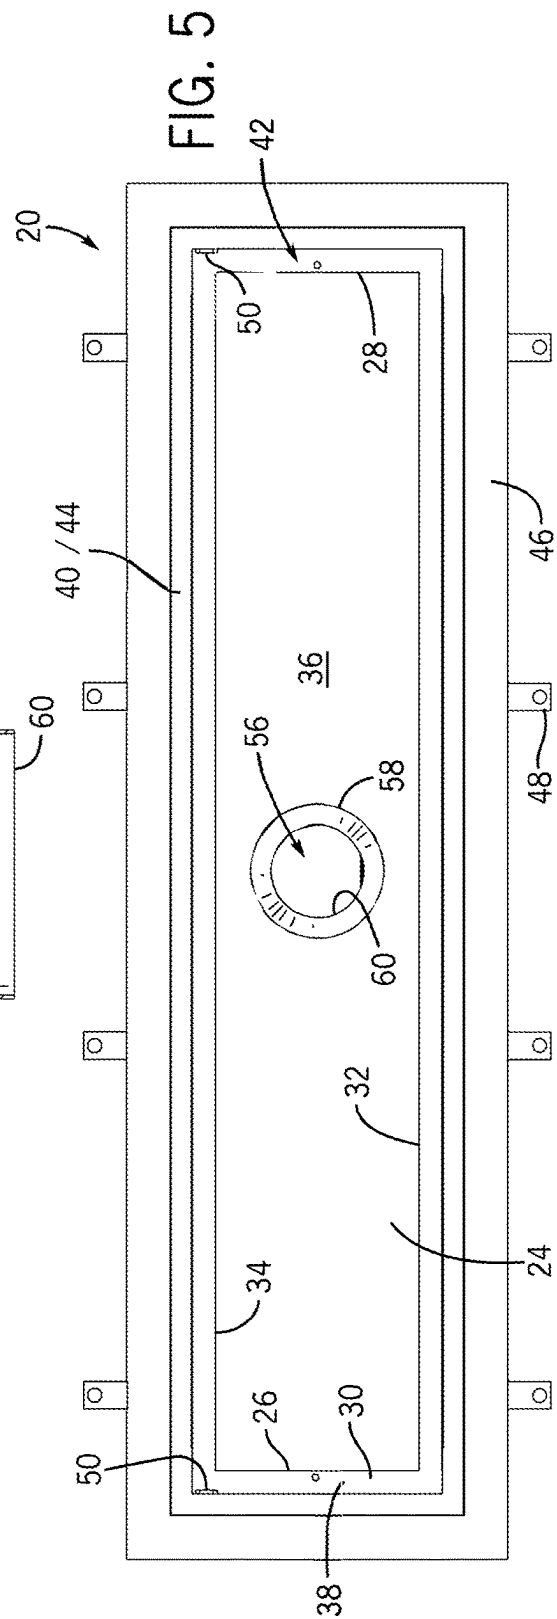


FIG. 3

4
G.
F.

உ
க
க

1

ELEVATOR TRENCH DRAIN**CROSS-REFERENCE TO RELATED APPLICATION**

This application is a continuation patent application of U.S. patent application Ser. No. 17/228,448, filed on Apr. 12, 2021, which is a continuation of U.S. patent application Ser. No. 16/780,623, filed on Feb. 3, 2020, which is a continuation of U.S. patent application Ser. No. 16/271,324, filed on Feb. 8, 2019, which is a continuation of U.S. patent application Ser. No. 15/689,896 filed on Aug. 29, 2017, which is a continuation of U.S. Ser. No. 15/262,179 filed on Sep. 12, 2016 and which claims the benefit of U.S. Provisional Patent Application No. 62/298,159 filed Feb. 22, 2016, which are hereby incorporated by reference for all purposes as if set forth in their entirety herein.

STATEMENT OF FEDERALLY SPONSORED RESEARCH OR DEVELOPMENT

Not applicable.

TECHNICAL FIELD

This disclosure relates to drains and, in particular, trench drains for use proximate the threshold of an elevator door to prevent water from flowing down an elevator shaft.

BACKGROUND

Nearly all multi-story buildings are required to have fire prevention systems installed. Such fire prevention systems include water lines and sprinklers which, in the event of the detection of a fire, can distribute large volumes of water in the vicinity of a fire. Such fire prevention systems are particularly of importance in multi-story buildings because, in the event of a fire, there may not be an easy way for firefighters at ground level to get several stories up before the fire has had a chance to spread.

However, it is also often the case that multi-story buildings are not well-equipped to accommodate the drainage of such large volumes of water, especially above ground level. In many instances, if the building includes one or more elevators, then the water provided by the fire prevention system collects on the floors above ground level and may have a tendency to flow down the elevator shaft. Because there is the possibility that both the elevator car and other equipment may exist between the floor and the elevator pit, water drainage into the elevator shaft is to be avoided.

Some drainage systems have been developed to address this problem. See e.g., PCT International Publication No. WO 98/22381 and U.S. Pat. No. 8,800,226. Such systems generally route water laterally into vertical pipes to limit the amount of water entering the open elevator shaft.

SUMMARY

However, the current state of the art drains either need to have great depth to account for the volumes of water that flow therethrough or run the risk of having water overflow from the drain into the elevator shaft.

To prevent draining of water into an elevator and to avoid needing have a deep drain, an improved elevator trench drain is disclosed herein with a low profile that still accommodates high flows of water therethrough. This elevator trench drain may be located at a lower threshold of an

2

elevator door between the floor of the building and the elevator shaft. In this position, any water that collects on the floor (due to, for example, a sprinkler system operating) may be collected in the elevator trench drain and controllably routed to a drainage pipe, rather than simply flowing down into the open elevator shaft. Among other things, this drain can have a low profile, can have a multi-diameter drain opening that builds a head pressure to increase flow out of the drain, and can have a hinged grating for easy installation and access to the trench.

According to one aspect, an elevator trench drain includes a trench and a drain passageway. The trench includes a base wall with peripheral side walls that extend upwardly from the base wall to a trench volume therein. The drain passageway extends downwardly from the base wall of the trench and places the trench volume in fluid communication with a lower opening of the drain passageway (which may be in connection with further drain pipes for routing of the collected water). The drain passageway has a first section proximate the base wall defining a first cross-sectional area and a second section distal the base wall defining a second cross-sectional area. The second cross-sectional area is less than the first cross-sectional area and this reduction from the first cross-sectional area to the second cross-sectional area creates a head pressure that increases the flow out of the lower drain passageway opening during use.

An elevator trench drain of this type may be disposed proximate a lower edge of an elevator door to assist in drainage in the event that water collects on the floor of a multi-story building and to prevent water from draining into the elevator pit in an uncontrolled fashion.

In many forms, the elevator trench drain will have a grating. In some forms, this grating may be hinged connected to the trench. To provide this hinged connection, the peripheral side walls of the trench may have a pair of opposing elongated slots formed in them and the grating may have a pair of posts on opposing ends thereof. Each of the pair of posts on the grating can be received in a respective one of the pair of opposing elongated slots of the trench to establish an axis of rotation and to permit the assembly/disassembly of the grating to the drain by temporarily axially misaligning the posts relative to the slots. In some forms, the pair of opposing elongated slots may be integrally formed in the peripheral sidewalls of the trench (by welding or casting, for example). It is contemplated that in some forms, each of the slots may positively extend inwardly into the trench from the sidewall. For example, the pair of opposing elongated slots may each be a wall that extends generally perpendicularly from the peripheral side wall of the trench volume and this wall may form a closed loop forming one of the slots into which one of the posts of the grating is received.

With respect to the drain passageway, the first section may have a first distance of downward extension having the first cross-sectional area which is constant along the first distance of downward extension and the second section may have a second distance of downward extension having the second cross-sectional area which is constant along the second distance. In some forms, the first section and the second section may each be tubular and the first and second cross-sectional areas may both be circular. An intermediate section may be between the first section and the second section of the drain passageway in which the intermediate section continuously connects the first section to the second section and reduces in diameter between the two sections. The intermediate section may extend over a distance of downward extension and gradually tapers inward from the first

3

section to the second section. This intermediate section may be frusto-conical but may have other types of taper. For example, the first section and the second section may have vertically-extending walls and the intermediate section may be angled 45 degrees relative to the vertically extending walls as the intermediate section extends downward and inward from the first section to the second section. Alternatively, it is contemplated that the reduction in cross section could occur in a single step or may have alternative angular tapers.

In some forms, the drain passageway may be centrally aligned in the base wall of the trench while, in other forms, the drain passageway may be offset from the center in the base wall of the trench. Such variations may be made depending on the particular structure in which the drain is used.

In some forms, the peripheral side walls of the trench may include two pairs of linear parallel segments such that the trench is rectangular in shape. In some forms, a flange may be disposed outward of the peripheral side walls. Once installed, floor coverings (for example, tile, carpet, and so forth) may cover this flange. In other forms of the drain, this flange may be absent.

In some forms, to provide sufficient head pressure in the drain passageway, a ratio of a diameter of the first section to a diameter of the second section may be 1.5 or may be more generally in a range of 1.4 to 1.6.

In some forms, a depth of elevator trench drain exclusive of the drain passageway may be 1.75 inches. Among other things, this minimizes the height requirement for the installation of the elevator trench drain into the floor (which takes up the inter-story space between adjacent floors). Despite have relatively shallow depth, the drain passageway of the elevator trench drain may be configured to permit the flow of 100 gallons per minute or more of water therethrough.

These and still other advantages of the invention will be apparent from the detailed description and drawings. What follows is merely a description of some preferred embodiments of the present invention. To assess the full scope of the invention, the claims should be looked to as these preferred embodiments are not intended to be the only embodiments within the scope of the claims.

BRIEF DESCRIPTION OF THE FIGURES

FIG. 1 is a perspective view of an elevator trench drain in which a grating is closed over the trench.

FIG. 2 is a perspective view of the elevator trench drain of FIG. 1 in which a grating is hinged open, revealing the inner volume of the trench and the top side of the drain passageway.

FIG. 3 is a detailed exploded book view of one side the hinge connection between the grating and the trench illustrating how the post of the grating is received in the slot of the trench.

FIG. 4 is a detailed cross-sectional side view of the drain passageway of the elevator trench drain illustrating the reduction in cross-sectional area from the top section to the bottom section of the drain passageway.

FIG. 5 is a detailed top view of drain passageway further illustrating the profile of the upper and lower sections of the drain passageway as seen from above.

DETAILED DESCRIPTION

Referring first to FIGS. 1 and 2, an elevator trench drain 10 is illustrated in closed and opened positions, respectively.

4

An elevator trench drain of this type is designed to be installed along the width of the lower edge or threshold of an elevator door. This drain can provide a drainage pathway for fluids, for example water from sprinkler systems. In the absence of such a drain in a situation in which a sprinkler system has been activated, water from the system might collect on the floor and potentially drain into the elevator or elevator shaft. If that were to happen, the elevator system could malfunction in the event of an emergency or be otherwise damaged.

The elevator drain 10 is generally rectangular in the exemplary form shown; however, in other forms, the elevator trench drain 10 may have generally different shapes or aspect ratios which may be custom to the particular application. Because the exemplary elevator trench drain 10 is rectangular, it extends between a pair of lateral ends 12 and 14 which define an overall length of the assembly and extends between a pair of forward and backward ends 16 and 18 which define an overall width of the assembly.

In the illustrated assembly, the elevator trench drain 10 has two main parts including a trench 20 and a grating 22. During use, the water will flow through the grating 22 and collect in the trench 20, though which the water is subsequently drained or evacuated.

The trench 20 has a base wall 24 with peripheral side walls 26 extending upwardly from the base wall 24. Because the particular drain 10 is rectangular, the peripheral side walls 26 include a pair of lateral side walls 28 and 30, a front wall 32, and a rear wall 34. In aggregate, the various walls of the trench 20 defining a trench volume 36 inside the trench 20. In the instant case, this trench volume 36 is generally rectangular in shape being established by the base wall 24, the pair of lateral side walls 28 and 30, the front wall 32, and the rear wall 34.

The various peripheral side walls 26 of the trench 20 also include an inwardly extending step 38 between an upper peripheral lip 40 and the base wall 24 that defines a grating seat 42 for the reception of the grating 22. In the form illustrated, this step 38 occurs approximately halfway between an upper surface 44 of the upper peripheral lip 40 and the base wall 24. During use, water flowing into the trench 20 may also collect (at least to some extent) in the trench volume 36 partially occupied by the grating 22.

The trench 20 may also include features that assist in the installation of the elevator trench drain 10 into the floor, although such features may not be found in all designs. In the particular form illustrated, the trench 20 includes an outwardly-extending peripheral flange 46 that is offset slightly downward from the upper peripheral lip 40. This peripheral flange 46 may receive floor coverings (for it, carpet, tile, cast materials such as concrete) over it such that the top of the floor covering is roughly flush with the upper surface 44 of the upper peripheral lip 40. There may also be anchor straps 48 that extend outwardly past the flange 46 which are employed during the installation of the trench 20 into the surrounding building structure.

With brief forward reference being made to FIG. 3, to hingedly receive the grating 22 in the trench 20, each of the lateral side walls 28 and 30 may include a slot 50 formed therein such that the slots 50 collectively define a pair of opposing slots. In the particular form illustrated in FIG. 3, the slot 50 is formed above the step 38 in the lateral side walls 28 and 30 proximate the rear wall 34. To accommodate entry of the respective post 52 on the grating 22, these slots 50 are elongated in the front to rear direction such that the grating 22 may be slightly twisted relative the trench 20 and the eventual hinged axis of rotation to provide sufficient

5

clearances for assembly of the posts **52** into the slots **50**. In the form illustrated, the slots **50** are integrally formed in the peripheral side walls **26** of the trench **20** and are formed by a wall **54** that extends generally perpendicularly from the peripheral side wall **26** of the trench **20** and forms a closed loop that establishes the slot **50**.

With particular reference now being made to FIG. **4**, the trench **20** includes a drain passageway **56** that extends downwardly the base wall **24** of the trench **20**. As illustrated, the drain passageway **56** is centrally located along the width and length of the trench **20**. However, it is contemplated that the drain passageway **56** might be located otherwise such as, for example, at one end of the base wall **24** of the trench **20** or offset from center in one or both of the length and width directions. This drain passageway **56** places the trench volume **36** (at an upper opening **58** formed in the base wall **24**) in fluid communication with a lower opening **60** of the drain passageway **56**. The lower opening is typically connected in use to a drain pipe such as a 4 inch drain pipe for further routing of the drained water.

As best seen in FIGS. **4** and **5**, the drain passageway **56** has multiple sections as it extends downwardly from the upper opening **58** to the lower opening **60**. In the particular form illustrated, there are three sections including an upper section **62** proximate the upper opening **58** in the base wall **24**, a lower section **64** proximate the lower opening **60** of the drain passageway **56**, and an intermediate section **66** between the upper section **62** and the lower section **64**. The upper section **62** and the lower section **64** each have a constant respective cross-sectional area over their axial height or distance of extension. In the illustrated embodiment, the upper section **62** is circular having a diameter of 6 inches and the lower section **64** is circular having a diameter of 4 inches (to match standard drain pipe which is connected to the outlet). The intermediate section **66** between the upper section **62** and the lower section **64** includes an approximately 45 degree taper that transitions the diameter between the respective sections **62** and **64** above and below it. Although the taper is illustrated as extending entirely from the first section to the second section, it is contemplated that there may be more than one differently angled tapered regions or radially extending step in this intermediate section. While circular cross-sections are found in the illustrated design as can be best seen in FIG. **5**, it is contemplated that other drain cross sections might also be used if those reduce in cross-section area from the upper section to the lower section.

Among other things, the profile of this drain passageway **56** helps to improve the flow rate of water collecting in the trench **50** through the drain passageway **56**. The upper section **62** creates a head pressure which causes the acceleration of the water flowing downward into the lower section **64**. Although it is contemplated that the intermediate section **66** might be omitted (i.e., that there could simply be a flat step between sections **62** and **64** which is perpendicular to the central axis of the drain passageway **62**), the taper or angling of the intermediate section **66** can further enhance the flow from the upper section **62** to the lower section **64** because it assists in directing the flow of the water in a non-turbulent manner from the upper section **62** into the lower section **64**. Among other things, the reduction in diameter to improve and increase flow rate can help enable a low profile (i.e., thin) design so that the elevator trench drain **10** may be installed in smaller spaces without increasing the depth of the floor to accommodate for the drain.

Some exemplary and non-limiting dimensions are now provided for the trench **20**. The height of the trench **20** is

6

contemplated as being typically 1.75 inches overall (exclusive of the drain passageway **56**), although other depths may also be used depending on the installation context or needs of the customer. A typical width may be 13.5 inches overall with an 11.4375 inch grating seat area. The finished perimeter flange may be approximately 1 inch from the upper peripheral lip **40**. The overall length of channel may typically be in a range of 38 to 120 inches. The drain passageway **56** is illustrated as being hydraulically engineered from 6 inches to 4 inches in a funnel style outlet to increase head pressure on the 4 inch section to promote flow (with flow in excess of 100 gallons per minute being targeted in many conditions to meet code and achieved using this passageway structure). This ratio of the diameters from the first section to the second section is approximately 1.5 (6 inches to 4 inches), but it is contemplated that other similar ratios may also be used, for example, in the range of 1.3 to 1.7 or more narrowly in the range of 1.4 to 1.6. The entire trench construction may be provided in Type 304 stainless steel but may also be in Type 316 stainless steel in certain applications or based on customer preference.

The grating **22** is also generally rectangular in shape to match and fit into the grating seat **42** of the trench **20**. The exemplary grating **22** includes a first plurality of lengthwise-extending bars **68** which are joined to a second plurality of widthwise-extending supports **70** to form a grid. However, in other forms, the grating pattern may be different or otherwise embellished to provide a desired aesthetic appearance. On the rear side of the grating **22**, there are a pair of oppositely facing posts **52** that are located for reception into the slots **50** of the trench **20** as illustrated in FIG. **3**. FIGS. **3** and **4** also illustrate that each of the first plurality of lengthwise-extending bars **68** includes a bottom surface **100**, facing and positioned a first distance **102** from the base wall **24**, a top surface **104**, opposite the bottom surface **100** and spaced a second distance **106** from the base wall **24** greater than the first distance, and a pair of side surfaces **108** extending between the bottom surface **100** and the top surface **104**. As shown in FIG. **3**, the side surfaces **108** are sub-divided into two portions **112**, **116**. The lower portion **112** of the side surface **108** is oriented substantially parallel to the front or first wall **32** and the upper portion **116** of the side surface **108** is oriented oblique to the front wall **32**. More specifically, FIG. **3** shows that the upper portion **116** of the side surfaces **108** are oriented oblique to the front wall **32** in a vertical orientation (e.g., measured vertically). FIG. **3** also illustrates that each of the lengthwise extending bars **68** include a lower edge **120** where the bottom surface **100** meets the side surface **108** and an upper edge **124** where the top surface **104** meets the side surface **108**. In the illustrated embodiment, the lower edge **120** is spaced a second distance **106** from the base wall **24** while the upper edge **124** is spaced a first distance **102** from the base wall **24** that is greater than the second distance **106**. FIGS. **1** and **3** also show that the upper edge **124** is both parallel to and positioned closer to the front wall **32** than the lower edge **120**. The lower edge **120** is also parallel the front wall **32**. Each bar **68** also defines a longitudinal axis **132** there-through that is oriented parallel to the front wall **32**.

As noted above, by angularly twisting the axis of the posts **52** (which are co-axial with one another) they can be slid into the slots **50** of the trench **20** to provide a hinged connection to open the grate as generally illustrated in FIG. **2**. There may be some range of motion restrictions depending on the depth of the grating seat **42** and the placement of the posts **52** on the grating **22**.

7

The grating **22** may be a stainless steel wire grating and may be approximately 2 inches shorter than the specified channel length to accommodate installation of the grating **22** into the trench **20** and provide some side clearances. As with the trench **20**, the grating **22** may be manufactured from Type 304 stainless steel or Type 316 stainless steel. In one exemplary form, the grating **22** may features an open area of 64.9 square inches per linear foot of grating. Wires, bars, and supports may be held by press fit and welded to support trusses (i.e., the bars **68** may be press fit and welded into supports **70** or vice versa). Some gratings may be a fabricated stainless steel slotted grate with an open area of 35.9 square inches per linear foot. In some forms, grating height may be 29/32 inches tall and grating width may be 11.375 inches wide.

Accordingly, an elevator trench drain is disclosed that accommodates high flow rates (up to and exceeding 100 gallons per minute) without having a deep trench depth or necessarily having multiple outlets to accommodate slower flows. The improved drain passageway permits high flow rates without compromising other dimensions of the product or complicating the drain system with additional, multiple fluid connections.

It should be appreciated that various other modifications and variations to the preferred embodiments can be made within the spirit and scope of the invention. Therefore, the invention should not be limited to the described embodiments. To ascertain the full scope of the invention, the following claims should be referenced.

What is claimed is:

1. A trench drain comprising:
 - a trench including a base wall, a first wall extending from the base wall, and a second wall extending from the base wall, the base wall, the first wall, and the second wall at least partially defining a trench volume therein, the trench having a trench height, a trench length, and a trench width, the trench length is greater than the trench width, and the trench length is at least 60 times the trench height;
 - a drain passageway extending through the base wall and including a distal end opposite the base wall, the distal end having an outlet, the outlet having an inner diameter that is no greater than 4 inches; and
 - a grate at least partially positionable within the trench volume, the grate configured to allow fluid to pass therethrough.
2. The trench drain of claim 1, wherein the grate includes a plurality of bars configured to allow fluid to pass therebetween, wherein at least one of the plurality of bars includes a bottom edge positioned a first distance from the base wall and a top edge positioned a second distance from the base wall greater than the first distance, and wherein the top edge is positioned closer to the first wall than the bottom edge.
3. The trench drain of claim 1, wherein the drain passageway includes a first section connected to the base wall defining a first diameter and a second section distal the base wall defining a second diameter that is less than the first diameter.
4. The trench drain of claim 3, wherein a ratio of the first diameter to the second diameter is between 1.3 and 1.7.
5. The trench drain of claim 3, wherein a ratio of the first diameter to the second diameter is between 1.4 and 1.6.
6. The trench drain of claim 3, wherein a reduction from the first diameter to the second diameter creates a head pressure that increases flow out of the outlet.
7. The trench drain of claim 1, wherein the trench height is 1.75 inches.

8

8. The trench drain of claim 1, wherein the drain passageway is configured to permit flow of at least 75 gallons per minute of water therethrough.

9. A trench drain comprising:

- an elongated trench defining a trench volume therein, the elongated trench having a trench height, a trench length, and a trench width, the trench length is at least eight times the trench width, and the trench length is at least 60 times the trench height;
- a drain passageway open to the trench volume, the drain passageway extending away from the trench volume and including a distal end spaced apart from the trench volume, the distal end having an outlet, the outlet having an interior diameter that is no greater than 4 inches; and
- a grate at least partially positioned within the trench volume, the grate including a plurality of elongated openings through which fluid can enter the trench volume, the elongated openings having an opening length and an opening width, the opening length being greater than the opening width, and the trench length oriented substantially parallel to the opening length.

10. The trench drain of claim 9, wherein the drain passageway is configured to permit flow of at least 75 gallons per minute of water therethrough.

11. The trench drain of claim 9, wherein the drain passageway includes a first section connected to the trench volume defining a first diameter and a second section distal the trench volume defining a second diameter that is less than the first diameter.

12. The trench drain of claim 11, wherein a ratio of the first diameter to the second diameter is between 1.3 and 1.7.

13. The trench drain of claim 11, wherein a ratio of the first diameter to the second diameter is between 1.4 and 1.6.

14. The trench drain of claim 11, wherein a reduction from the first diameter to the second diameter creates a head pressure that increases flow out of the outlet.

15. A trench drain comprising:

- an elongated trench defining a trench volume therein, the elongated trench having a trench height, a trench length, and a trench width, the trench length being greater than the trench width, the trench height is no greater than 1.75 inches, and the trench length is at least 60 times the trench height;
- a drain passageway open to the trench volume, the drain passageway extending away from the trench volume and including a distal end spaced apart from the trench volume; and
- a grate at least partially positioned within the trench volume, the grate including a plurality of elongated openings through which fluid can enter the trench volume, the elongated openings having an opening length and an opening width, the opening length being greater than the opening width, and the opening length being oriented substantially parallel to the trench length.

16. The trench drain of claim 15, wherein the drain passage way includes an upper section defining a first diameter proximate the trench volume and a lower section defining a second diameter proximate the distal end, and wherein the second diameter is less than first diameter.

17. The trench drain of claim 16, wherein a ratio of the first diameter to the second diameter is between 1.3 and 1.7, and wherein the distal end has an inner diameter that is no greater than 4 inches.

18. The trench drain of claim **16**, wherein a reduction from the first diameter to the second diameter creates a head pressure that increases flow out of the distal end.

19. The trench drain of claim **15**, further comprising:

a base wall having peripheral side walls extending 5
upwardly therefrom and an outwardly-extending
peripheral flange that together define at least a portion
of a perimeter of the trench; and
a grate seat disposed between an upper peripheral lip and
the base wall, and 10

wherein the grate is hingedly connected to the trench,
wherein the grate seat is configured to receive the grate
and the peripheral side walls of the trench have a pair
of opposing elongated slots formed therein and the
grate has a pair of posts on opposed ends thereof, 15
wherein each of the pair of posts on the grate are
received in a respective one of the pair of opposing
elongated slots of the trench to establish an axis of
rotation, and wherein the axis of rotation is movable
relative to the trench. 20

20. The trench drain of claim **19**, wherein the elongated
slots are sized so that the posts can be inserted into and
removed from the slots by moving the axis of rotation
relative to the trench.

* * * * *

25