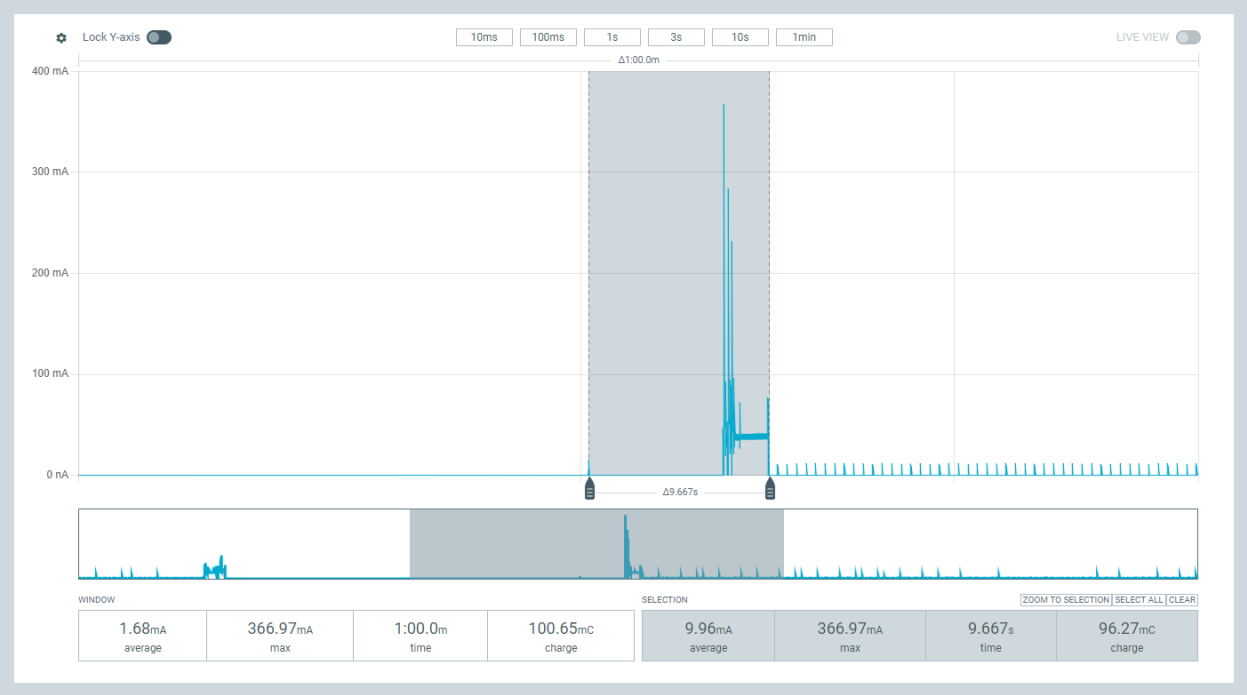

Initial EoRa-S3-900TB, Receiver power on.

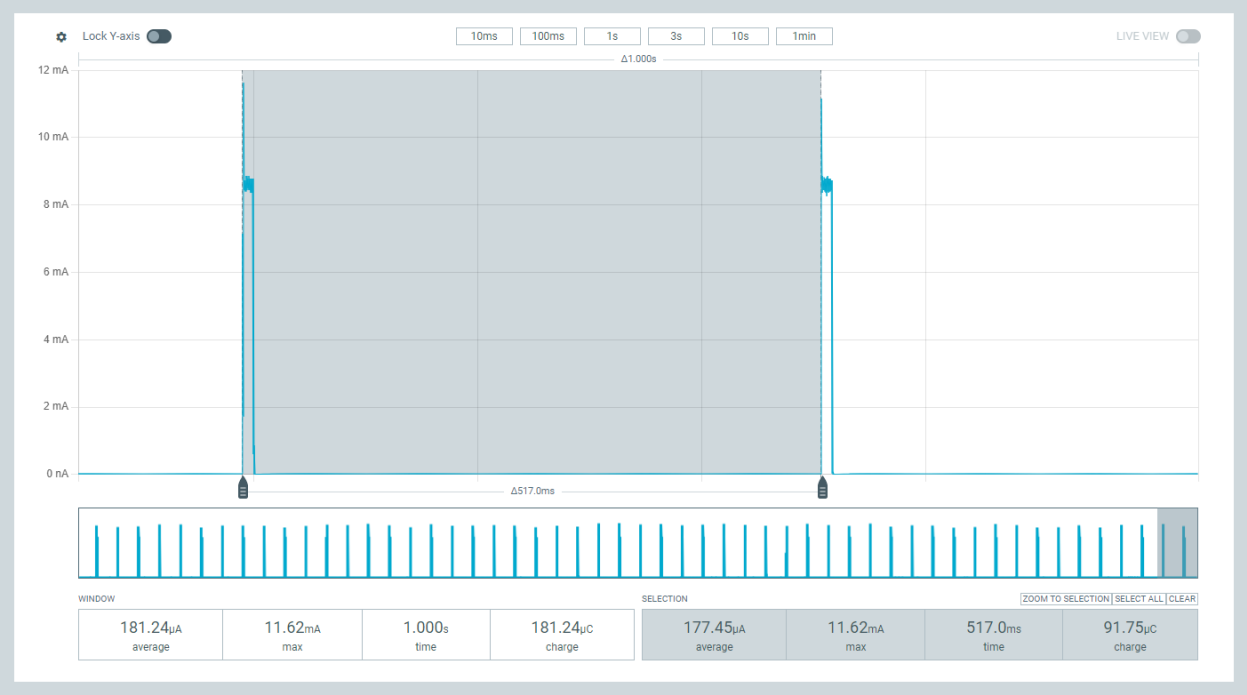

One complete atoDutyCycle (Active listening for preamble; then LoRa inactive).

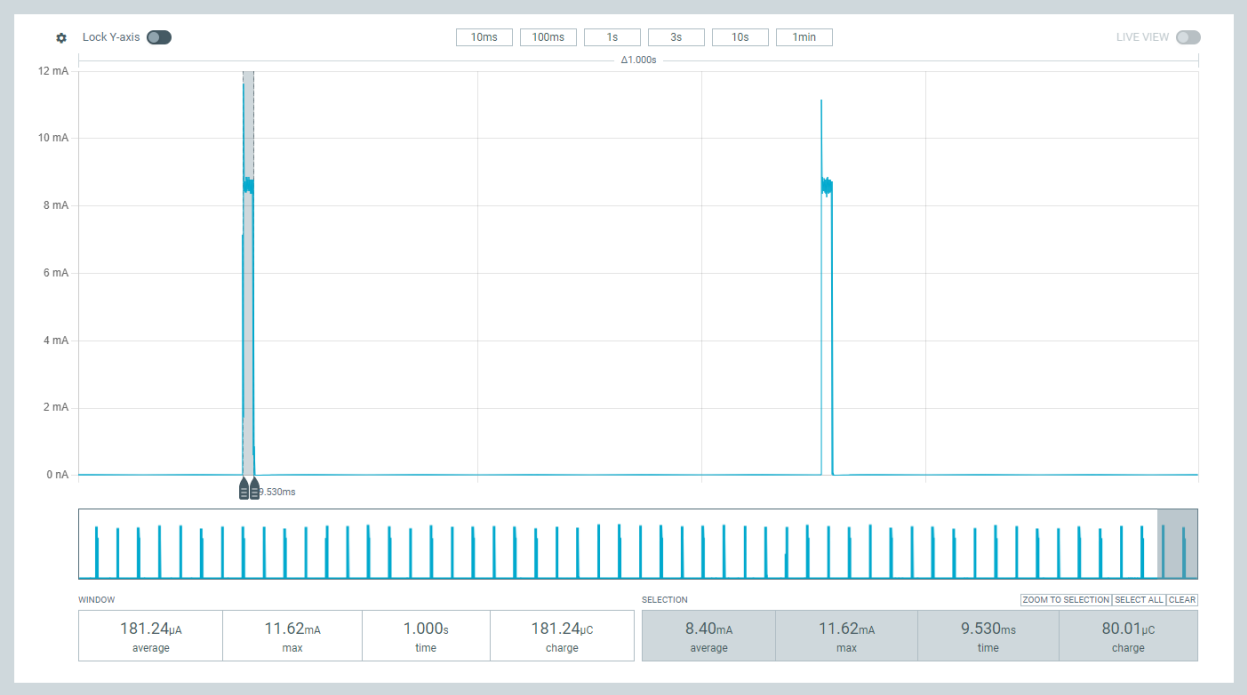

Active part of autoDutyCycle(); listening.

WOR Preamble received, Cmd = 1. Flat line, radio.sleep();

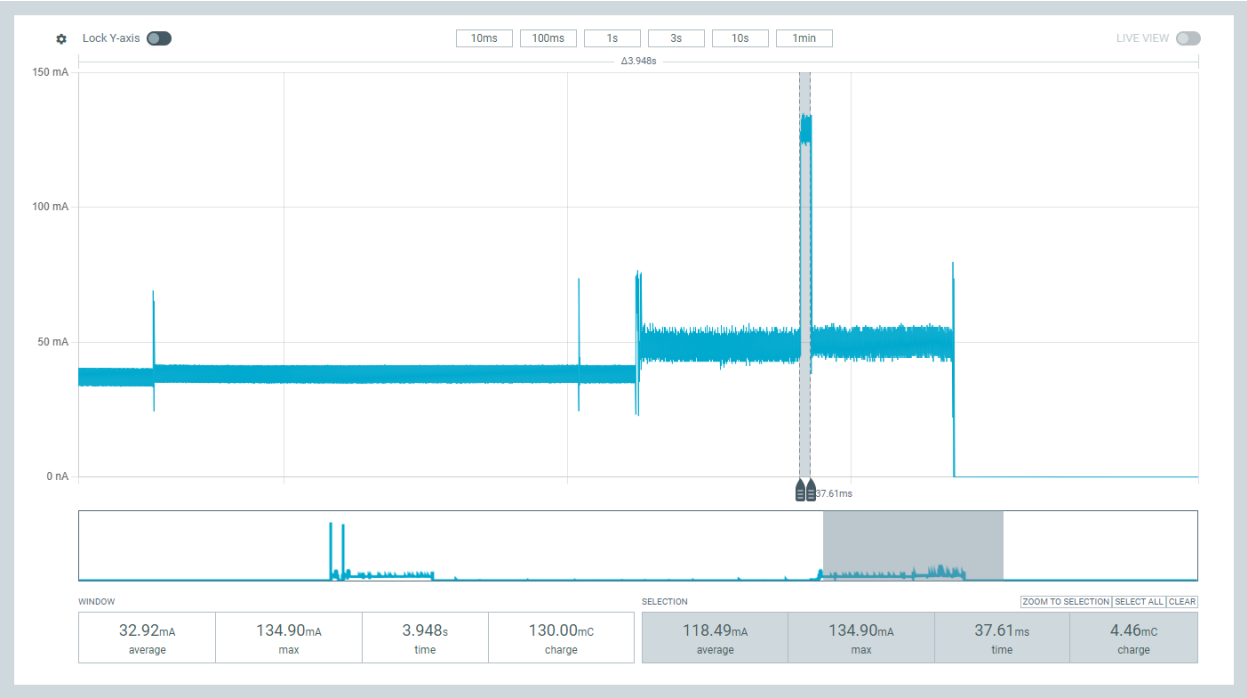

ACK Received

Called radio.sleep(), no transmit, no receive (powered down).

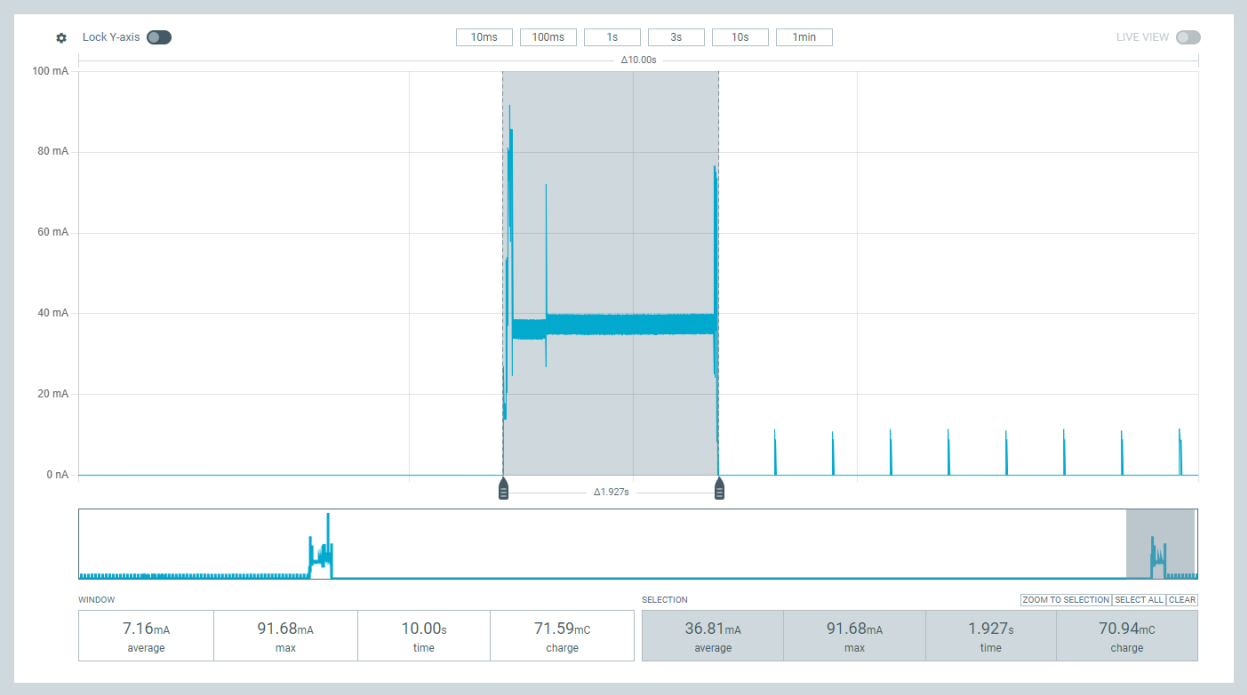

Timer EXT0 wake-up, radio.reset(), radio.init(), enterDeepSleepEXT0.

Receiver in EnterDeepSleepEXT0 listening for next preamble for next WOR preamble to Wake-up ESP32-S3.

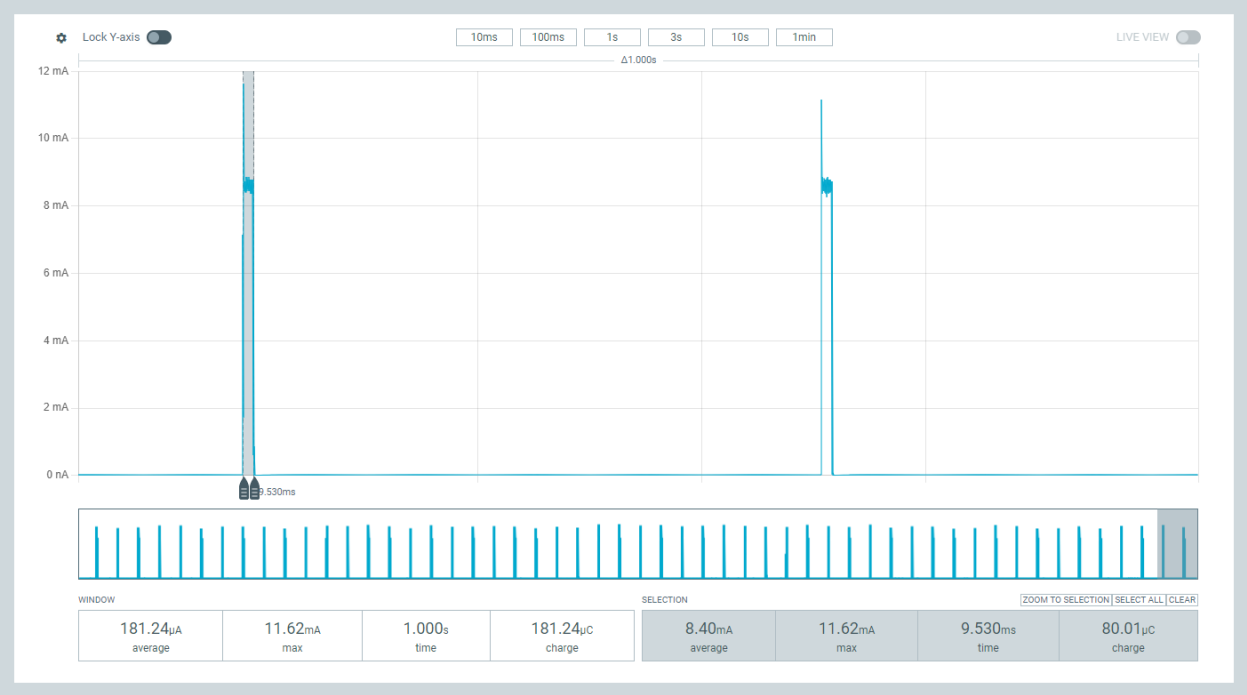

Single listening event during autoDutyCycle();