

The device is rather **clever**, really. It can take soil samples with an impressive degree of sophistication, offering both **single-layer and two-layer separation** for those times you fancy a bit more detail. Everything is **fully automated**, so you can take up to **three samples in a row—up to 60 centimetres deep**—without ever leaving the comfort of the driver's seat. **Efficiency is rather maximised**, you see. The containers are **weatherproof**, naturally, keeping your samples safe whatever the weather decides to throw at you. And, to top it off, the whole contraption is **compact and versatile** enough to mount on a variety of vehicles, making it remarkably **adaptable** for most fieldwork.



THE MP-2.60 IS AVAILABLE WITH PRACTICAL ACCESSORIES SUCH AS A POWER PACK AND A CUSTOM MOUNTING FRAME THAT ALLOWS EASY INSTALLATION ON PICKUPS, TRAILERS, OR UTILITY VEHICLES—PERFECT FOR USE IN DIVERSE AND REMOTE ENVIRONMENTS, WHERE A BIT OF THINKING AHEAD MAKES ALL THE DIFFERENCE.

“

The MP-2.60 has completely streamlined our soil sampling process. It's fast, reliable, and easy to operate—even in tough conditions. The optional power pack and mounting frame make it incredibly versatile in the field.

”




MULTIPROBE MP-2.60



A cutting-edge, **fully automatic soil sampling** device designed to extract **N-min samples** up to a depth of **60 cm**.

Bodenprobetechnik Peters GmbH
Am Fliegerhorst 11, D-49610 Quakenbrück
Tel.: +49 (0) 5431-93644-0
www.techbyp.com



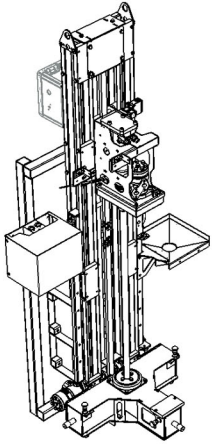

Automatic Layer Separation:

The device automatically separates and empties samples without manual intervention, streamlining the entire process.

Adjustable Sampling Depth:


Set the depth in centimeters for either single-layer or 2-layer sampling, with a maximum depth of 60 cm.

Penetration Speed Monitoring:


Adjustable sensitivity to monitor and control penetration speed during sampling.

Smart Sample Management:

The material in the drill rod can be either discarded or assigned to containers based on preset settings.

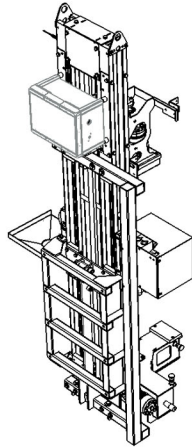

MP-2.60

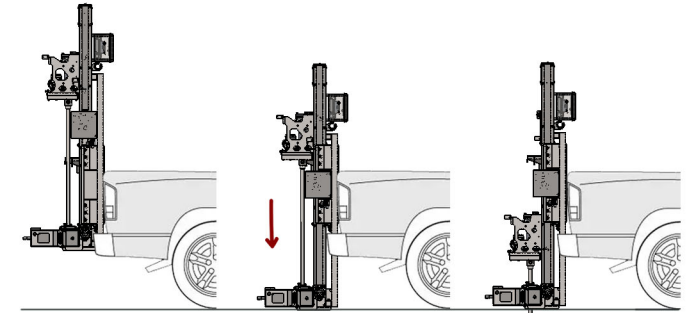

1

The machine is in standard position, ready for operation.

2

The tower goes down for a recommended 40 cm distance.

3

The drill goes down to a depth of up to 60 cm.



ITS EFFICIENT, LOW-WEAR DESIGN, COUPLED WITH A HIGH-FREQUENCY HYDRAULIC HAMMER MECHANISM, ENSURES LONG-LASTING, PROFESSIONAL-GRADE PERFORMANCE.

WWW.TECHBYPC.COM



MP-2.60