

The **MP 3.90** delivers state of the art soil sampling performance with fully automated capabilities reaching depths up to **95 cm**. You can configure it for single layer or up to 3 layer separation, enabling more nuanced soil profiling as required. Its **hydraulic, high frequency hammer** mechanism (**2,200 blows/min**) ensures reliable penetration and retrieval while automatically sorting samples into the correct containers as it withdraws.

The system monitors penetration resistance and stops automatically to prevent equipment damage in tough soil. Designed for **mounting on pickups, trailers or light vehicles**, it fits diverse workflows and environments. Its **efficient, low wear design** reduces maintenance demands, while **weather proof sample containers** ensure integrity in any conditions. The **MP 3.90** is a compact, adaptable solution built for **long term, professional field use**.



THE MP-3.90 IS AVAILABLE WITH PRACTICAL ACCESSORIES SUCH AS A POWER PACK AND A CUSTOM MOUNTING FRAME THAT ALLOWS EASY INSTALLATION ON PICKUPS, TRAILERS, OR UTILITY VEHICLES—PERFECT FOR USE IN DIVERSE AND REMOTE ENVIRONMENTS.

“

The MP 3.90 makes soil sampling faster and more consistent than anything I've used before. Since mounting it on my pickup, I can collect up to three clean layers in one go—no interruptions, no manual handling, just efficient, automated sampling.

”




MULTIPROBE MP-3.90



State-of-the-art soil sampling device designed for fully automatic sample extraction down to **95 cm depth**.


Bodenprobetechnik Peters GmbH
Am Fliegerhorst 11, D-49610 Quakenbrück
Tel.: +49 (0) 5431-93644-0
www.bodenprobetechnik.de



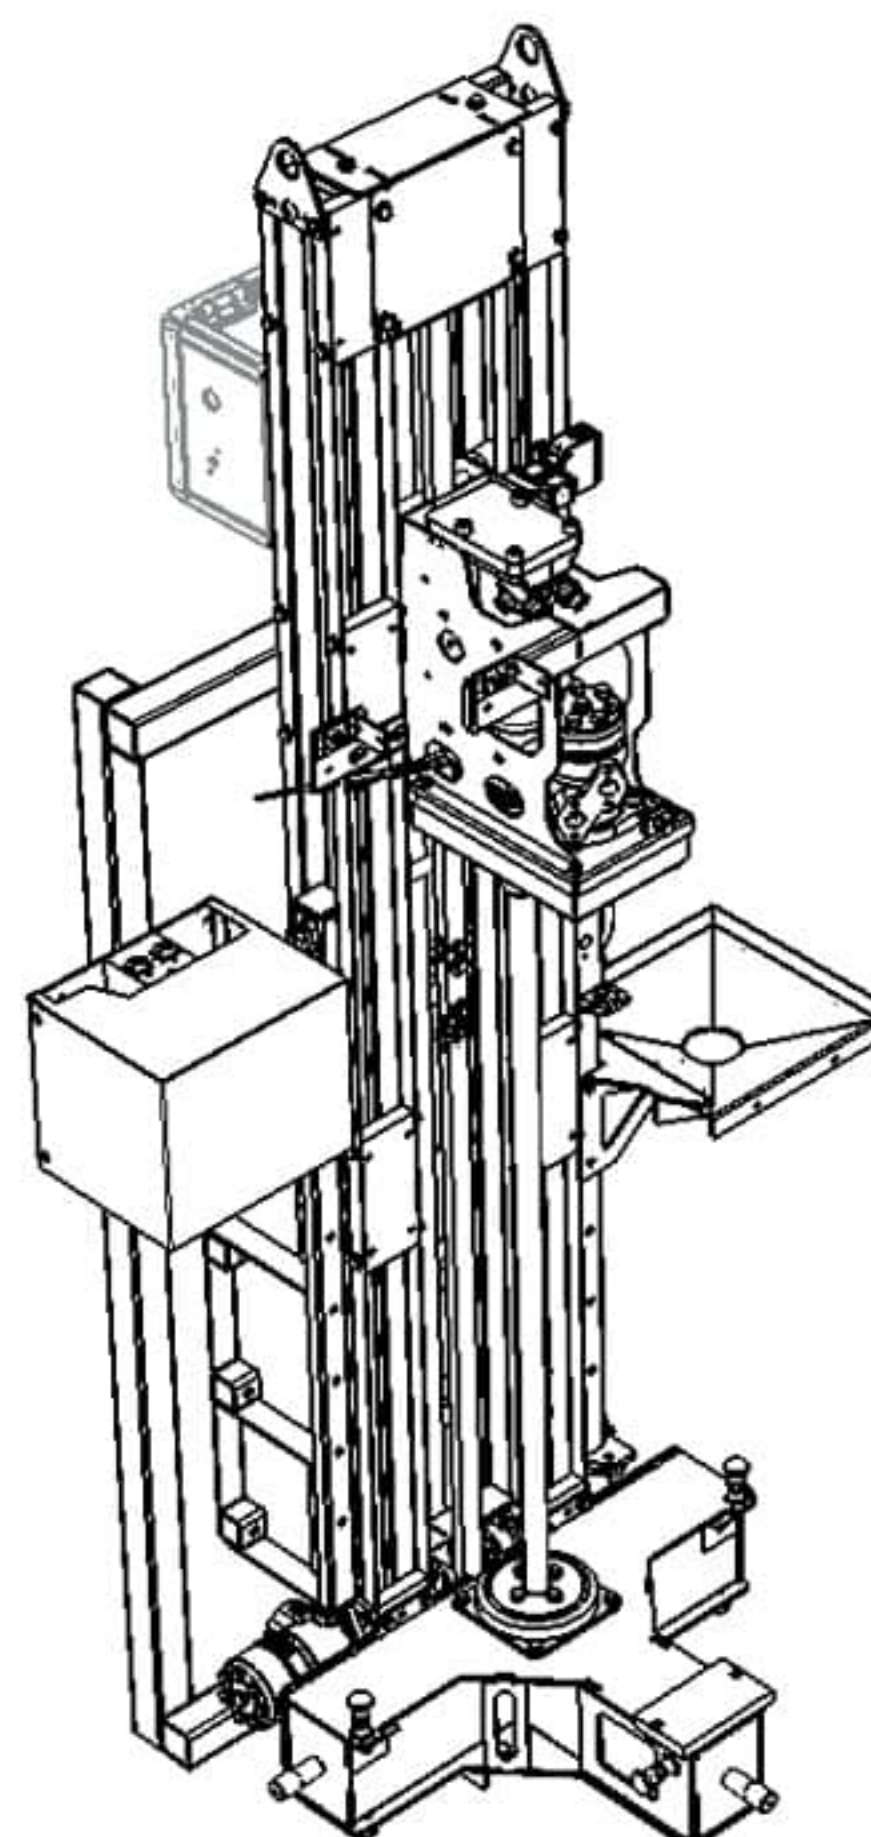

Optional 3-layer separation:
for precise horizon-specific sampling

Without layer separation:
up to three consecutive samples can be taken without the operator needing to leave the driver's seat

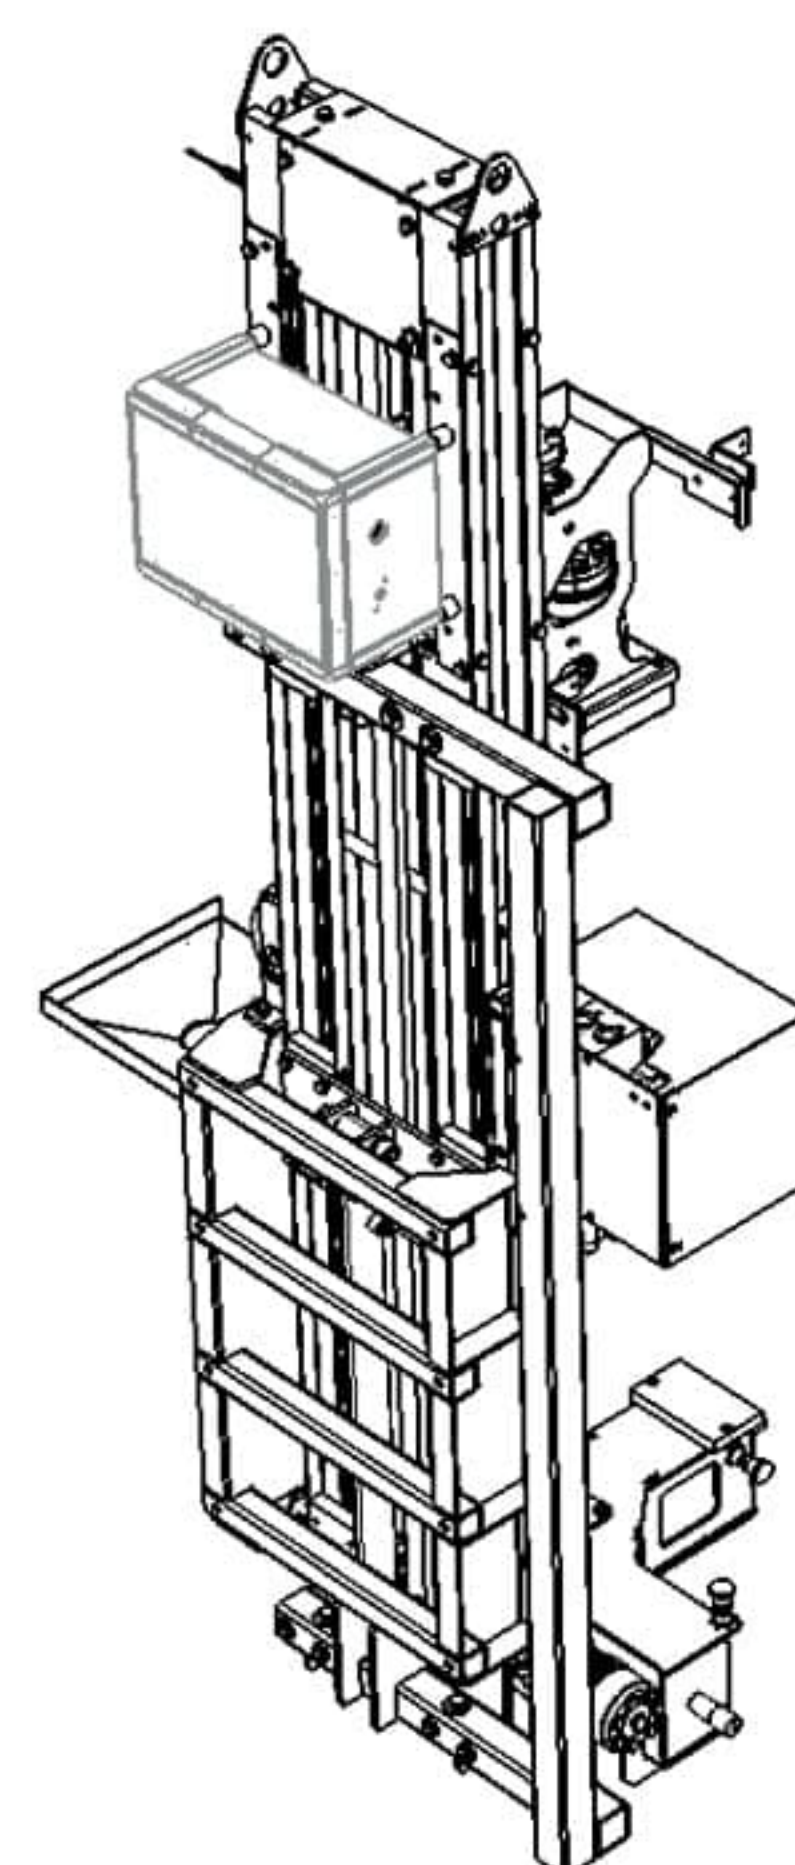


Penetration Speed Monitoring:
Adjustable sensitivity to monitor and control penetration speed during sampling

Automatic shutdown
when encountering excessive resistance (e.g. rocks or compacted soil) to prevent equipment damage



MP-3.90

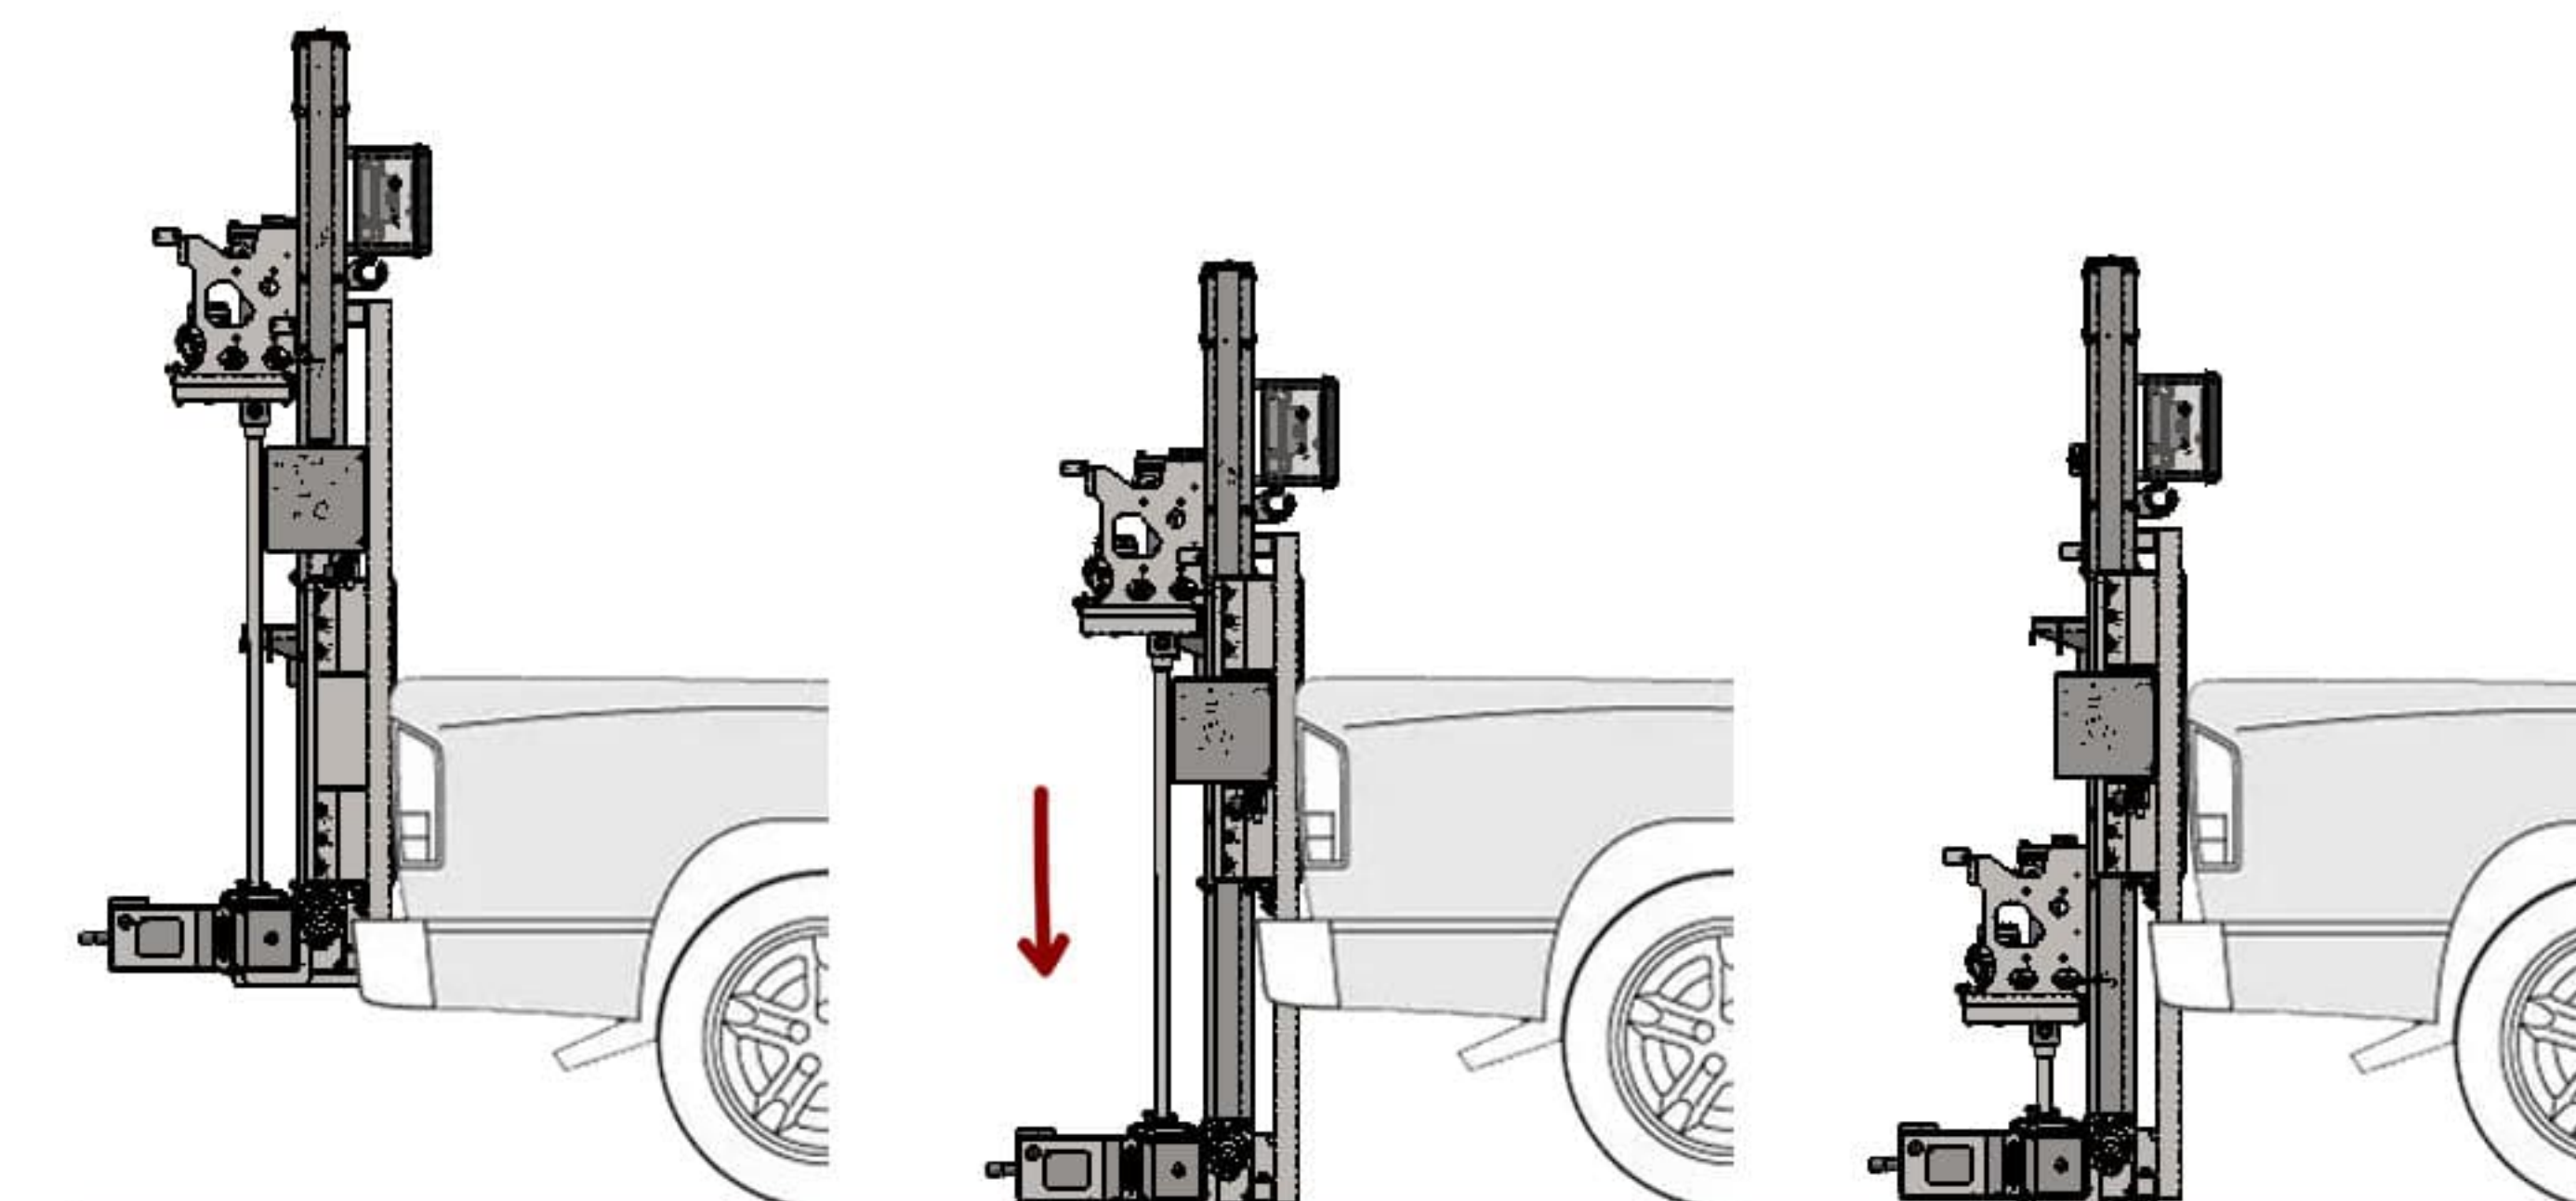

1

The machine is in standard position, ready for operation.

2

The tower goes down for a recommended 40 cm distance.

3

The drill goes down to a depth of up to 95 cm.



ITS EFFICIENT, LOW-WEAR DESIGN, COUPLED WITH A HIGH-FREQUENCY HYDRAULIC HAMMER MECHANISM, ENSURES LONG-LASTING, PROFESSIONAL-GRADE PERFORMANCE.

WWW.TECHBYPCOM



MP-3.90