


MODEL: ID - C01

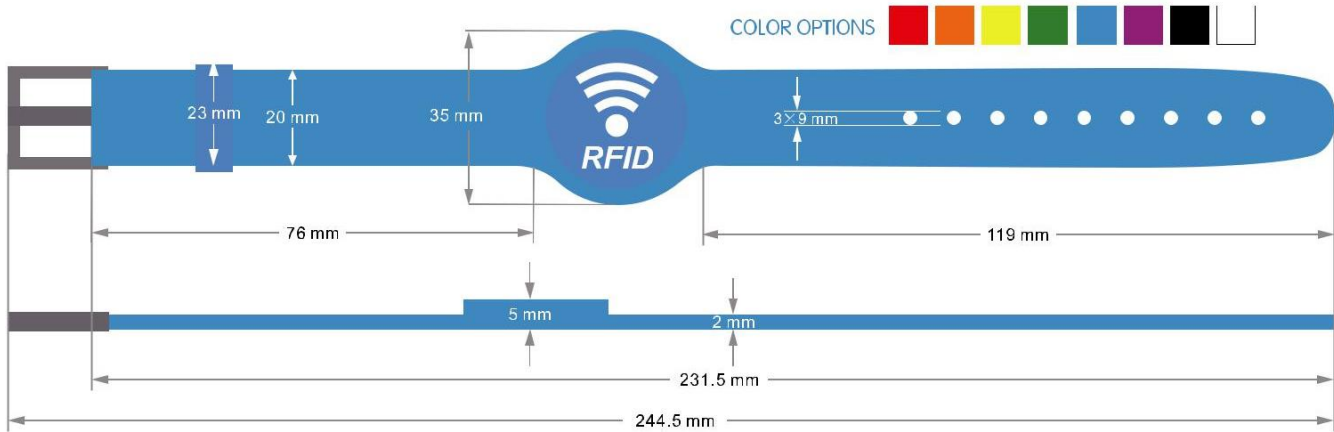

CHIPS OPTION:

LF, Low Frequency (125 KHz):
TK4100, EM4200, EM4305, T5577 etc

HF, High Frequency (13.56 MHz):
Mifare S50, Mifare S70, FM11RF08, NTAG213, NTAG216, Plus S(X), Ultralight EV1, I-CODE SLi, Ti etc

UHF, Ultra High Frequency (860–960 MHz):
Alien H3, H4, H5, Monza3, 4, 5, U-CODE etc

OPERATING TEMPERATURE: -30–220°C

NOTES:

- 1、 Waterproof
- 2、 Environmentally Friendly
- 3、 Customized Totally

CRAFTS:

LOGO Printing, 4C Printing, LOGO or Text Embossed, Text Debossed With Colors, UID Laser Numbering, Changeable QR etc


IN-KIND-SHOOTING:



CUSTOMIZATION:

Shapes, Crafts, Belonging to Clients Totally, Protected by CDA.

MODEL: ID - C02

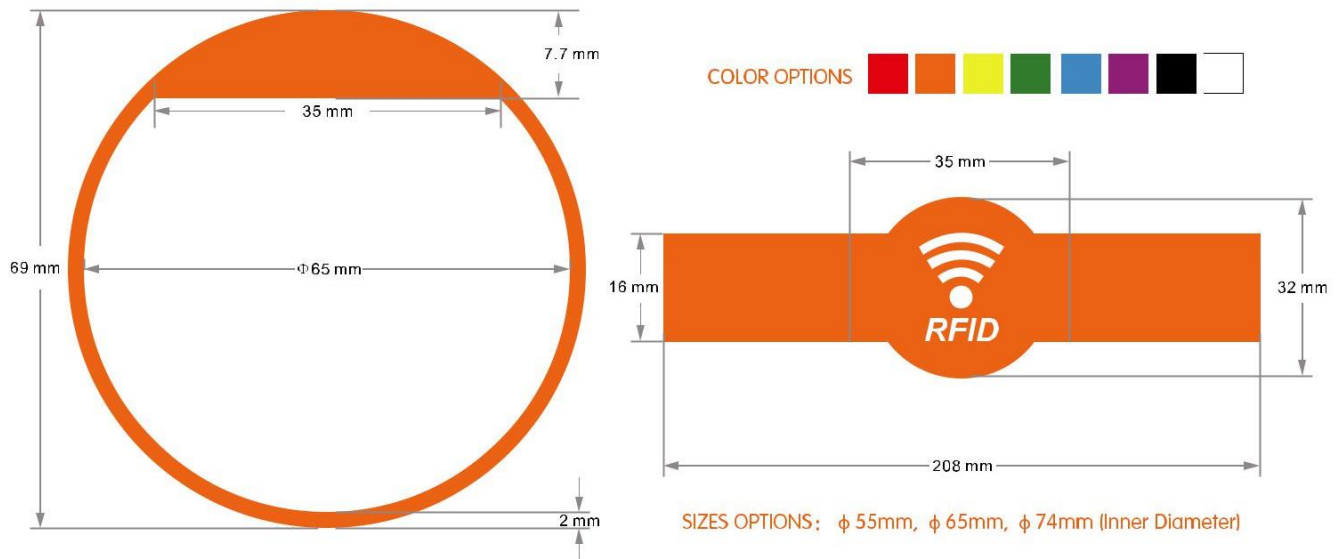

CHIPS OPTION:

LF, Low Frequency (125 KHz):
TK4100, EM4200, EM4305, T5577 etc

HF, High Frequency (13.56 MHz):
Mifare S50, Mifare S70, FM11RF08, NTAG213, NTAG216, Plus S(X), Ultralight EV1, I-CODE SLi, Ti etc

UHF, Ultra High Frequency (860–960 MHz):
Alien H3, H4, H5, Monza3, 4, 5, U-CODE etc

OPERATING TEMPERATURE: -30–220°C


NOTES:

- 1、 Waterproof
- 2、 Environmentally Friendly
- 3、 Customized Totally

CRAFTS:

LOGO Printing, 4C Printing, LOGO or Text Embossed, Text Debossed With Colors, UID Laser Numbering, Changeable QR etc


IN-KIND-SHOOTING:

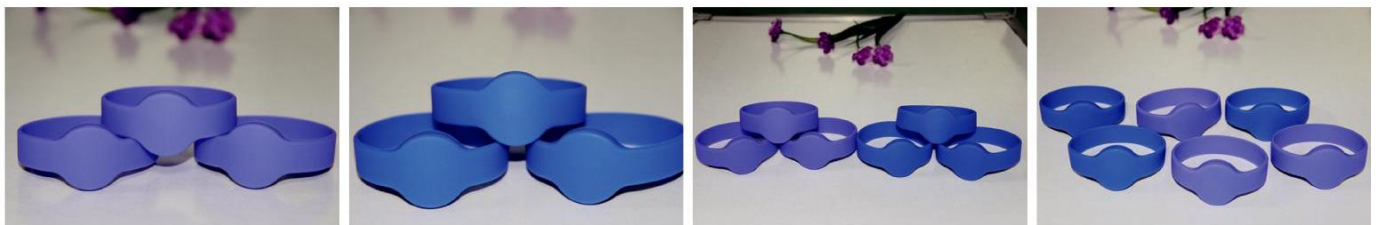

CUSTOMIZATION:

Shapes, Crafts, Belonging to Clients Totally, Protected by CDA.

MODEL: ID - C03

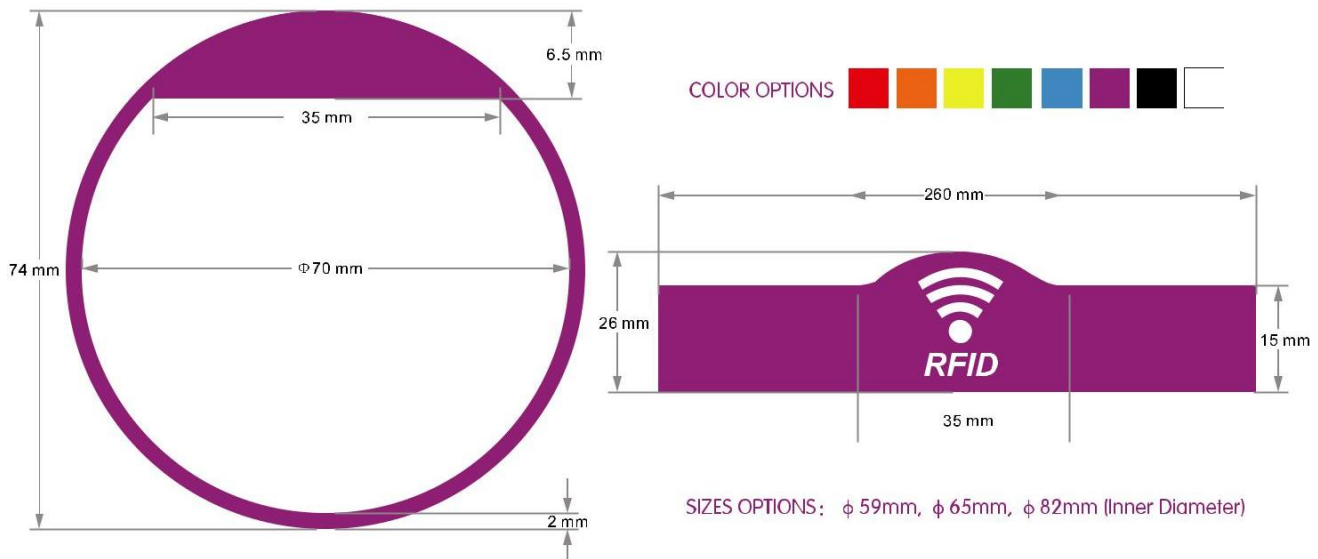

CHIPS OPTION:

LF, Low Frequency (125 KHz):
TK4100, EM4200, EM4305, T5577 etc

HF, High Frequency (13.56 MHz):
Mifare S50, Mifare S70, FM11RF08, NTAG213, NTAG216, Plus S(X), Ultralight EV1, I-CODE SLi, Ti etc

UHF, Ultra High Frequency (860–960 MHz):
Alien H3, H4, H5, Monza3, 4, 5, U-CODE etc

OPERATING TEMPERATURE: -30–220°C


NOTES:

- 1、 Waterproof
- 2、 Environmentally Friendly
- 3、 Customized Totally

CRAFTS:

LOGO Printing、 4C Printing, LOGO or Text Embossed, Text Debossed With Colors, UID Laser Numbering, Changeable QR etc


IN-KIND-SHOOTING:

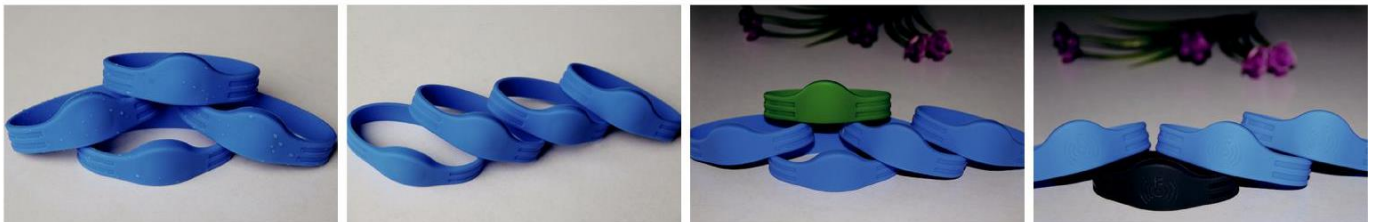

CUSTOMIZATION:

Shapes, Crafts, Belonging to Clients Totally, Protected by CDA.

MODEL: ID - C04

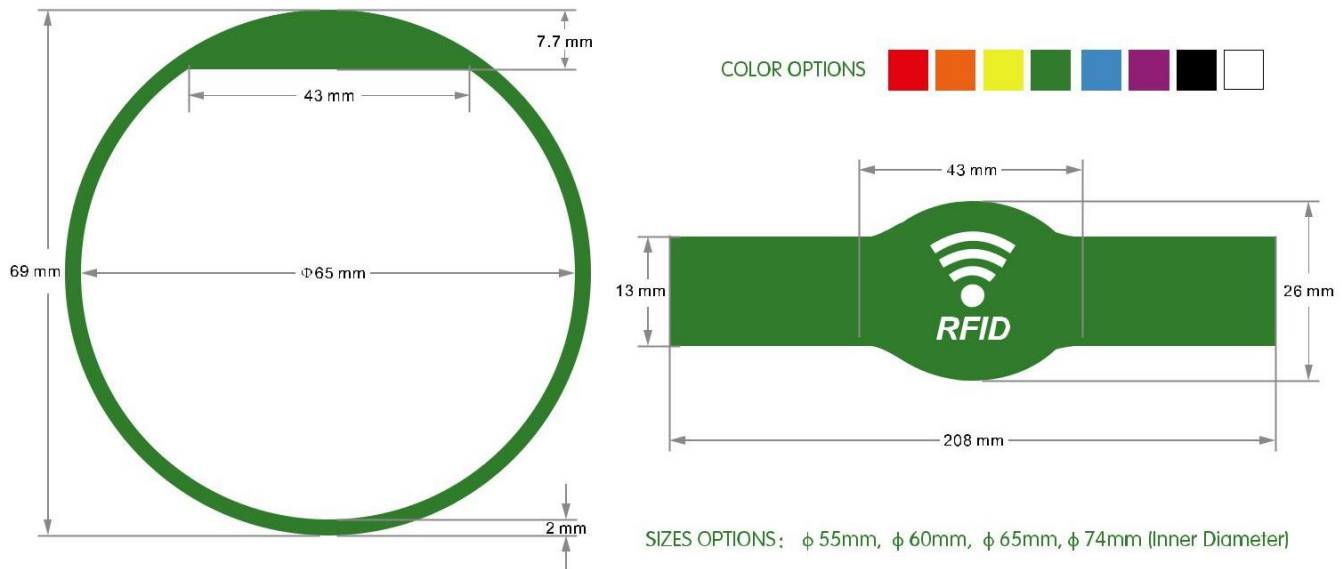

CHIPS OPTION:

LF, Low Frequency (125 KHz):
TK4100, EM4200, EM4305, T5577 etc

HF, High Frequency (13.56 MHz):
Mifare S50, Mifare S70, FM11RF08, NTAG213, NTAG216, Plus S(X), Ultralight EV1, I-CODE SLi, Ti etc

UHF, Ultra High Frequency (860–960 MHz):
Alien H3, H4, H5, Monza3, 4, 5, U-CODE etc

OPERATING TEMPERATURE: $-30-220^{\circ}\text{C}$

NOTES:

- 1、 Waterproof
- 2、 Environmentally Friendly
- 3、 Customized Totally

CRAFTS:

LOGO Printing, 4C Printing, LOGO or Text Embossed, Text Debossed With Colors, UID Laser Numbering, Changeable QR etc


IN-KIND-SHOOTING:



CUSTOMIZATION:

Shapes, Crafts, Belonging to Clients Totally, Protected by CDA.

MODEL: ID - C05

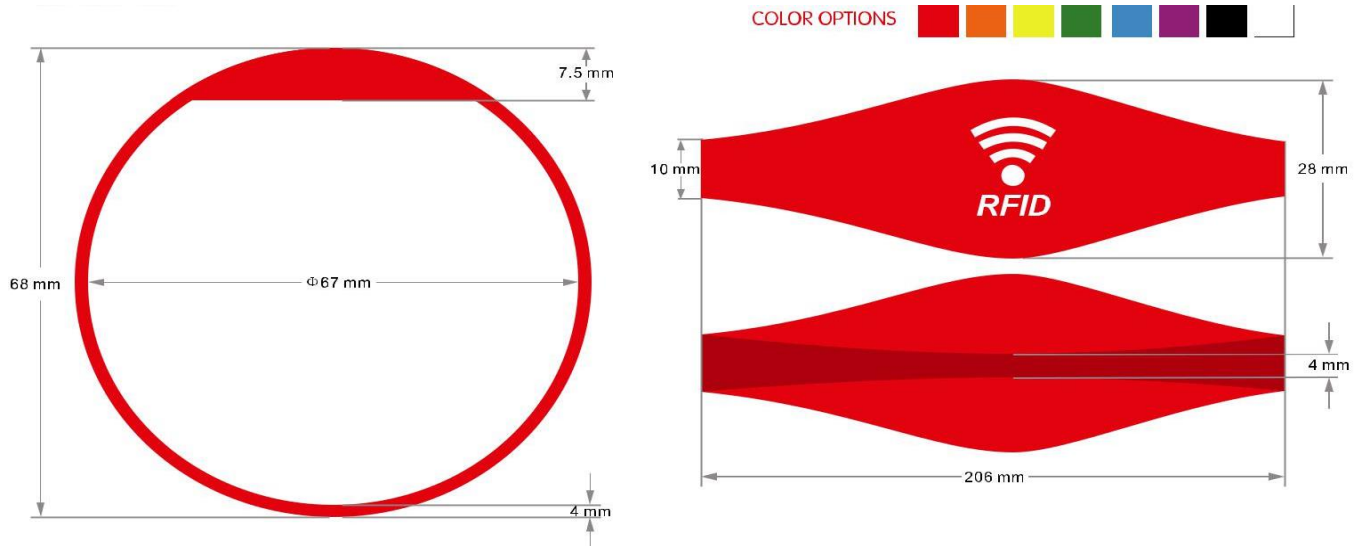

CHIPS OPTION:

LF, Low Frequency (125 KHz):
TK4100, EM4200, EM4305, T5577 etc

HF, Hight Frequency (13.56 MHz):
Mifare S50, Mifare S70, FM11RF08, NTAG213, NTAG216, Plus S(X), Ultralight EV1, I-CODE SLi, Ti etc

UHF, Ultra High Frequency (860–960 MHz):
Alien H3,H4,H5, Monza3,4,5, U-CODE etc

OPERATING TEMPERATURE: -30–220°C


NOTES:

- 1、 Waterproof
- 2、 Environmentally Friendly
- 3、 Customized Totally

CRAFTS:

LOGO Printing、 4C Printing, LOGO or Text Embossed, Text Debossed With Colors, UID Laser Numbering, Changeable QR etc

IN-KIND-SHOOTING:

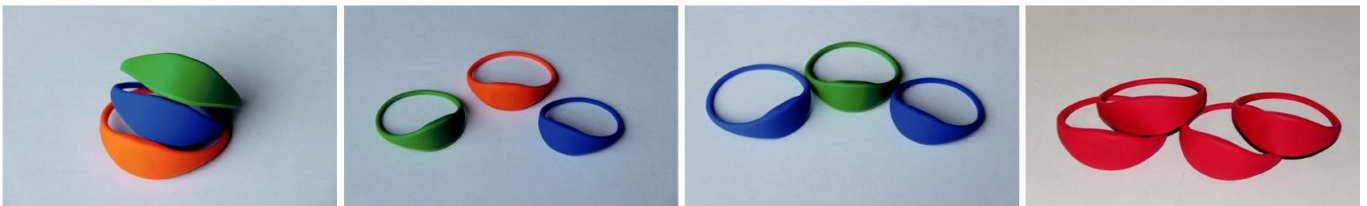


CUSTOMIZATION:

Shapes, Crafts, Belonging to Clients Totally, Protected by CDA.

MODEL: ID - C06

COLOR OPTIONS

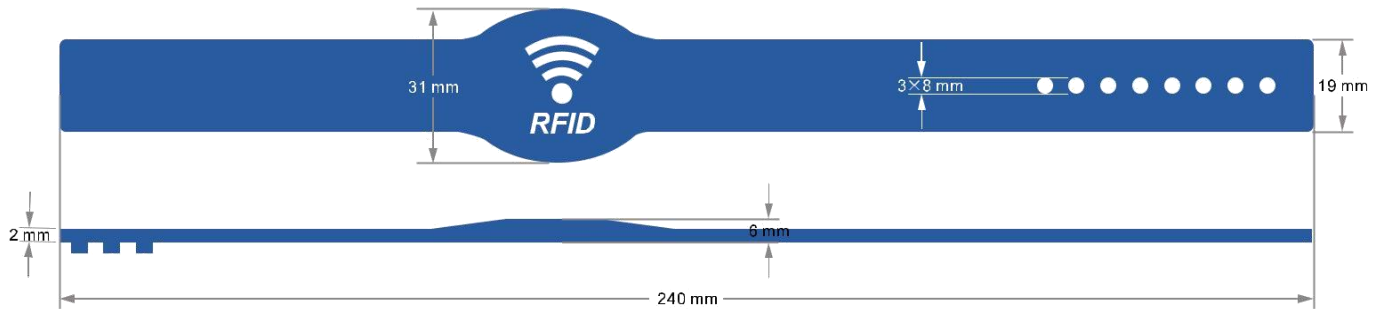

CHIPS OPTION:

LF, Low Frequency (125 KHz):
TK4100, EM4200, EM4305, T5577 etc

HF, High Frequency (13.56 MHz):
Mifare S50, Mifare S70, FM11RF08, NTAG213, NTAG216, Plus S(X), Ultralight EV1, I-CODE SLi, Ti etc

UHF, Ultra High Frequency (860–960 MHz):
Alien H3, H4, H5, Monza3, 4, 5, U-CODE etc

OPERATING TEMPERATURE: -30–220°C


NOTES:

- 1、 Waterproof
- 2、 Environmentally Friendly
- 3、 Customized Totally

CRAFTS:

LOGO Printing, 4C Printing, LOGO or Text Embossed, Text Debossed With Colors, UID Laser Numbering, Changeable QR etc


IN-KIND-SHOOTING:

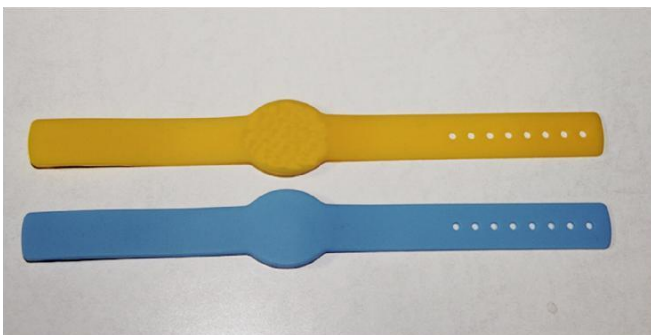

CUSTOMIZATION:

Shapes, Crafts, Belonging to Clients Totally, Protected by CDA.

MODEL: ID - C07

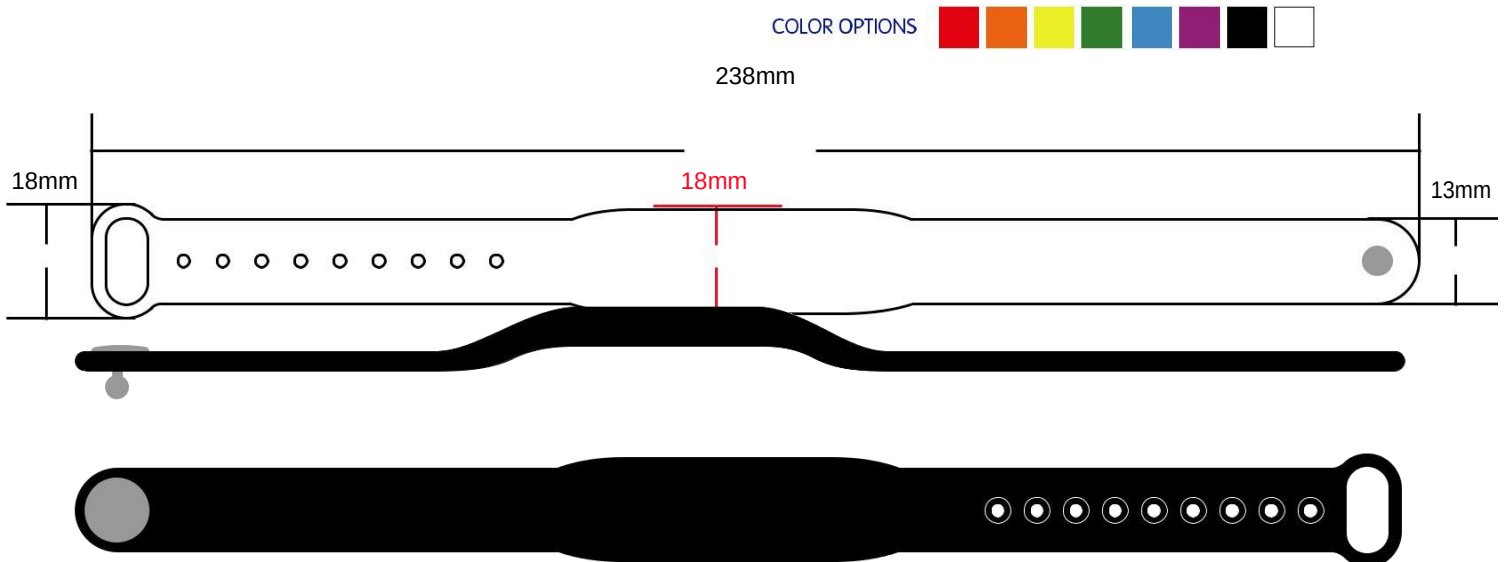

CHIPS OPTION:

HF, High Frequency (13.56 MHz):

Mifare S50, Mifare S70, FM11RF08, NTAG213, NTAG216, Plus S(X), Ultralight EV1, I-CODE SLi, Ti etc

UHF, Ultra High Frequency (860–960 MHz):

Alien H3, H4, H5, Monza3, 4, 5, U-CODE etc

OPERATING TEMPERATURE: -30–220°C

NOTES:

- 1、 Waterproof
- 2、 Environmentally Friendly
- 3、 Customized Totally

CRAFTS:


LOGO Printing、 4C Printing, LOGO or Text Embossed, Text Debossed With Colors, UID Laser Numbering, Changeable QR etc

IN-KIND-SHOOTING:



MODEL: ID - C08

COLOR OPTIONS

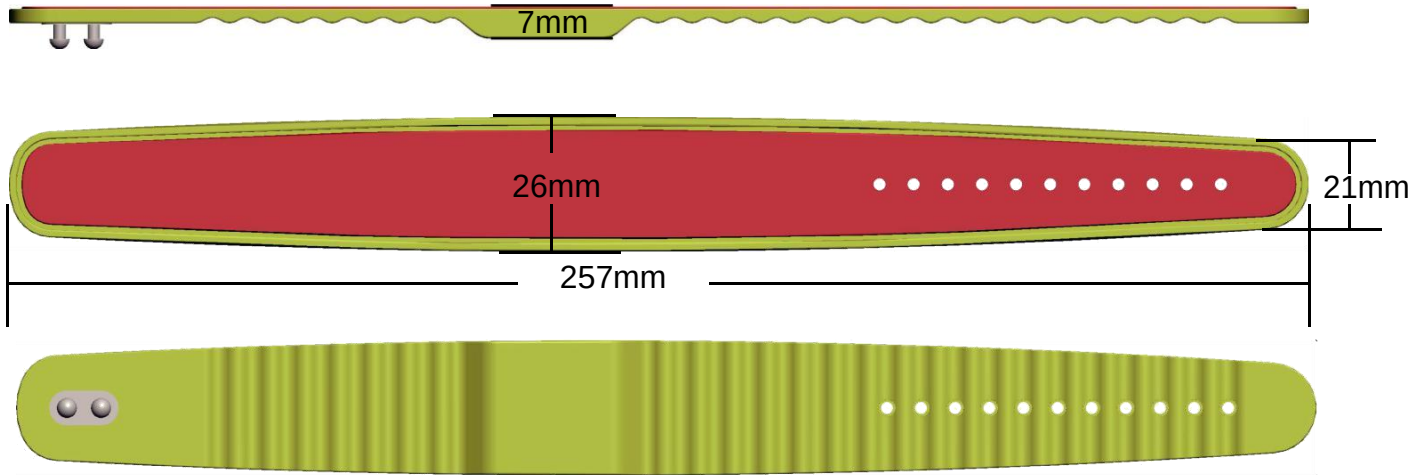

CHIPS OPTION:

HF, High Frequency (13.56 MHz):

Mifare S50, Mifare S70, FM11RF08, NTAG213, NTAG216, Plus S(X), Ultralight EV1, I-CODE SLi, Ti etc

UHF, Ultra High Frequency (860–960 MHz):

Allen H3,H4,H5, Monza3,4,5, U-CODE etc

OPERATING TEMPERATURE: -30–220°C

NOTES:

- 1、 Waterproof
- 2、 Environmentally Friendly
- 3、 Customized Totally

CRAFTS:


LOGO Printing、 4C Printing、 LOGO or Text Embossed、 Text Debossed With Colors、 UID Laser Numbering、 Changeable QR etc

IN-KIND-SHOOTING:



MODEL: ID - C09

COLOR OPTIONS

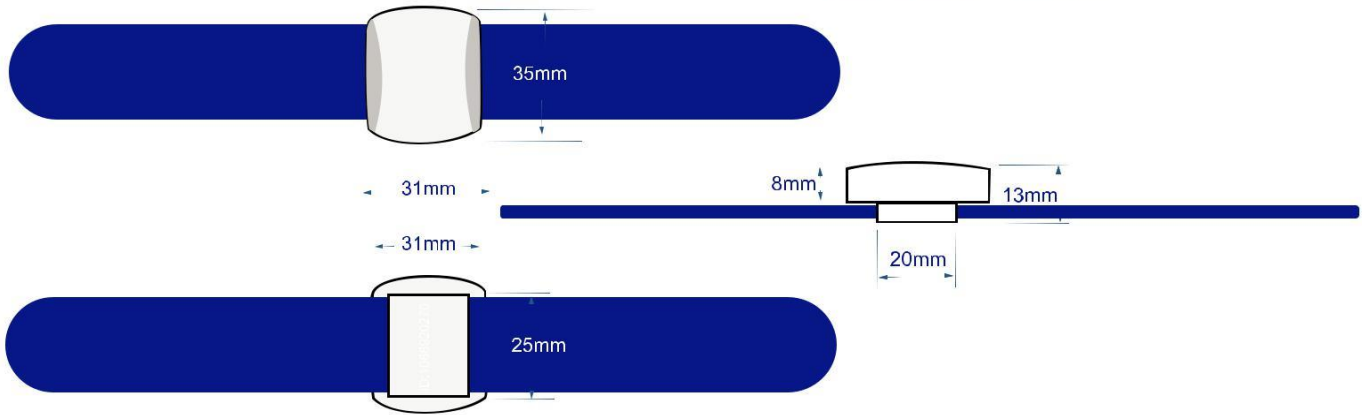

CHIPS OPTION:

UHF, Ultra High Frequency (860–960 MHz):
Alien H3,H4,H5, Monza3,4,5, U-CODE etc

READING RANGE: **Up to 7.6 meters**

OPERATING TEMPERATURE: –30–220°C


NOTES:

- 1、 Waterproof
- 2、 Environmentally Friendly
- 3、 Customized Totally

CRAFTS:

LOGO Printing, Silk Printing, UID Laser Numbering etc

IN-KIND-SHOOTING:

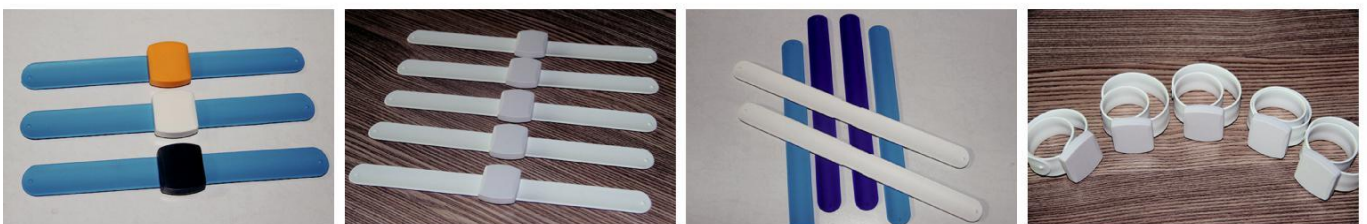


CUSTOMIZATION:

Shapes, Crafts, Belonging to Clients Totally, Protected by CDA.

MODEL: ID - C10

COLOR OPTIONS

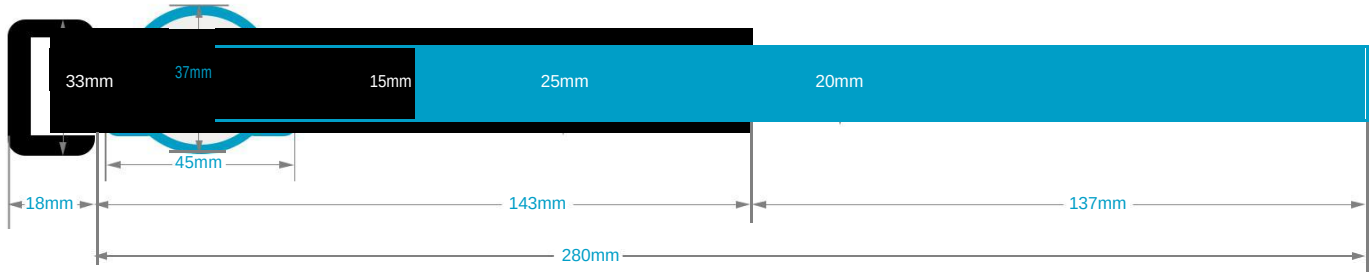

CHIPS OPTION:

LF, Low Frequency (125 KHz):
TK4100, EM4200, EM4305, T5577 etc

HF, High Frequency (13.56 MHz):
Mifare S50, Mifare S70, FM11RF08, NTAG213, NTAG216, Plus S(X), Ultralight EV1, I-CODE SLi, Ti etc

UHF, Ultra High Frequency (860–960 MHz):
Alien H3, H4, H5, Monza3, 4, 5, U-CODE etc

OPERATING TEMPERATURE: -30–220°C

NOTES:

- 1、 Waterproof
- 2、 Environmentally Friendly
- 3、 Customized Totally

CRAFTS:


LOGO Printing, 4C Printing, LOGO or Text Embossed, Text Debossed With Colors, UID Laser Numbering, Changeable QR etc

IN-KIND-SHOOTING:




CUSTOMIZATION:

Shapes, Crafts, Belonging to Clients Totally, Protected by CDA.

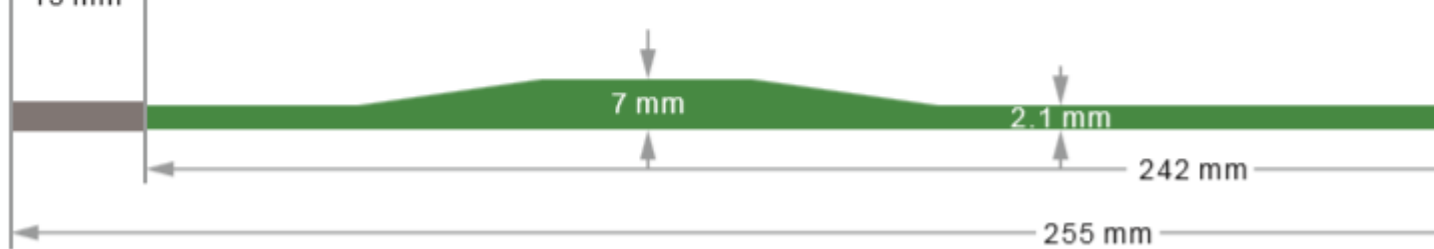

COLOR OPTIONS

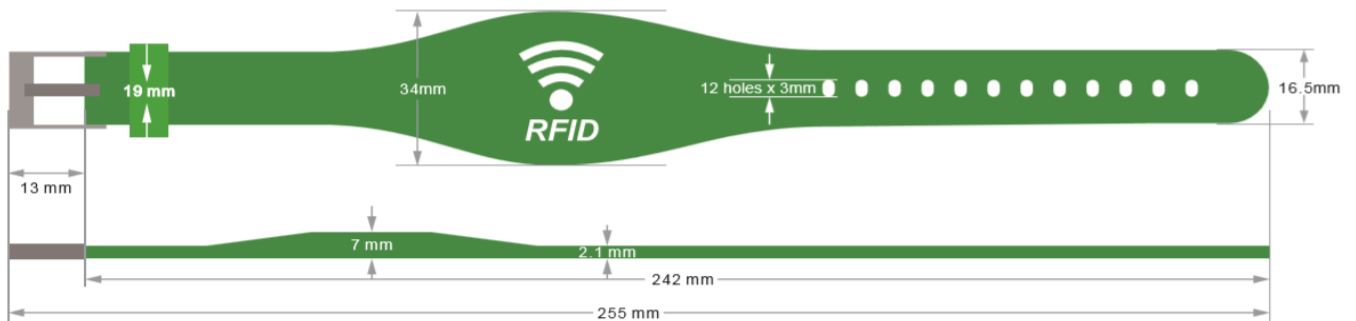

CHIPS OPTION:

LF, Low Frequency (125 KHz):
TK4100, EM4200, EM4305, T5577 etc

HF, High Frequency (13.56 MHz):
Mifare S50, Mifare S70, FM11RF08, NTAG213, NTAG216, Plus S(X), Ultralight EV1, I-CODE SLI, Ti etc

UHF, Ultra High Frequency (860–960 MHz):
Alien H3,H4,H5, Monza3,4,5, U-CODE etc

OPERATING TEMPERATURE: –30–220°C

NOTES:

- 1、 Waterproof
- 2、 Environmentally Friendly
- 3、 Customized Totally

CRAFTS:

LOGO Printing、 4C Printing、 LOGO or Text Embossed、 Text Debossed With Colors、 UID Laser Numbering、 Changeable QR etc

IN-KIND-SHOOTING:



CUSTOMIZATION:

Shapes、 Crafts、 Belonging to Clients Totally、 Protected by CDA.

Disposable Wristbands

MODEL: ID – P01

IDentium RFID PVC Wristband IDTS-TRPW(L/H/U)



Introduction:

Identium Tamper-proof RFID PVC wristband is a multipurpose Wristband having excellent read performance which makes it useful in various applications including Revenue & Crowd control in Amusement & Leisure centres, Patient Identification, etc

Features :

- Dust & water proof
- Tamper-proof
- Soft and non-allergic
- Disposable
- Custom Printing with barcodes, QR codes & Variable Datasets
- Available in different Sizes
- Can be Pre-encoded on request
- Chip can be customised on request
- Available in HF & UHF

Application:

- Access Control
- Cashless Payments
- Patient Identification
- Event Social Media Integration
- Race Timing

Specifications:

Model No	IDTS – TRPW(L/H/U)
Chip Specifications	
Available Chips	Alien Higgs 3(860-960 MHz, 512 bit, R/W, EPC Gen2 ISO 18000-6) NXP Ntag 203/213(13.56 MHz, 144 bit, R/W, ISO 1443 A) I-Code (13.56 MHz, 512 bit, R/W, ISO 15693) Mifare UL (13.56 MHz, 512 Bit, R/W, ISO 14443 A) Mifare 1 S50 (13.56 MHz, 1K Byte, R/W, ISO 14443 A)
Material	PVC with Button/Adhesive Closure
Operating Mode	Passive
Colors	Blue, Red, Green, Yellow, Orange, White(others on request)
Packaging	250 wristbands per roll, Custom packaging also available
Customization	Variable Barcodes, Qr Codes, Datasets, logo, text
Operating Temperature	-25 °C to +60 °C
Storage Temperature	-25 °C to +60 °C

MODEL: ID – P02

IDentium RFID PVC Wristband IDTS-RPW(L/H/U)



Introduction:

IDentium RFID PVC wristband is a multipurpose Wristband having excellent read performance which makes it useful in various applications including Revenue & Crowd control in Amusement & Leisure centres, Patient Identification, etc

Features :

- Dust & water proof
- Soft and non-allergic
- Disposable
- Custom Printing with barcodes, QR codes & Variable Datasets
- Available in different Sizes
- Can be Pre-encoded on request
- Chip can be customised on request
- Available in HF & UHF

Application:

- Access Control
- Cashless Payments
- Patient Identification
- Event Social Media Integration
- Race Timing

Specifications:

Model No	IDTS – RPW(L/H/U)
Chip Specifications	
Available Chips	Alien Higgs 3(860-960 MHz, 512 bit, R/W, EPC Gen2 ISO 18000-6) NXP Ntag 203/213(13.56 MHz, 144 bit, R/W, ISO 1443 A) I-Code (13.56 MHz, 512 bit, R/W, ISO 15693) Mifare UL (13.56 MHz, 512 Bit, R/W, ISO 14443 A) Mifare 1 S50 (13.56 MHz, 1K Byte, R/W, ISO 14443 A)
Material	PVC with Button/Adhesive Closure
Operating Mode	Passive
Dimensions	210(l) x 30mm(w) x 1mm (t)
Colors	All colors available
Packaging	Custom packaging
Customization	Variable Barcodes, Qr Codes, Datasets, logo, text
Operating Temperature	-25 °C to +60 °C
Storage Temperature	-25 °C to +60 °C

MODEL: ID – P03

IDentium RFID TyVek Wristband IDTS-RTPW(L/H/U)



Introduction:

Identium RFID TyVek wristband is a multipurpose Tamper-proof Wristband having excellent read performance which makes it useful in various applications including Revenue & Crowd control in Amusement & Leisure centres, Patient Identification, etc

The Wristband is designed for Tamper-proof Applications and will tear off once removed.

Features :

- Soft and non-allergic
- Disposable
- Single Color Printing
- Available in different Sizes
- Can be Pre-encoded on request
- Chip can be customised on request
- Available in HF & UHF

Application:

- Access Control
- Cashless Payments
- Patient Identification
- Event Social Media Integration
- Race Timing

Specifications:

Model No	IDTS – RTPW(L/H/U)
Chip Specifications	
Available Chips	Alien Higgs 3(860-960 MHz, 512 bit, R/W, EPC Gen2 ISO 18000-6) NXP Ntag 203/213(13.56 MHz, 144 bit, R/W, ISO 1443 A) I-Code (13.56 MHz, 512 bit, R/W, ISO 15693) Mifare UL (13.56 MHz, 512 Bit, R/W, ISO 14443 A) Mifare 1 S50 (13.56 MHz, 1K Byte, R/W, ISO 14443 A)
Material	Tyvek
Operating Mode	Passive
Dimensions	210(l) x 25mm(w) x 1mm (t)
Colors	All colors available
Packaging	Custom packaging
Customization	Variable Barcodes, Qr Codes, Datasets, logo, text
Operating Temperature	-25 °C to +60 °C
Storage Temperature	-25 °C to +60 °C

MODEL: ID – P04

IDentium Fabric Wristband tag IDTS-RFW(L/H/U)



Introduction:

Identium RFID Fabric wristband is a multipurpose Wristband having excellent read performance which makes it useful in various applications including Revenue & Crowd control in Amusement & Leisure centres, Access Control in Gyms & spas, RFID Lockers, Patient Identification, etc

Features :

- Dust & water proof
- Soft and non-allergic
- Available in different Sizes
- Can be Pre-encoded on request
- Chip can be customised on request
- Available in LF, HF & UHF

Application:

- Access Control
- Cashless Payments
- Patient Identification
- Event Social Media Integration
- Race Timing
- RFID Lockers in Gyms & Spas

Specifications:

Model No	IDTS – RFW(U/H/L)
Chip Specifications	
Available Chips	Alien Higgs 3(860-960 MHz, 512 bit, R/W, EPC Gen2 ISO 18000-6) NXP Ntag 203/213(13.56 MHz, 144 bit, R/W, ISO 1443 A) I-Code (13.56 MHz, 512 bit, R/W, ISO 15693) Mifare UL (13.56 MHz, 512 Bit, R/W, ISO 14443 A) Mifare 1 S50 (13.56 MHz, 1K Byte, R/W, ISO 14443 A)
Material	Polyester, woven, Nylon for band
Operating Mode	Passive
Dimensions	RFID Card: 40*25mm , 35*26mm Length of the band: 350*15mm
Customization/Colors	RFID PVC Card: 4C Offset Printing or Digital Print. String: Heat Transfer printing.
Operating Temperature	-25 °C to +60 °C
Storage Temperature	-25 °C to +60 °C

Queries/Samples?

Call us: +91 7827944632
+91 7011001472

Write to us: info@identium.in

RFID: IDentium.in