
Openterface KVM-GO
Datasheet

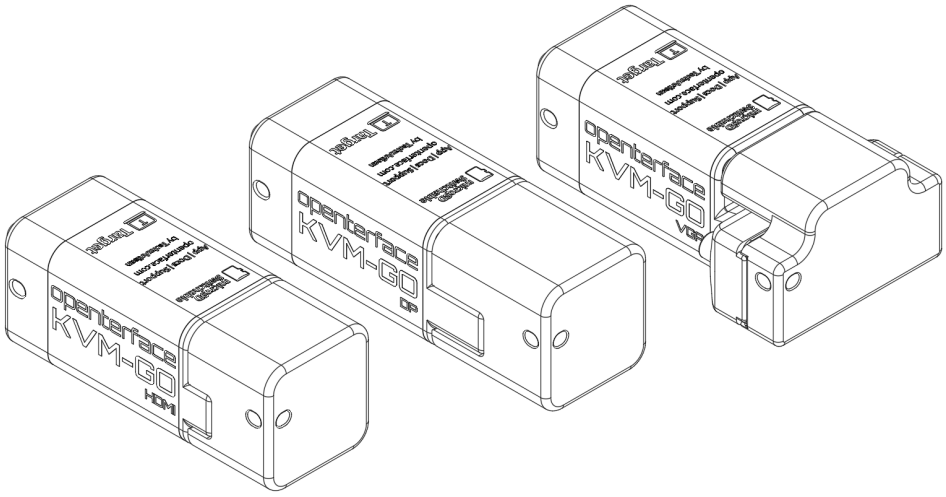

Overview

Openterface™ KVM-GO is an ultra-compact, production-grade, open-source, and community-driven device. It offers a lightweight and speedy KVM-over-USB solution, enabling you to control a headless computer (referred to as the Target computer) directly from your laptop, tablet, or smartphone (referred to as the Host device), via a simple direct USB connection.

With built-in video connectors, KVM-GO eliminates the need for separate video cables while also removing the need for additional keyboards, mice, monitors, or any network configuration. This compact approach simplifies your setup and enhances efficiency for field operations, headless troubleshooting, BIOS-level access, and quick local control.

The KVM-GO series includes three hardware variants:

- KVM-GO HDMI Male
- KVM-GO DisplayPort Male
- KVM-GO VGA Male


All models share the same ultra-compact design and core functionality, with the only difference being the built-in video connector.

Specifications

Parameter name	Characteristics
Product Name	Openterface KVM-GO
Manufacturer	TechxArtisan Limited
Product Name / Model / Contents	
KVM-GO HDMI Basic (392-OPKVMGOBUNDLEKIT) Contents: Openterface KVM-GO HDMI Quick Start Guide	
KVM-GO DP Basic (392-OPKVMGOBUNDLEKIT) Contents: Openterface KVM-GO DP Quick Start Guide	
KVM-GO VGA Basic (392-OPKVMGOBUNDLEKIT) Contents: Openterface KVM-GO VGA Quick Start Guide	

KVM-GO Toolkit (392-OPKVMGOBUNDLEKIT) Contents: 1. Openterface KVM-GO 2. Quick Start Guide 3. Toolkit Bag 4. 3D-Printed Cap with MicroSD storage 5. 0.5m black Type-C to USB-A cable with Type-C adapter 6. 2.5m orange Type-C to Type-C cable with USB-A adapter 7. 3/32 Ball End L-shaped Hex Wrench	
Power	
Connection Type	USB-C powered. No external power supply required
Video	
HDMI Max Video Input	4096 × 2160 @ 60 Hz (YUV420), 4096 × 2160 @ 30 Hz (YUV444)
DP Max Video Input	1920 x 1200 @ 120Hz WUXGA, 2560 x 1600 @ 120Hz WQXGA, 1920 x 1080 @ 240Hz FHD, 4K x 2K @ 60Hz CEA
VGA Max Video Input	4096 × 2160 @ 60 Hz (YCBCR420), 4096 × 2160 @ 30 Hz (RGB444,YCBCR444)
HDMI Supported Video Resolutions	Up to 4096×2160 @ 60 Hz (MJPEG), 3840 × 2160 @ 30 Hz (YUV420)
DP Supported Video Resolutions	
VGA Supported Video Resolutions	1920 x 1080 @ 60Hz
Video Compression Methods	RGB444,YCBCR444, YCBCR422,YCBCR420
Default Mode	1920 x 1080p @ 60 Hz for optimal stability and performance

4K Mode	Available as an experimental feature. Extended use in 4K mode may generate additional heat
Audio	
HDMI and DP Audio Capture Mode	96kHz/24bit stereo output, 5.1 channel mode, HD RX 5.1/7.1 channel audio capture
VGA Audio Capture Mode	Audio capture not supported
Environmental	
Operating Temperature	0°C to 40°C
Storage Temperature	-10°C to 50°C
Humidity	80% RH

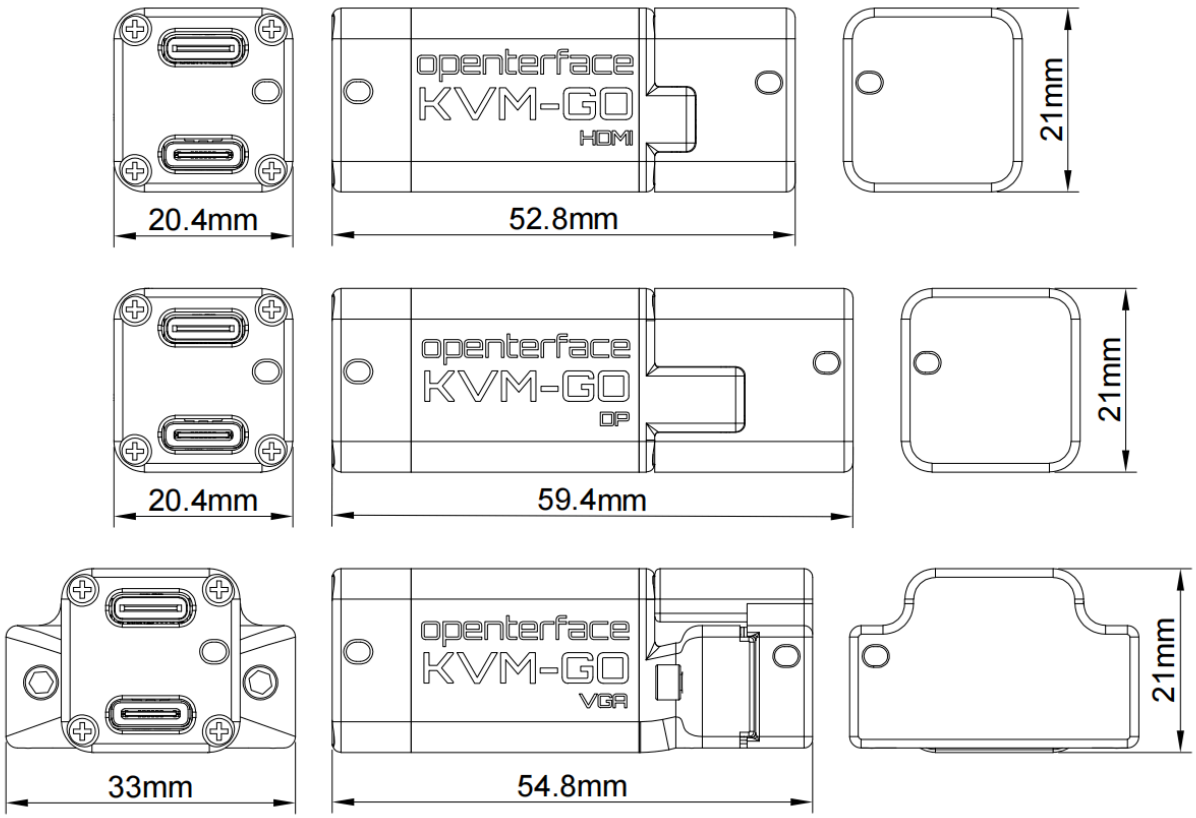


Size and Weight	
KVM-GO-HDMI Length x Width x Height	52.8 × 20.4 × 21 mm
KVM-GO-DP Length x Width x Height	59.4 × 20.4 × 21 mm
KVM-GO-VGA Length x Width x Height	54.8 × 33 × 21 mm
KVM-GO-HDMI Weight	~30 g
KVM-GO-DP Weight	~35 g
KVM-GO-VGA Weight	~35 g

Accessories for Toolkit

Item / Model Number / Description	Image
Type-C to USB-A Cable with Adapter Model: OP-04-CABLE30-C2A Length: 0.3m / ~12" Colour: Black Adapter: USB-A Female to USB-C Male Use: Data transfer / KVM control	
Nylon Type-C Cable with Adapter Model: OP-05-CABLE150-C2C Length: 1.5m / 4' 11" Colour: Orange Adapter: USB-C to USB-A Data Transfer: Up to 10Gbps Charging Power: 240W	

Connections

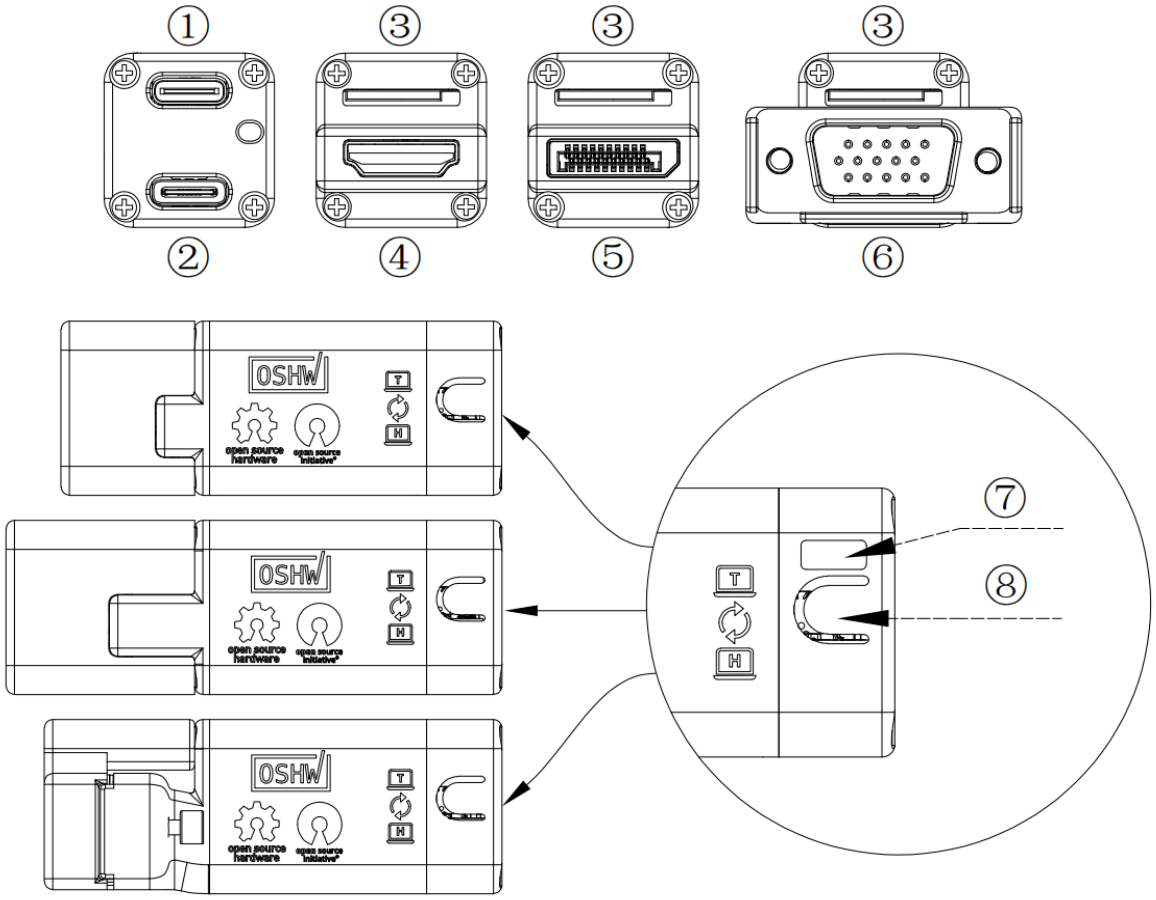

Connectivity / Interfaces	
①Target (Female)	Connects to the target computer for USB keyboard and mouse emulation
② Host (Female)	Connects to the host device, such as a laptop, tablet, or smartphone, for video display and control
③ SD Card	MicroSD card slot for storage switching and file transfer between the host and the target device
④ HDMI	Built-in HDMI connector for video input from the target computer

Connectivity / Interfaces	
⑤ DP	Built-in DisplayPort connector for video input from the target computer
⑥ VGA	Built-in VGA connector for video input from the target computer
⑦ RGB Indicator	RGB status indicator for showing device working state
⑧ Button	Function button for switching or control operations

Applications

Openterface KVM-GO is the perfect companion for a wide range of users and scenarios::

- IT professionals troubleshooting servers in the field
- Technicians servicing kiosks, industrial equipment, and legacy systems
- Developers managing embedded devices and single-board computers
- Homelab users needing fast BIOS-level access without network dependency
- Professionals working in secure or isolated environments where network-based KVM is not suitable
- Anyone who needs a portable crash-cart style tool for rapid local console access

Softwares for the Host Computer

To get this device up and running on **macOS, Windows, Linux, or Android**, install one of our available apps from the relevant app platforms or build from source using our GitHub repositories.

System requirement

Host	Mac OS	Windows	Linux
System version	macOS Monterey (12.0) or higher	Windows 10 or higher	Ubuntu 20.04 or higher
CPU	Intel or Apple Silicon	x86_64 (Intel, AMD, etc.)	x86_64 or ARM64 (Intel, AMD, raspberrypi, etc.)
GPU accelerate support	Metal-capable GPUs (all modern Macs)	NVIDIA or Intel Arc/Iris Xe need driver	NVIDIA or Intel need driver raspberrypi gpu
Memory	8G or higher		
Hard disk	128G or higher		

Target	Item	Requirement
	System version	No software installation required
	Video output	Required
	USB port	Required
	HID support	Standard USB keyboard and mouse input
	BIOS / UEFI	Supported

Open Source & Compliances

Openterface apps are **AGPL-3.0** licensed, with active development by TechxArtisan. The device is **OSHWA-certified** , ensuring open access to all schematics and source code on GitHub: Openterface_KVM-GO_Hardware.

Stay Updated

Visit openterface.com and join our Discord community to stay informed, get support, and collaborate with other users.