


Jun.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.


HRS DRAWING FOR REFERENCE

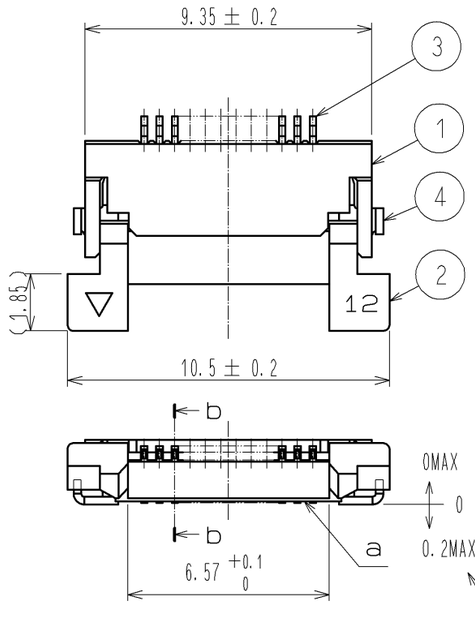




RECOMMENDED FPC, FFC(FREE)

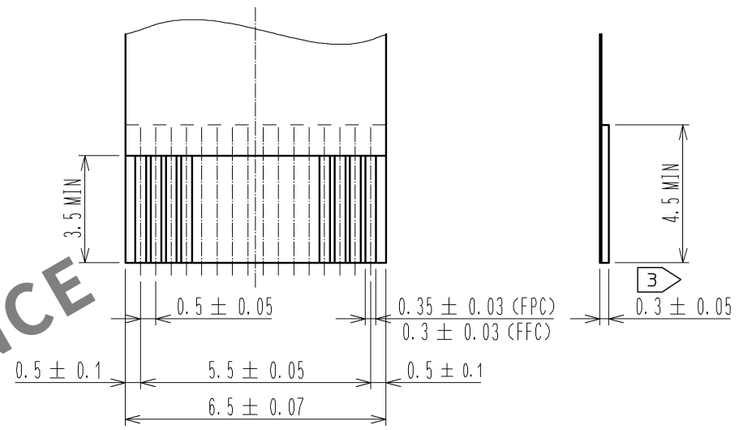

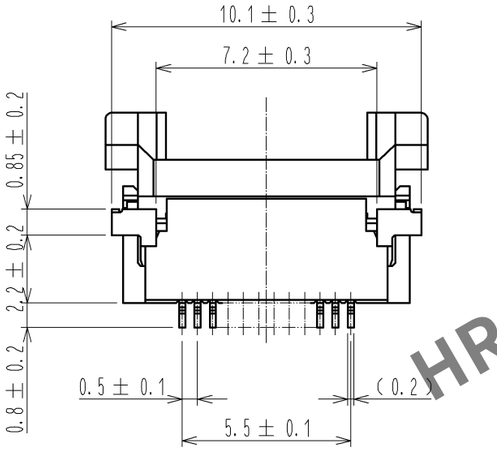


RECOMMENDED LAND PATTERN, METAL MASK(FREE)

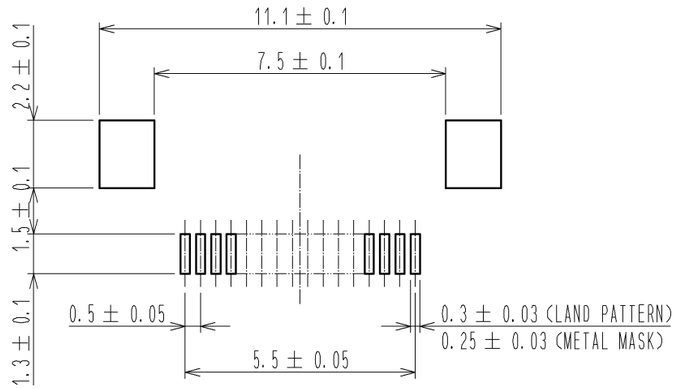

RECOMMENDED METAL MASK THICKNESS t=0.15

b-b (10 : 1)

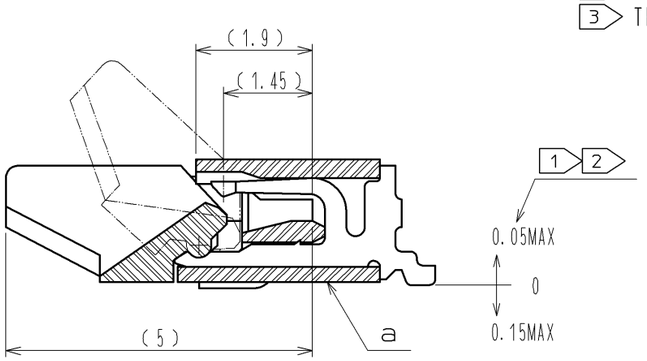

NOTE
1. REFERENCE IS a.
2. LEAD CO-PLANARITY SHALL BE 0.1 MAX.
3. THICKNESS OF SUPPORTING TAPE SHALL BE 0.188(7.5mil) MIN.

NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS
4	BRASS	TIN PLATING 1㎛MIN OVER NICKEL 1㎛MIN.	8	(CONNECTOR)	
3	PHOSPHOR BRONZE	GOLD PLATING 0.05㎛MIN OVER NICKEL 1㎛MIN.	7	POLYSTYRENE	
2	PPS	DEEP BROWN UL94V-0	6	POLYESTER	
1	POLYAMIDE	BEIGE UL94V-0	5	POLYSTYRENE	

UNITS	SCALE		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	5 : 1	⚠1	1	DIS-F-003410	MK. YASUMI	FN. TAMURA	09.12.11


HIROSE ELECTRIC CO., LTD.


APPROVED	RI. TAKAYASU	08.09.02
CHECED	HS. SAKAMOTO	08.09.01
DESIGNED	MK. YASUMI	08.08.26
DRAWN	MK. YASUMI	08.08.26

DRAWING NO.	EDC3-152957-51
PART NO.	FH12A-12S-0.5SH(55)
CODE NO.	CL586-0696-4-55 ⚠1 1/2


Jun.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

EMBOSSED CARRIER TAPE DIMENSION(2:1)

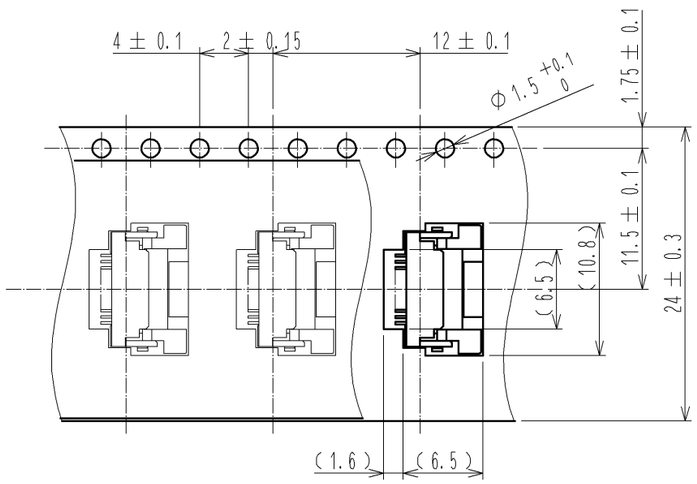


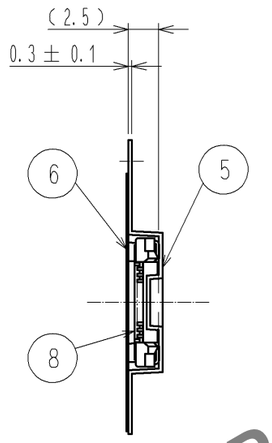


DIRECTION OF UNREELING



REEL DIMENSION(FREE)

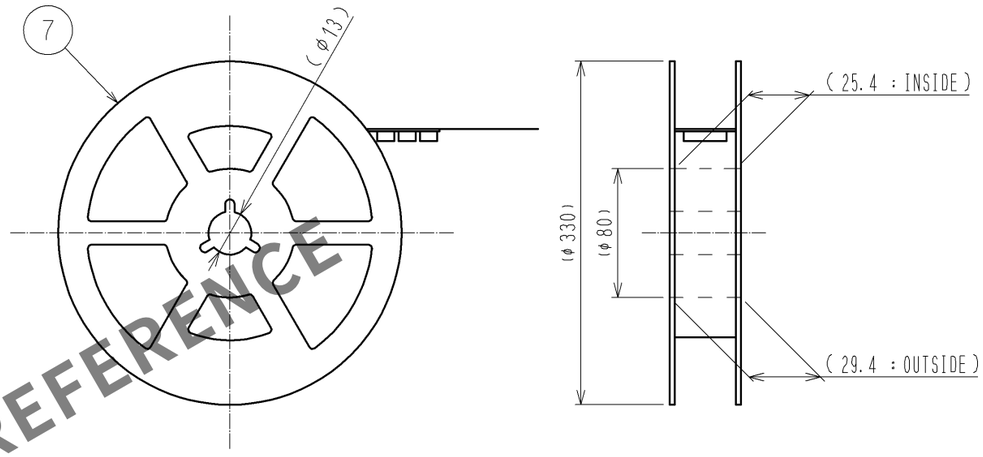

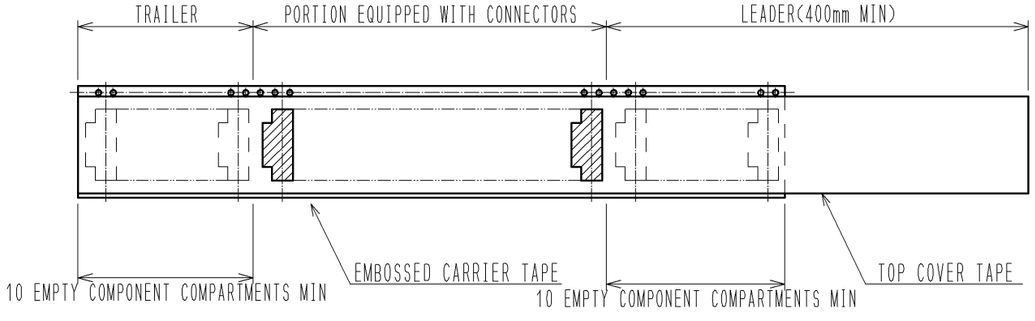

NOTE 4 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.
5 1 REEL:2000 CONNECTORS.

HRS DRAWING FOR REFERENCE

<DRAWING FOR PACKING>

HRS	DRAWING NO.	EDC3-152957-51
	PART NO.	FH12A-12S-0.5SH(55)
	CODE NO.	CL586-0696-4-55