TYRE DATA BOOKLET

275/675-19 DHB
275/675-19 WH
2022 - 2026

CONTENTS:

1: INTRODUCTION

2: STATIC DIMENSIONS (DHB/WH)

3: DYNAMIC MEASUREMENTS (DHB)

4: DYNAMIC MEASUREMENTS (WH)

5: STATIC RADIAL DEFLECTION (DHB)

INTRODUCTION

INTRODUCTION
This document provides the user with technical information regarding several aspects of the tyre characteristics. The data was acquired using indoor testing methods on physical tyres. For individual car fitments, usage guidelines and prescriptions for camber and pressure please refer to the relevent Pirelli Technical Booklet, which is included as part of this Pirelli Data Package.

STATIC DIMENSIONS

Slick Tyres				
Size & Fitment	Nominal Weight (kilograms)	Max Width **(C)** (mm)	Circumference **(πD)** (mm)	Tread Width **(Cb)** (mm)
275/675-19 DHB 19"x9.5J	9.6	267	2162	240

Wet Tyres				
Size & Fitment	Nominal Weight (kilograms)	Max Width **(C)** (mm)	Circumference **(πD)** (mm)	Tread Width **(Cb)** (mm)
275/675-19 WH 19"x9.5J	10.5	269	2146	252

DYNAMIC MEASUREMENTS @ 1.9bar (27.5psi), CA 0.0°

275/675-19x9.5J DHB

LOADED RADIUS

SPEED [km/h] \ LOAD [kg]	150	300	450	600	750
20	336.9	331.4	326.0	320.8	315.7
60	337.2	331.9	326.6	321.4	316.2
100	337.7	332.5	327.3	322.1	316.8
140	338.2	333.1	328.0	322.9	317.6
180	338.8	333.9	328.9	323.8	318.6
220	339.5	334.7	329.8	324.9	319.8
260	340.3	335.6	330.9	326.0	321.1

ROLLING RADIUS

SPEED [km/h] \ LOAD [kg]	150	300	450	600	750
20	339.6	338.7	338.2	337.8	337.5
60	339.7	338.8	338.3	337.9	337.7
100	340.0	339.1	338.6	338.2	337.9
140	340.3	339.5	338.9	338.6	338.3
180	340.8	339.9	339.4	339.1	338.8
220	341.4	340.5	340.0	339.7	339.4
260	342.1	341.2	340.7	340.4	340.1

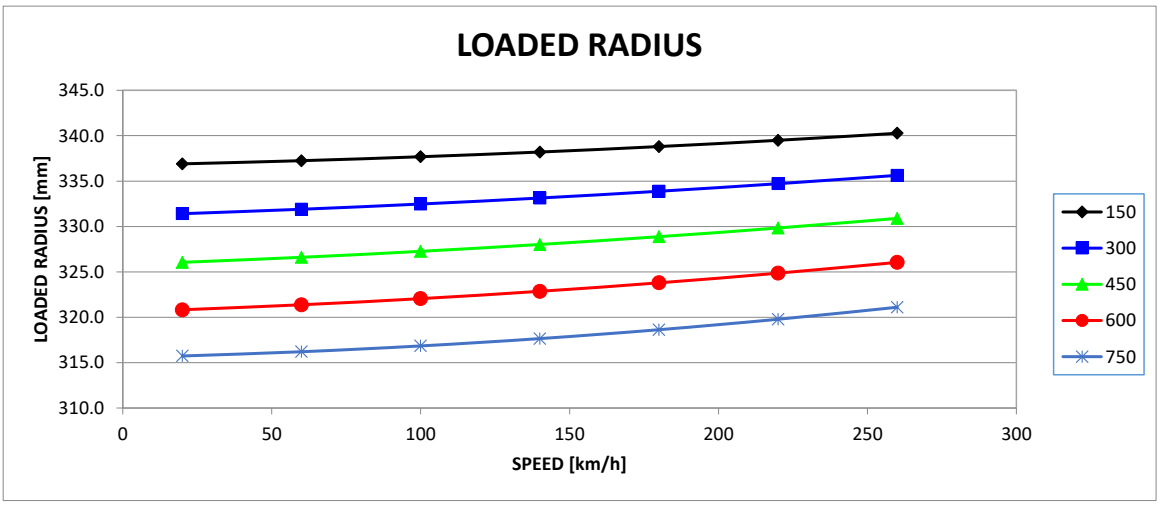

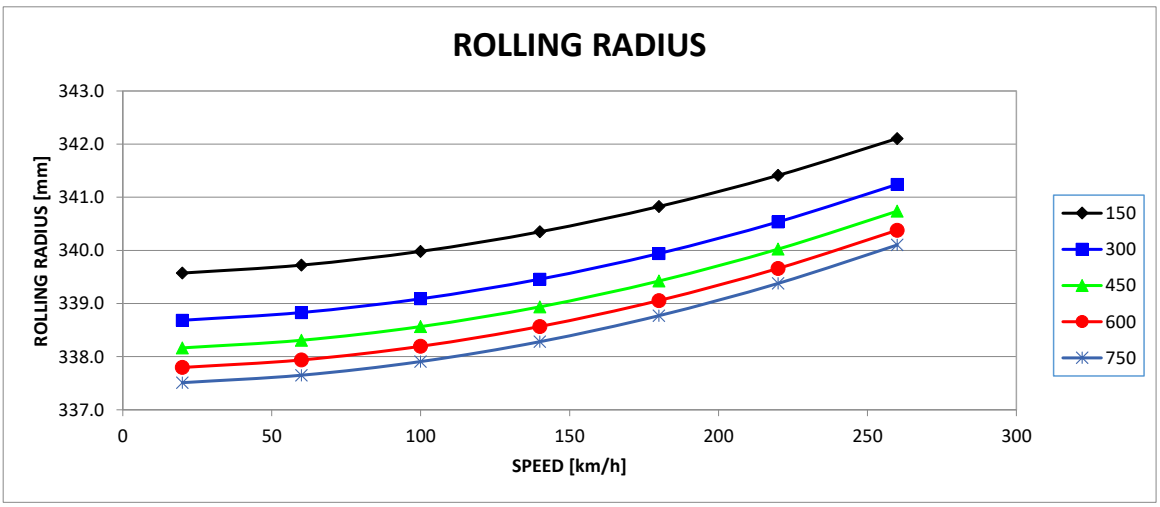

DYNAMIC MEASUREMENTS @ 1.9bar (27.5psi), CA 0.0°

275/675-19x9.5J WH

LOADED RADIUS

SPEED [km/h] \ LOAD [kg]	41	122	265	408	510	612
30	341.2	337.9	332.7	327.7	324.4	321.2
100	343.1	339.8	334.7	329.7	326.3	323.1
180	345.5	342.5	337.7	333.0	329.7	326.5
250	348.2	345.7	341.2	336.9	333.7	330.5

ROLLING RADIUS

SPEED [km/h] \ LOAD [kg]	41	122	265	408	510	612
30	339.7	337.6	336.0	335.0	334.4	333.9
100	341.3	339.1	337.5	336.6	335.9	335.4
180	343.7	341.4	339.9	339.1	338.6	338.1
250	346.5	344.3	342.9	342.3	342.0	341.7

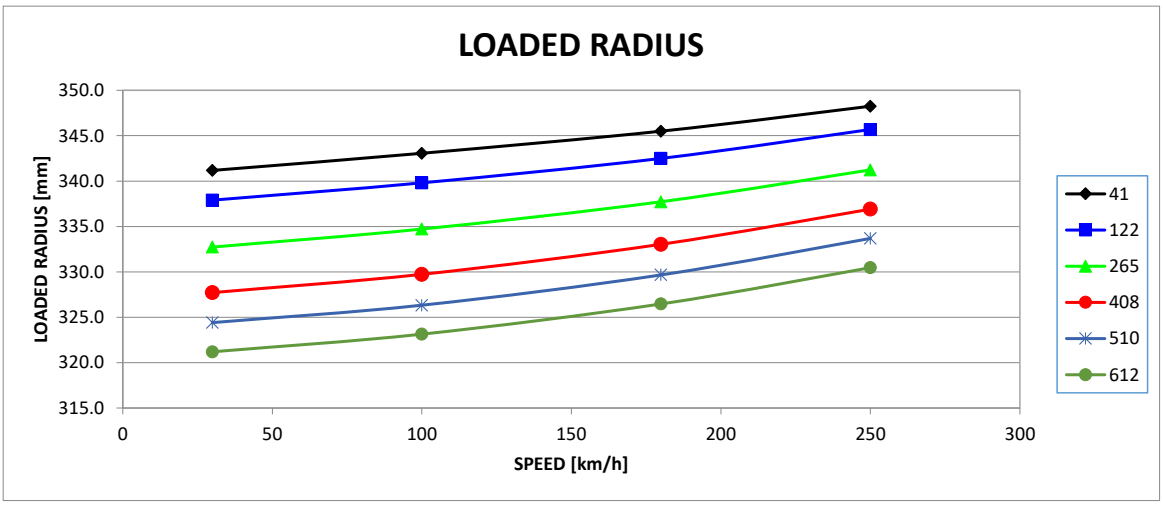

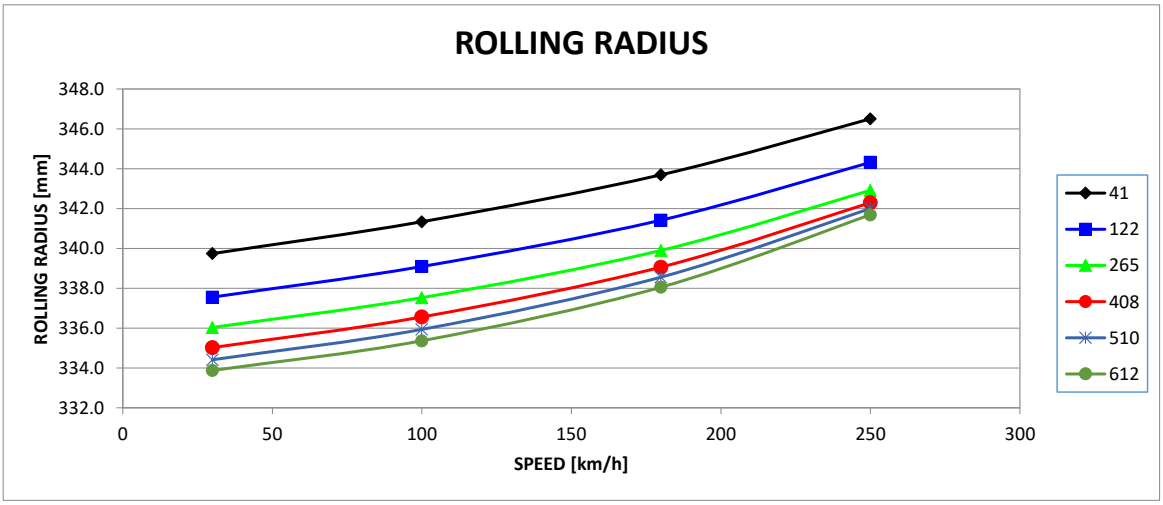

STATIC RADIAL DEFLECTION – 275/675-19x9.5J @ CA 0.0 ° DHB

Load [kg]	Inflation Pressure [bar]						
	2.6	2.4	2.2	2.0	1.8	1.6	1.4
0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
25	0.8	0.8	0.9	0.9	1.0	1.1	1.2
50	1.6	1.6	1.7	1.8	2.0	2.2	2.3
75	2.3	2.4	2.6	2.8	3.0	3.2	3.5
100	3.1	3.2	3.4	3.7	3.9	4.3	4.6
125	3.9	4.0	4.3	4.5	4.9	5.3	5.7
150	4.6	4.8	5.1	5.4	5.9	6.3	6.8
175	5.4	5.6	5.9	6.3	6.8	7.3	7.9
200	6.1	6.4	6.7	7.2	7.7	8.3	9.0
225	6.8	7.1	7.6	8.0	8.6	9.3	10.1
250	7.5	7.9	8.3	8.9	9.6	10.3	11.1
275	8.2	8.6	9.1	9.7	10.5	11.3	12.2
300	9.0	9.3	9.9	10.5	11.3	12.2	13.2
325	9.7	10.1	10.7	11.3	12.2	13.2	14.3
350	10.3	10.8	11.5	12.2	13.1	14.1	15.3
375	11.0	11.5	12.2	13.0	14.0	15.1	16.3
400	11.7	12.2	13.0	13.8	14.8	16.0	17.3
425	12.4	12.9	13.7	14.5	15.7	16.9	18.3
450	13.1	13.6	14.5	15.3	16.5	17.8	19.3
475	13.7	14.3	15.2	16.1	17.4	18.7	20.3
500	14.4	15.0	15.9	16.9	18.2	19.6	21.2
525	15.0	15.7	16.6	17.7	19.0	20.5	22.2
550	15.7	16.4	17.4	18.4	19.8	21.4	23.2
575	16.3	17.1	18.1	19.2	20.6	22.3	24.1
600	17.0	17.7	18.8	19.9	21.4	23.1	25.0
625	17.6	18.4	19.5	20.7	22.2	24.0	26.0
650	18.2	19.0	20.2	21.4	23.0	24.8	26.9
675	18.9	19.7	20.9	22.1	23.8	25.7	27.8
700	19.5	20.3	21.5	22.9	24.6	26.5	28.7
725	20.1	21.0	22.2	23.6	25.4	27.4	29.6
750	20.7	21.6	22.9	24.3	26.1	28.2	30.5
775	21.3	22.3	23.6	25.0	26.9	29.0	31.4
800	21.9	22.9	24.2	25.7	27.7	29.8	32.3

STATIC RADIAL DEFLECTION – 275/675-19x9.5J @ CA 0.0° DHB

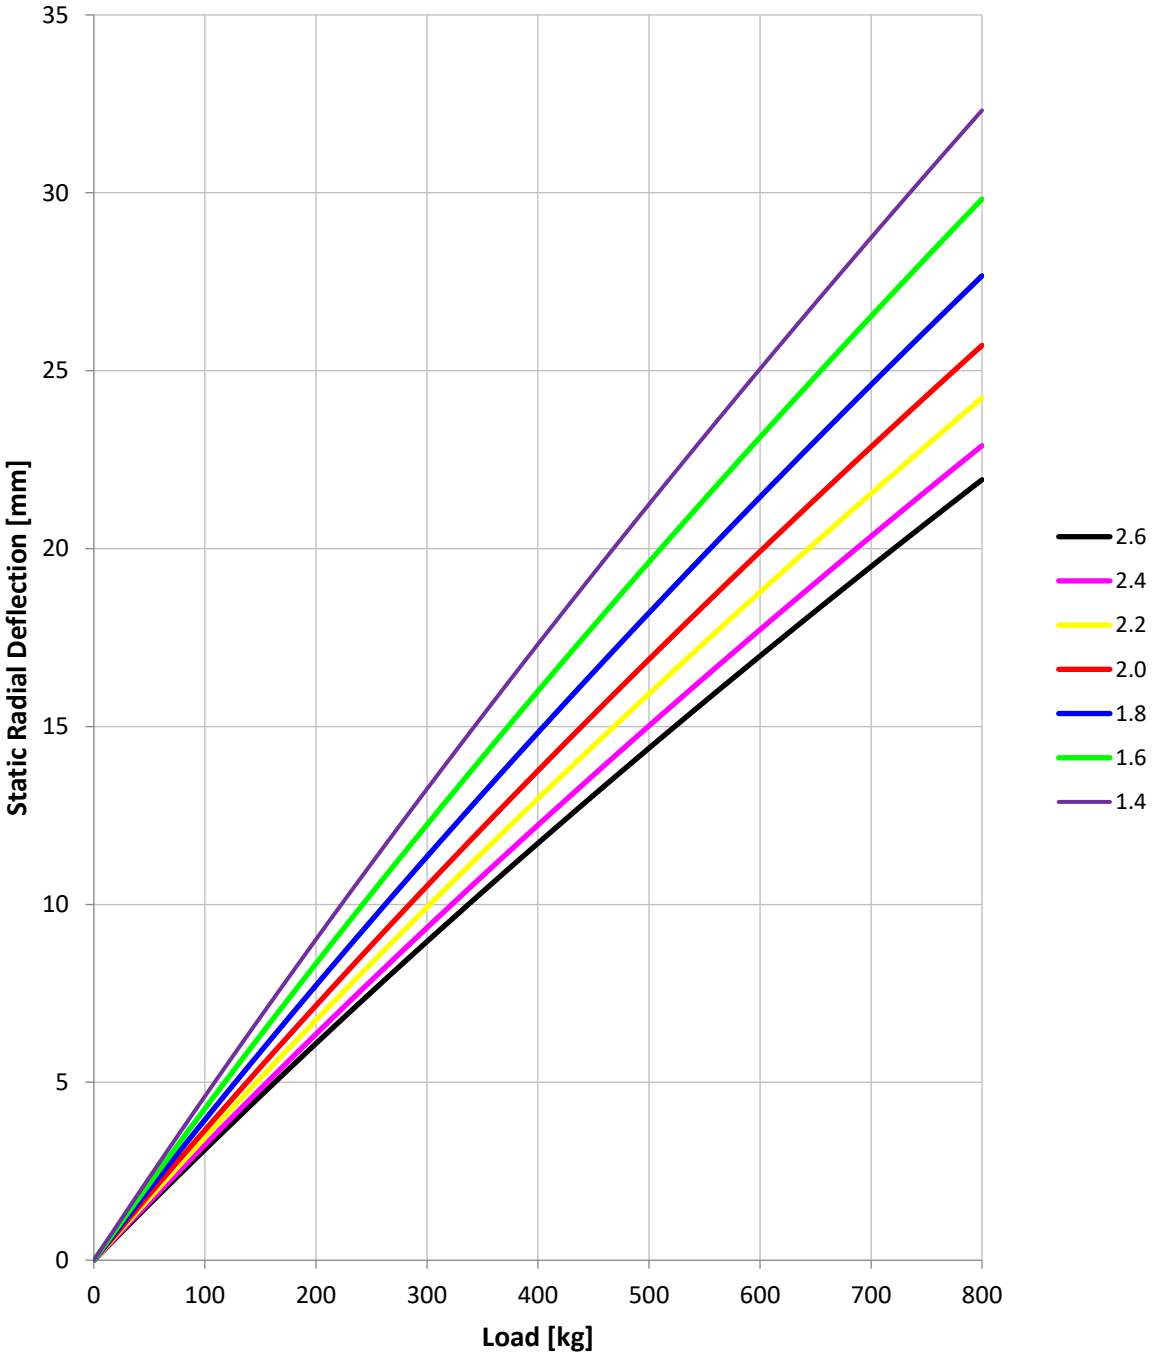

STATIC RADIAL DEFLECTION – 275/675-19x9.5J @ CA 4.0 ° DHB

2.6	2.4	2.2	2.0	1.8	1.6	1.4
0.0	0.0	0.0	0.0	0.0	0.0	0.0
1.0	1.0	1.1	1.1	1.2	1.3	1.4
1.9	2.0	2.1	2.3	2.4	2.6	2.8
2.8	3.0	3.1	3.3	3.6	3.8	4.2
3.7	4.0	4.1	4.4	4.7	5.0	5.5
4.6	4.9	5.1	5.4	5.8	6.2	6.8
5.5	5.8	6.1	6.4	6.9	7.4	8.0
6.3	6.7	7.0	7.4	7.9	8.5	9.3
7.1	7.5	7.9	8.4	9.0	9.6	10.5
7.9	8.4	8.8	9.4	10.0	10.7	11.6
8.7	9.2	9.7	10.3	11.0	11.8	12.8
9.5	10.0	10.5	11.2	11.9	12.8	13.9
10.3	10.8	11.4	12.1	12.9	13.9	15.1
11.0	11.6	12.2	13.0	13.9	14.9	16.2
11.8	12.4	13.0	13.9	14.8	15.9	17.3
12.5	13.1	13.8	14.7	15.7	16.9	18.3
13.2	13.9	14.6	15.6	16.6	17.9	19.4
13.9	14.6	15.4	16.4	17.5	18.8	20.4
14.6	15.3	16.1	17.2	18.4	19.8	21.4
15.3	16.0	16.9	18.0	19.3	20.7	22.4
16.0	16.7	17.6	18.8	20.1	21.6	23.4
16.7	17.4	18.4	19.6	21.0	22.6	24.4
17.3	18.1	19.1	20.4	21.8	23.5	25.4
18.0	18.8	19.8	21.1	22.6	24.3	26.3
18.6	19.5	20.5	21.9	23.4	25.2	27.3
19.2	20.1	21.2	22.6	24.2	26.1	28.2
19.9	20.8	21.9	23.4	25.0	26.9	29.1
20.5	21.4	22.6	24.1	25.8	27.8	30.0
21.1	22.0	23.3	24.8	26.6	28.6	30.9
21.7	22.7	23.9				
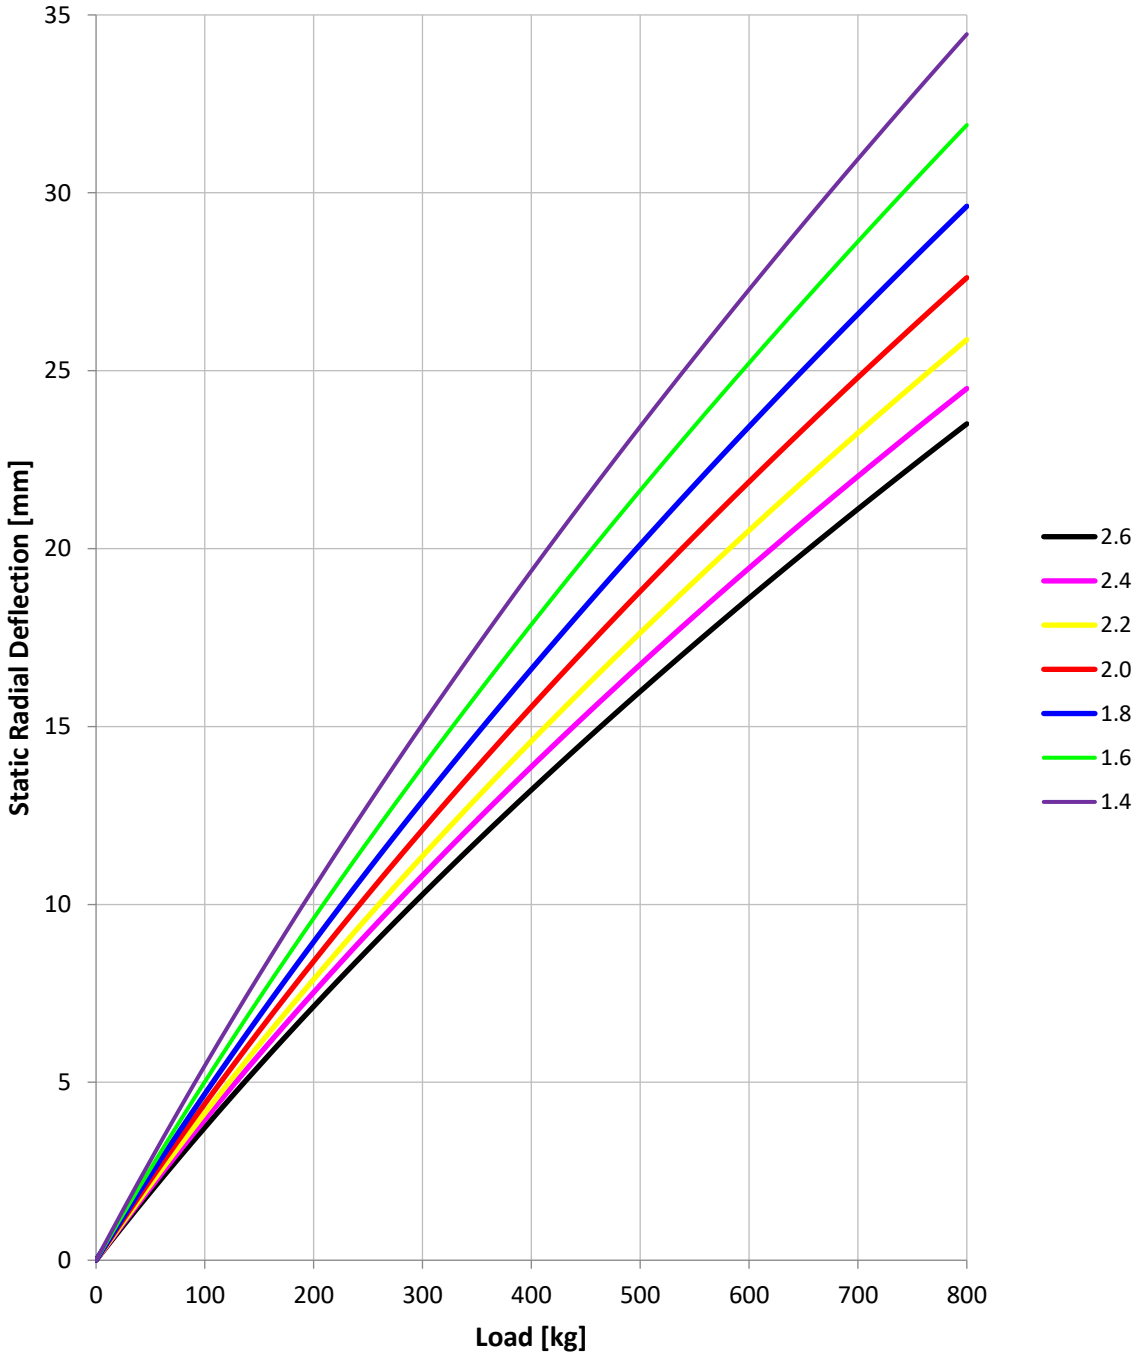
STATIC RADIAL DEFLECTION – 275/675-19x9.5J @ CA 4.0° DHB