TYRE DATA BOOKLET

280/650-18 DHG
280/650-18 WHB
2025 - 2026

CONTENTS:

1: INTRODUCTION

2: STATIC DIMENSIONS (DHG/WHB)

3: DYNAMIC MEASUREMENTS (DHG)

4: DYNAMIC MEASUREMENTS (WHB)

5: STATIC RADIAL DEFLECTION (DHG)

6: STATIC RADIAL DEFLECTION (WHB)

INTRODUCTION

INTRODUCTION
This document provides the user with technical information regarding several aspects of the tyre characteristics. The data was acquired using indoor testing methods on physical tyres. For individual car fitments, usage guidelines and prescriptions for camber and pressure please refer to the relevent Pirelli Technical Booklet, which is included as part of this Pirelli Data Package.

STATIC DIMENSIONS

Slick Tyres				
Size & Fitment	Nominal Weight (kilograms)	Max Width **(C)** (mm)	Circumference **(πD)** (mm)	Tread Width **(Cb)** (mm)
280/650-18 DHG 18"x11.0J	9.9	297	2027	272

Wet Tyres				
Size & Fitment	Nominal Weight (kilograms)	Max Width **(C)** (mm)	Circumference **(πD)** (mm)	Tread Width **(Cb)** (mm)
280/650-18 WHB 18"x11.0J	11.1	294	2033	269

DYNAMIC MEASUREMENTS @ 2.0bar (29psi), CA 0.0°

280/650-18x11.0J DHG

LOADED RADIUS

SPEED [km/h] \ LOAD [kg]	150	300	450	600	750
20	317.7	312.6	307.7	303.0	298.5
60	317.9	312.9	308.1	303.3	298.7
100	318.3	313.4	308.7	303.9	299.3
140	318.9	314.2	309.4	304.7	300.1
180	319.7	315.1	310.4	305.8	301.2
220	320.6	316.1	311.7	307.1	302.6
260	321.8	317.4	313.1	308.7	304.3

ROLLING RADIUS

SPEED [km/h] \ LOAD [kg]	150	300	450	600	750
20	317.9	316.8	316.2	315.7	315.4
60	317.9	316.9	316.2	315.8	315.4
100	318.2	317.1	316.5	316.0	315.7
140	318.7	317.6	316.9	316.5	316.1
180	319.4	318.3	317.6	317.2	316.8
220	320.2	319.1	318.5	318.0	317.7
260	321.3	320.2	319.6	319.1	318.8

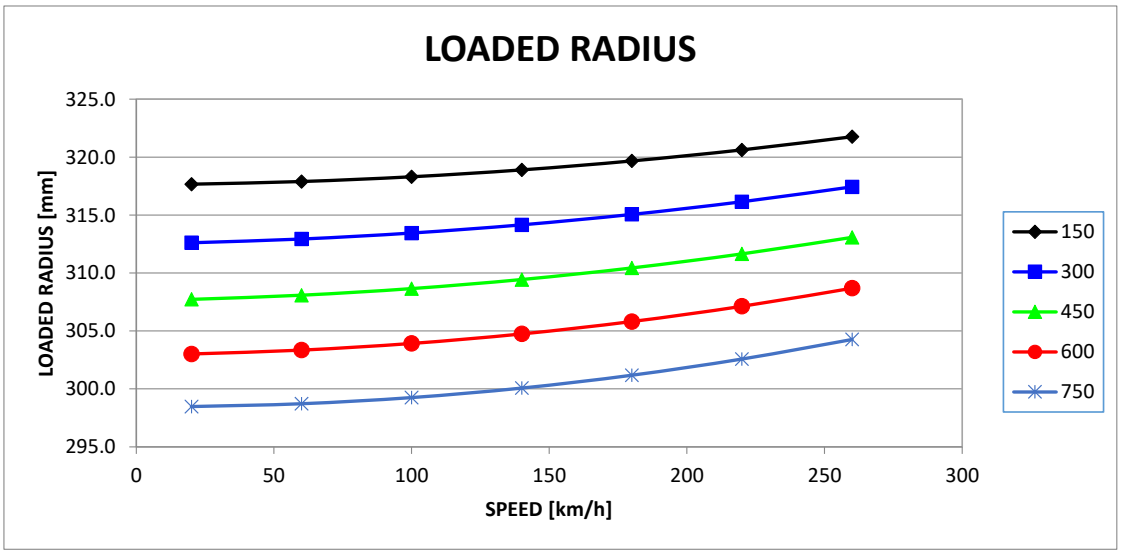

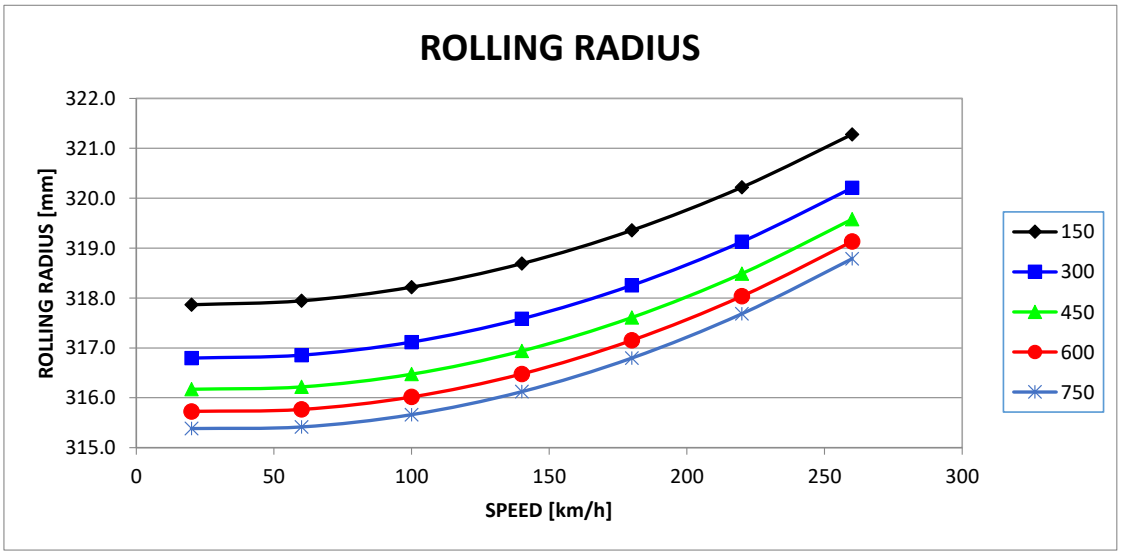

DYNAMIC MEASUREMENTS @ 1.8bar (26psi), CA 0.0°

280/650-18x11.0J DHG

LOADED RADIUS

SPEED [km/h] \ LOAD [kg]	150	300	450	600	750
20	317.1	311.7	306.4	301.3	296.3
60	317.4	312.1	306.8	301.7	296.6
100	317.9	312.6	307.4	302.3	297.3
140	318.5	313.3	308.2	303.2	298.2
180	319.3	314.3	309.3	304.3	299.3
220	320.3	315.4	310.6	305.7	300.8
260	321.5	316.8	312.1	307.3	302.4

ROLLING RADIUS

SPEED [km/h] \ LOAD [kg]	150	300	450	600	750
20	317.6	316.6	316.0	315.6	315.3
60	317.7	316.7	316.1	315.6	315.3
100	318.0	317.0	316.3	315.9	315.5
140	318.5	317.4	316.8	316.3	316.0
180	319.2	318.1	317.5	317.0	316.7
220	320.1	319.0	318.4	317.9	317.6
260	321.2	320.1	319.5	319.0	318.7

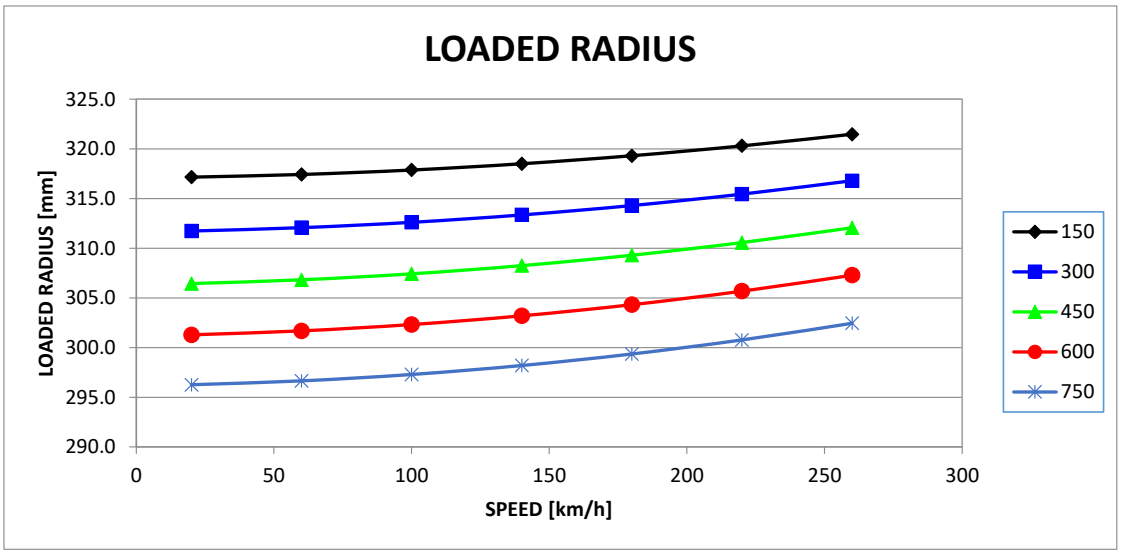

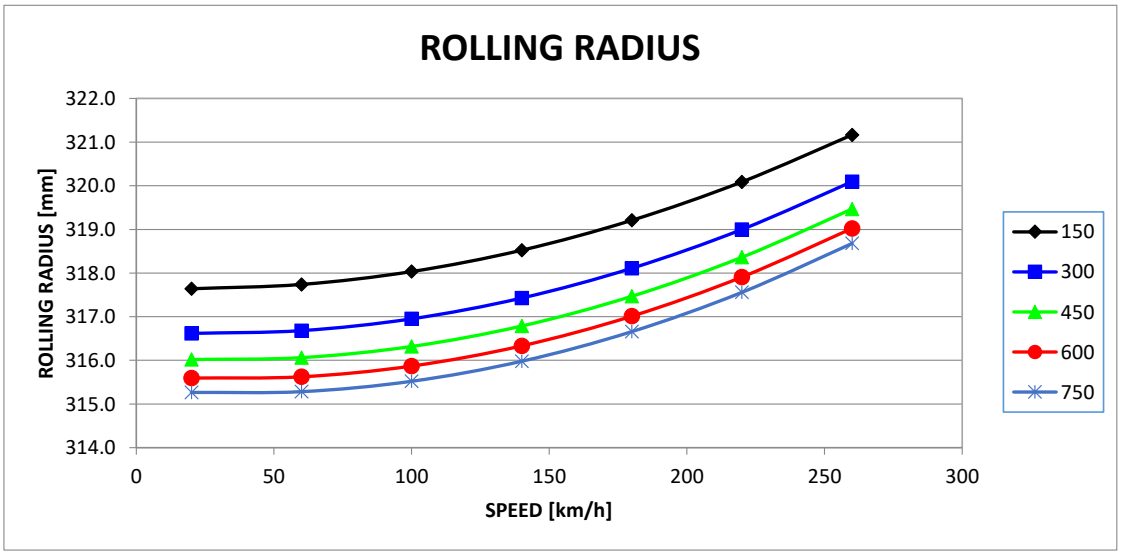

DYNAMIC MEASUREMENTS @ 2.0bar (29psi), CA 0.0°

280/650-18x11.0J WHB

LOADED RADIUS

SPEED [km/h] \ LOAD [kg]	150	300	450	600	750
20	318.0	313.1	308.4	303.9	299.5
60	318.3	313.5	308.9	304.4	300.0
100	318.8	314.1	309.5	305.1	300.7
140	319.5	314.9	310.4	306.0	301.7
180	320.3	315.7	311.3	307.1	302.9
220	321.2	316.8	312.5	308.4	304.4
260	322.2	318.0	313.9	309.9	306.1
280					
300					

ROLLING RADIUS

SPEED [km/h] \ LOAD [kg]	150	300	450	600	750
20	317.9	316.4	315.5	314.9	314.4
60	318.1	316.5	315.6	315.0	314.5
100	318.4	316.8	315.9	315.2	314.7
140	318.9	317.3	316.3	315.7	315.2
180	319.5	317.9	317.0	316.3	315.8
220	320.4	318.7	317.8	317.1	316.6
260	321.4	319.7	318.8	318.1	317.5
280					
300					

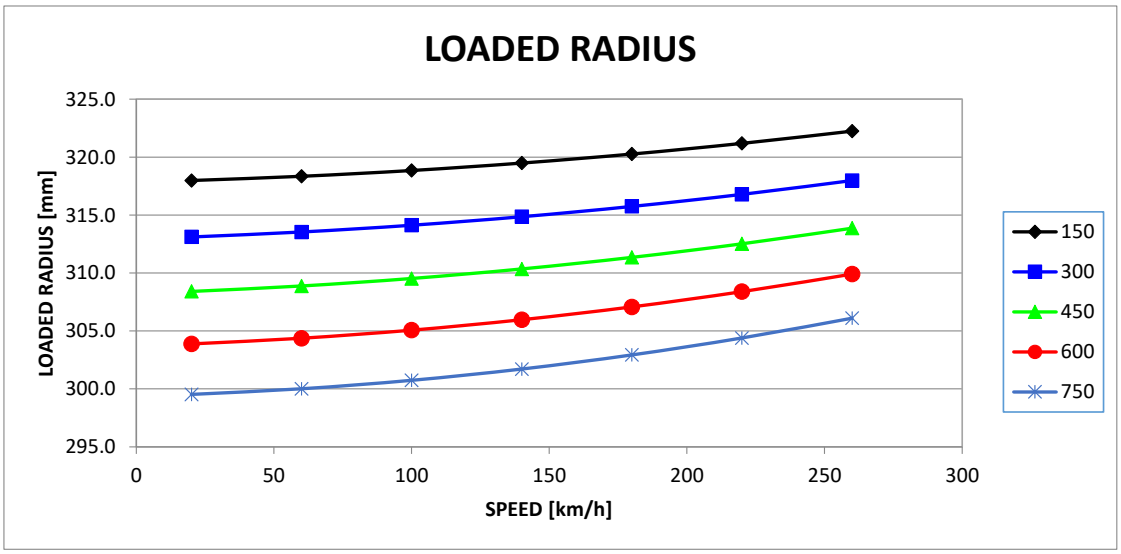

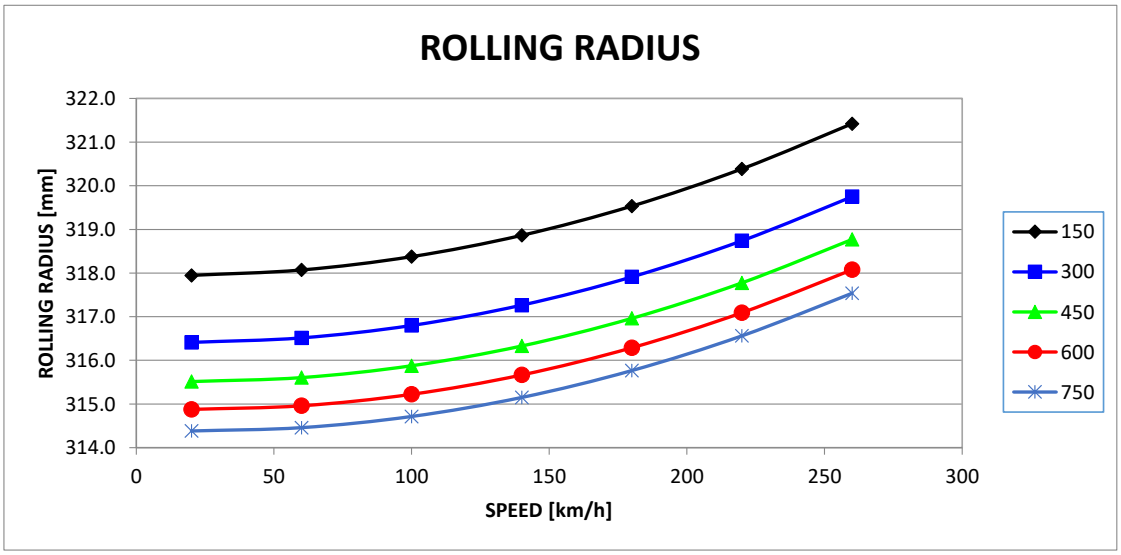

DYNAMIC MEASUREMENTS @ 1.80bar (26psi), CA 0.0°

280/650-18x11.0J WHB

LOADED RADIUS

SPEED [km/h] \ LOAD [kg]	150	300	450	600	750
20	317.6	312.3	307.1	302.2	297.5
60	318.0	312.8	307.7	302.9	298.1
100	318.6	313.4	308.5	303.7	299.0
140	319.2	314.2	309.3	304.6	300.0
180	320.0	315.1	310.4	305.7	301.3
220	321.0	316.2	311.5	307.0	302.7
260	322.0	317.3	312.8	308.4	304.3
280					
300					

ROLLING RADIUS

SPEED [km/h] \ LOAD [kg]	150	300	450	600	750
20	317.8	316.4	315.5	314.9	314.4
60	318.0	316.5	315.6	315.0	314.5
100	318.3	316.8	315.9	315.3	314.8
140	318.8	317.3	316.4	315.7	315.2
180	319.4	317.9	317.0	316.3	315.8
220	320.3	318.7	317.8	317.1	316.6
260	321.3	319.7	318.7	318.1	317.5
280					
300					

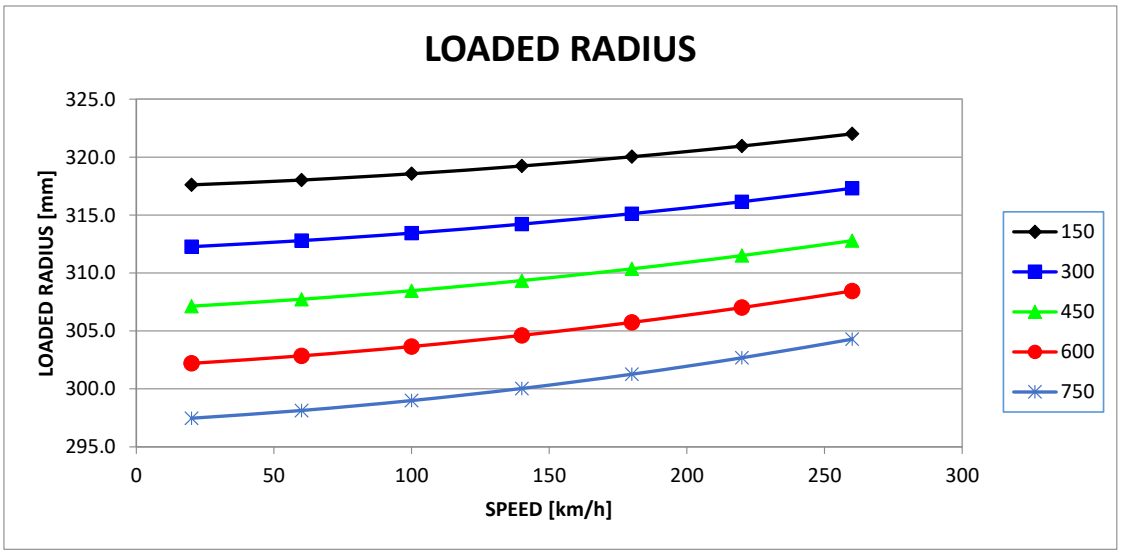

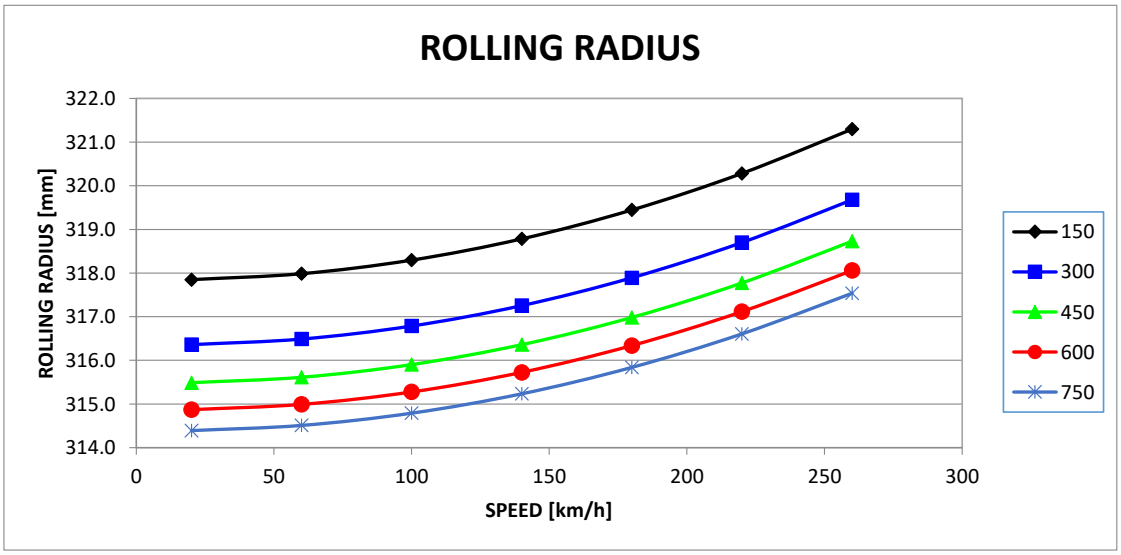

STATIC RADIAL DEFLECTION – 280/650-18x11.0J @ CA 0.0 ° DHG

Load [kg]	Inflation Pressure [bar]						
	2.6	2.4	2.2	2.0	1.8	1.6	1.4
0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
25	0.7	0.7	0.8	0.9	0.9	1.0	1.1
50	1.4	1.5	1.6	1.7	1.8	2.0	2.2
75	2.1	2.2	2.4	2.5	2.7	2.9	3.2
100	2.8	2.9	3.1	3.3	3.6	3.9	4.3
125	3.5	3.6	3.9	4.2	4.5	4.8	5.3
150	4.1	4.3	4.6	5.0	5.4	5.7	6.3
175	4.8	5.0	5.4	5.8	6.2	6.6	7.3
200	5.5	5.7	6.1	6.5	7.1	7.5	8.3
225	6.1	6.4	6.8	7.3	7.9	8.4	9.3
250	6.8	7.0	7.6	8.1	8.7	9.3	10.2
275	7.4	7.7	8.3	8.9	9.5	10.2	11.2
300	8.0	8.4	9.0	9.6	10.3	11.0	12.1
325	8.7	9.0	9.7	10.4	11.1	11.9	13.0
350	9.3	9.7	10.4	11.1	11.9	12.7	14.0
375	9.9	10.3	11.1	11.9	12.7	13.6	14.9
400	10.6	11.0	11.8	12.6	13.5	14.4	15.8
425	11.2	11.6	12.5	13.3	14.2	15.2	16.7
450	11.8	12.2	13.1	14.0	15.0	16.0	17.6
475	12.4	12.9	13.8	14.8	15.7	16.8	18.4
500	13.0	13.5	14.5	15.5	16.5	17.6	19.3
525	13.6	14.1	15.1	16.2	17.2	18.4	20.2
550	14.2	14.7	15.8	16.9	18.0	19.2	21.0
575	14.8	15.3	16.4	17.6	18.7	20.0	21.8
600	15.4	15.9	17.1	18.2	19.4	20.7	22.7
625	16.0	16.5	17.7	18.9	20.1	21.5	23.5
650	16.5	17.1	18.4	19.6	20.8	22.3	24.3
675	17.1	17.7	19.0	20.3	21.5	23.0	25.1
700	17.7	18.3	19.6	20.9	22.2	23.8	26.0
725	18.3	18.8	20.2	21.6	22.9	24.5	26.8
750	18.8	19.4	20.9	22.2	23.6	25.2	27.5
775	19.4	20.0	21.5	22.9	24.3	26.0	28.3
800	20.0	20.6	22.1	23.5	24.9	26.7	29.1

STATIC RADIAL DEFLECTION – 280/650-18x11.0J @ CA 0.0° DHG

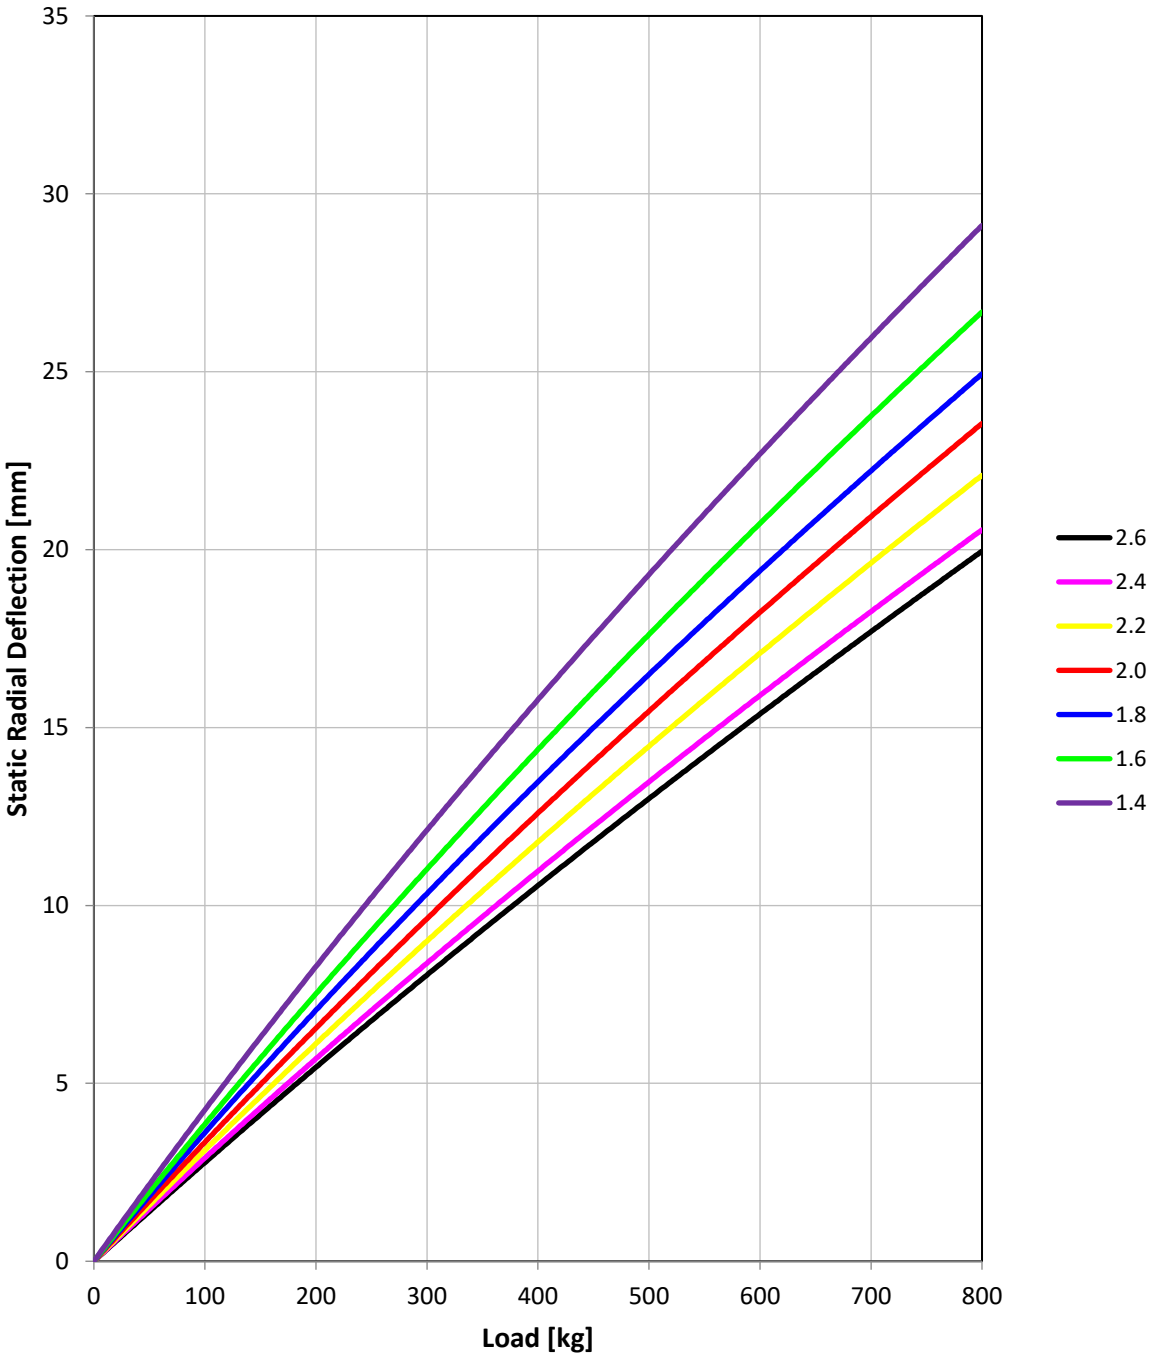

STATIC RADIAL DEFLECTION – 280/650-18x11.0J @ CA -3.0 ° DHG

Load [kg]	Inflation Pressure [bar]						
	2.6	2.4	2.2	2.0	1.8	1.6	1.4
0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
25	0.9	0.9	1.0	1.0	1.1	1.2	1.3
50	1.7	1.8	1.9	2.0	2.2	2.3	2.5
75	2.6	2.7	2.8	3.0	3.2	3.4	3.8
100	3.4	3.6	3.7	3.9	4.2	4.5	5.0
125	4.2	4.4	4.6	4.8	5.2	5.6	6.1
150	5.0	5.3	5.5	5.7	6.2	6.6	7.3
175	5.8	6.1	6.3	6.6	7.1	7.6	8.4
200	6.5	6.9	7.1	7.5	8.1	8.6	9.5
225	7.2	7.6	8.0	8.4	9.0	9.6	10.5
250	8.0	8.4	8.8	9.2	9.9	10.6	11.6
275	8.7	9.2	9.5	10.0	10.8	11.5	12.6
300	9.4	9.9	10.3	10.9	11.6	12.4	13.6
325	10.1	10.6	11.1	11.7	12.5	13.4	14.6
350	10.8	11.3	11.8	12.4	13.3	14.3	15.6
375	11.4	12.0	12.6	13.2	14.2	15.2	16.5
400	12.1	12.7	13.3	14.0	15.0	16.0	17.5
425	12.7	13.4	14.0	14.7	15.8	16.9	18.4
450	13.4	14.1	14.7	15.5	16.6	17.7	19.3
475	14.0	14.7	15.4	16.2	17.4	18.6	20.2
500	14.7	15.4	16.1	17.0	18.1	19.4	21.1
525	15.3	16.0	16.8	17.7	18.9	20.2	22.0
550	15.9	16.7	17.4	18.4	19.7	21.0	22.8
575	16.5	17.3	18.1	19.1	20.4	21.8	23.7
600	17.1	17.9	18.7	19.8	21.1	22.6	24.5
625	17.7	18.5	19.4	20.5	21.9	23.4	25.3
650	18.2	19.1	20.0	21.1	22.6	24.2	26.2
675	18.8	19.7	20.7	21.8	23.3	24.9	27.0
700	19.4	20.3	21.3	22.5	24.0	25.7	27.8
725	20.0	20.9	21.9	23.1	24.7	26.5	28.6
750	20.5	21.5	22.5	23.8	25.4	27.2	29.4
775	21.1	22.1	23.1	24.4	26.1	27.9	30.1
800	21.6	22.6	23.7	25.1	26.8	28.6	30.9

STATIC RADIAL DEFLECTION – 280/650-18x11.0J @ CA -3.0° DHG

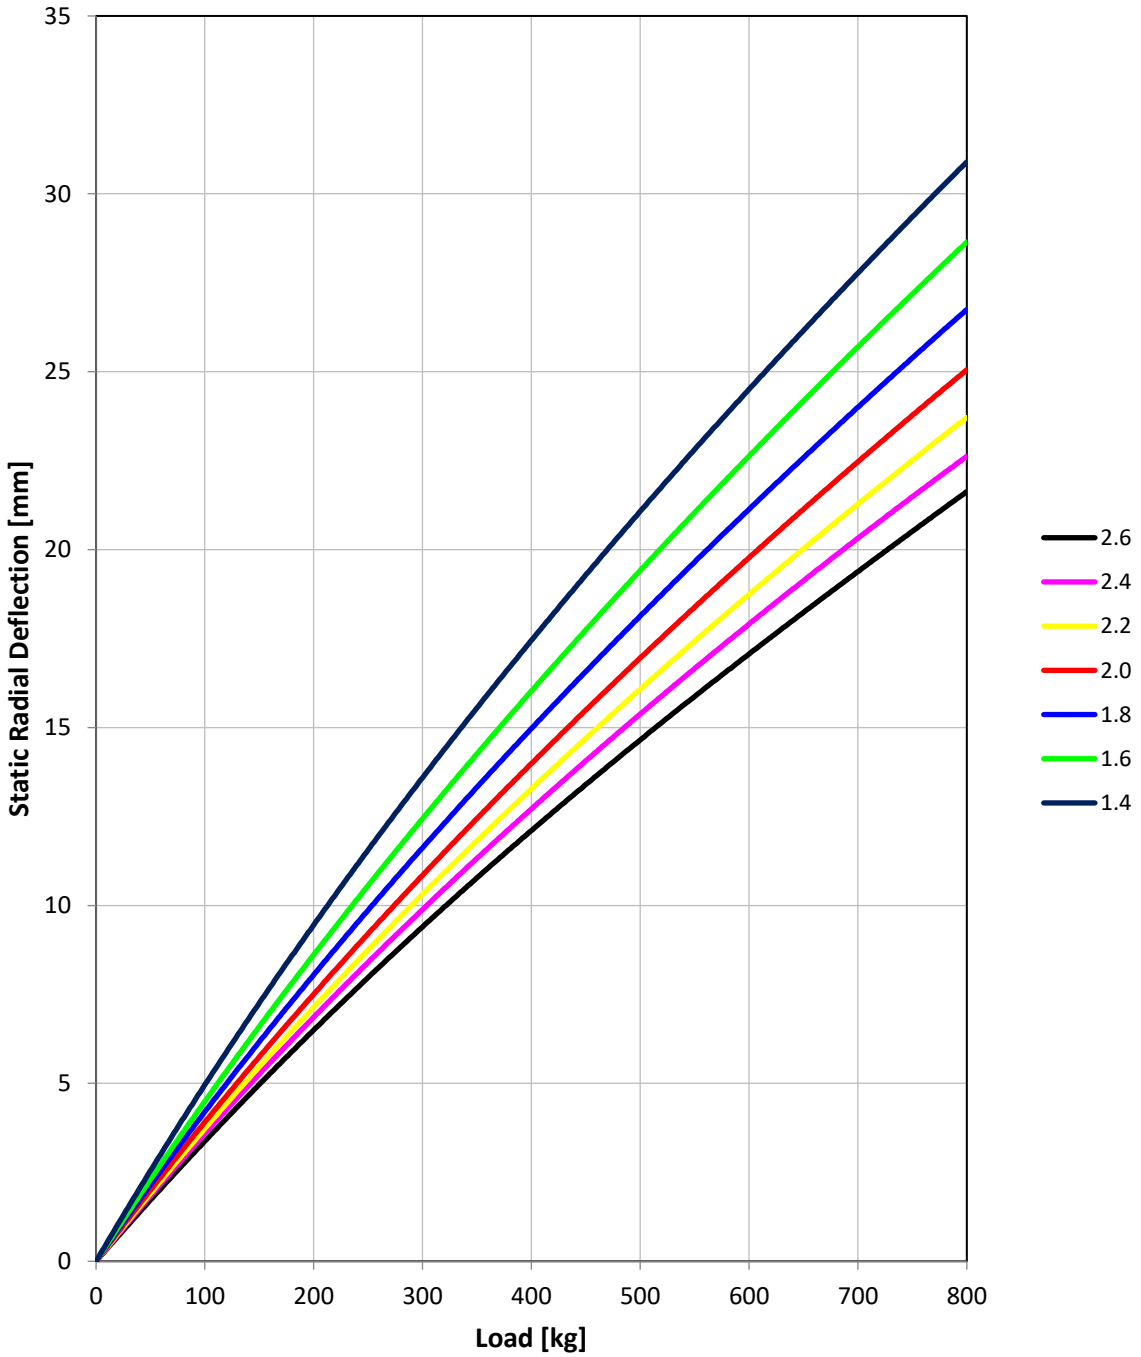

STATIC RADIAL DEFLECTION – 280/650-18x11.0J @ CA 0.0 ° WHB

Load [kg]	Inflation Pressure [bar]						
	2.6	2.4	2.2	2.0	1.8	1.6	1.4
0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
25	0.7	0.8	0.8	0.9	0.9	1.0	1.0
50	1.4	1.5	1.6	1.7	1.8	1.9	2.1
75	2.1	2.2	2.4	2.5	2.7	2.9	3.1
100	2.8	3.0	3.2	3.3	3.5	3.8	4.1
125	3.5	3.7	3.9	4.2	4.4	4.7	5.1
150	4.2	4.4	4.7	5.0	5.2	5.6	6.1
175	4.9	5.1	5.4	5.7	6.0	6.5	7.0
200	5.5	5.8	6.1	6.5	6.9	7.4	8.0
225	6.2	6.5	6.9	7.3	7.7	8.2	8.9
250	6.9	7.2	7.6	8.0	8.5	9.1	9.9
275	7.5	7.8	8.3	8.8	9.3	10.0	10.8
300	8.1	8.5	9.0	9.5	10.0	10.8	11.7
325	8.8	9.1	9.7	10.3	10.8	11.6	12.6
350	9.4	9.8	10.3	11.0	11.6	12.5	13.5
375	10.0	10.4	11.0	11.7	12.4	13.3	14.4
400	10.6	11.0	11.7	12.4	13.1	14.1	15.3
425	11.2	11.7	12.3	13.1	13.9	14.9	16.1
450	11.8	12.3	13.0	13.8	14.6	15.7	17.0
475	12.4	12.9	13.6	14.5	15.3	16.5	17.9
500	13.0	13.5	14.3	15.2	16.1	17.3	18.7
525	13.6	14.1	14.9	15.8	16.8	18.0	19.5
550	14.2	14.7	15.6	16.5	17.5	18.8	20.4
575	14.8	15.3	16.2	17.2	18.2	19.6	21.2
600	15.3	15.9	16.8	17.8	18.9	20.3	22.0
625	15.9	16.5	17.4	18.5	19.6	21.1	22.8
650	16.5	17.0	18.0	19.1	20.3	21.8	23.6
675	17.0	17.6	18.6	19.8	21.0	22.5	24.4
700	17.6	18.2	19.2	20.4	21.6	23.3	25.2
725	18.1	18.7	19.8	21.0	22.3	24.0	26.0
750	18.7	19.3	20.4	21.6	23.0	24.7	26.8
775	19.2	19.8	21.0	22.3	23.6	25.4	27.5
800	19.8	20.4	21.5	22.9	24.3	26.1	28.3

STATIC RADIAL DEFLECTION – 280/650-18x11.0J @ CA 0.0° WHB

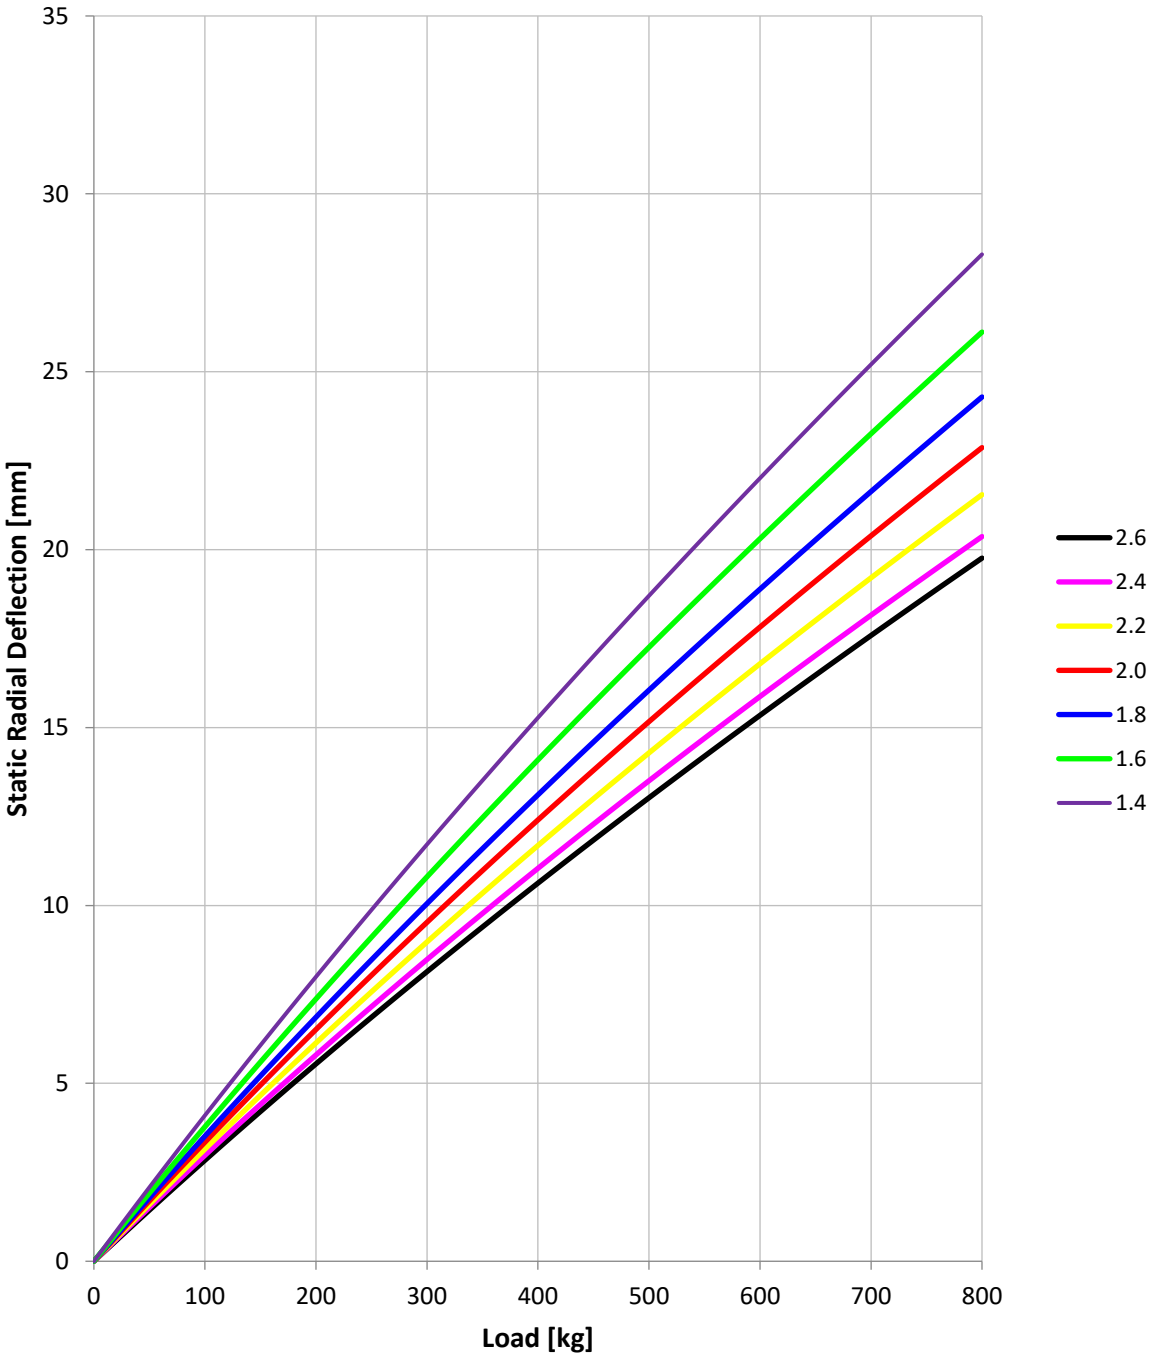

STATIC RADIAL DEFLECTION – 280/650-18x11.0J @ CA -3.0 ° WHB

Load [kg]	Inflation Pressure [bar]						
	2.6	2.4	2.2	2.0	1.8	1.6	1.4
0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
25	0.9	0.9	0.9	1.0	1.0	1.1	1.2
50	1.7	1.7	1.8	2.0	2.1	2.2	2.4
75	2.5	2.6	2.7	2.9	3.1	3.3	3.6
100	3.3	3.4	3.6	3.9	4.0	4.4	4.7
125	4.1	4.2	4.4	4.8	5.0	5.4	5.8
150	4.9	5.0	5.2	5.7	5.9	6.4	6.9
175	5.6	5.8	6.0	6.5	6.9	7.4	7.9
200	6.4	6.6	6.8	7.4	7.8	8.4	9.0
225	7.1	7.3	7.6	8.2	8.6	9.3	10.0
250	7.8	8.0	8.4	9.0	9.5	10.3	11.0
275	8.5	8.8	9.2	9.9	10.4	11.2	12.0
300	9.2	9.5	9.9	10.7	11.2	12.1	13.0
325	9.9	10.2	10.7	11.4	12.1	13.0	14.0
350	10.5	10.9	11.4	12.2	12.9	13.9	14.9
375	11.2	11.6	12.1	13.0	13.7	14.8	15.9
400	11.8	12.2	12.8	13.7	14.5	15.6	16.8
425	12.5	12.9	13.5	14.5	15.3	16.5	17.7
450	13.1	13.6	14.2	15.2	16.1	17.3	18.6
475	13.7	14.2	14.9	15.9	16.9	18.1	19.5
500	14.3	14.8	15.6	16.6	17.6	18.9	20.4
525	14.9	15.5	16.3	17.3	18.4	19.8	21.2
550	15.5	16.1	16.9	18.0	19.1	20.5	22.1
575	16.1	16.7	17.6	18.7	19.9	21.3	22.9
600	16.7	17.3	18.2	19.4	20.6	22.1	23.8
625	17.3	17.9	18.9	20.0	21.3	22.9	24.6
650	17.8	18.5	19.5	20.7	22.0	23.6	25.4
675	18.4	19.1	20.1	21.3	22.7	24.4	26.2
700	19.0	19.7	20.8	22.0	23.4	25.1	27.0
725	19.5	20.3	21.4	22.6	24.1	25.9	27.8
750	20.1	20.8	22.0	23.3	24.8	26.6	28.6
775	20.6	21.4	22.6	23.9	25.5	27.3	29.4
800	21.1	22.0	23.2	24.5	26.1	28.0	30.1
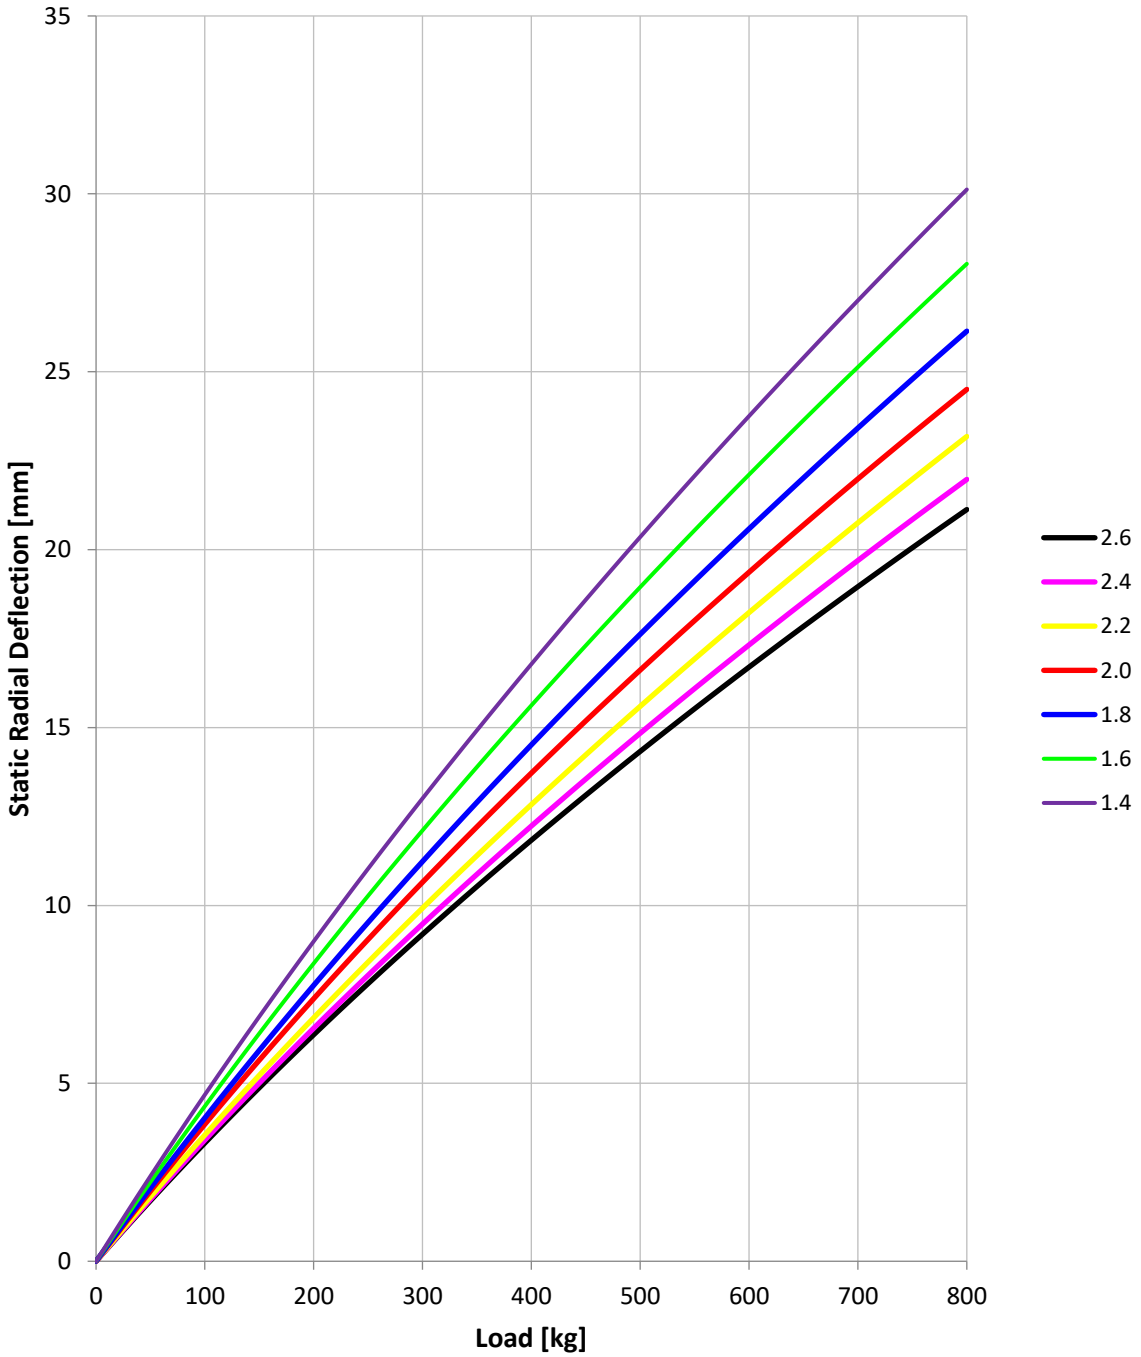
STATIC RADIAL DEFLECTION – 280/650-18x11.0J @ CA -3.0° WHB