TYRE DATA BOOKLET

280/680-19 DH
280/680-19 WH
2024 - 2026

CONTENTS:

1: INTRODUCTION

2: STATIC DIMENSIONS (DH/WH)

3: DYNAMIC MEASUREMENTS (DH)

4: DYNAMIC MEASUREMENTS (WH)

5: STATIC RADIAL DEFLECTION (DH)

5: STATIC RADIAL DEFLECTION (WH)

INTRODUCTION

INTRODUCTION
This document provides the user with technical information regarding several aspects of the tyre characteristics. The data was acquired using indoor testing methods on physical tyres. For individual car fitments, usage guidelines and prescriptions for camber and pressure please refer to the relevent Pirelli Technical Booklet, which is included as part of this Pirelli Data Package.

STATIC DIMENSIONS

Slick Tyres				
Size & Fitment	Nominal Weight (kilograms)	Max Width **(C)** (mm)	Circumference **(πD)** (mm)	Tread Width **(Cb)** (mm)
280/680-19 DH 19"x11J	10.4	300	2152	274

Wet Tyres				
Size & Fitment	Nominal Weight (kilograms)	Max Width **(C)** (mm)	Circumference **(πD)** (mm)	Tread Width **(Cb)** (mm)
280/680-19 WH 19"x11J	11.8	300	2152	274

DYNAMIC MEASUREMENTS @ 1.9bar (27.5psi), CA 0.0°

280/680-19x11J DH

LOADED RADIUS

SPEED [km/h] \ LOAD [kg]	150	300	450	600	750
20	338.2	333.1	328.1	323.5	319.1
60	338.6	333.5	328.6	324.0	319.6
100	339.0	334.0	329.3	324.7	320.3
140	339.6	334.7	330.0	325.5	321.2
180	340.3	335.6	331.0	326.5	322.2
220	341.1	336.5	332.0	327.7	323.5
260	342.0	337.6	333.3	329.0	324.9

ROLLING RADIUS

SPEED [km/h] \ LOAD [kg]	150	300	450	600	750
20	336.4	335.6	335.1	334.8	334.6
60	336.9	336.0	335.5	335.2	334.9
100	337.4	336.5	336.0	335.6	335.3
140	338.0	337.0	336.5	336.1	335.8
180	338.6	337.6	337.0	336.6	336.3
220	339.2	338.2	337.7	337.3	337.0
260	339.9	338.9	338.4	338.0	337.7

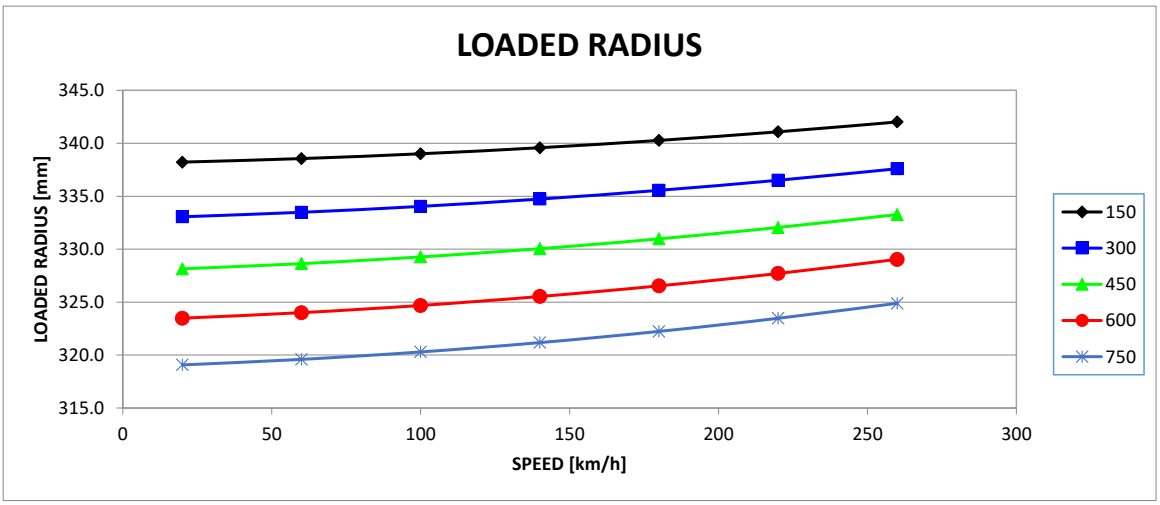

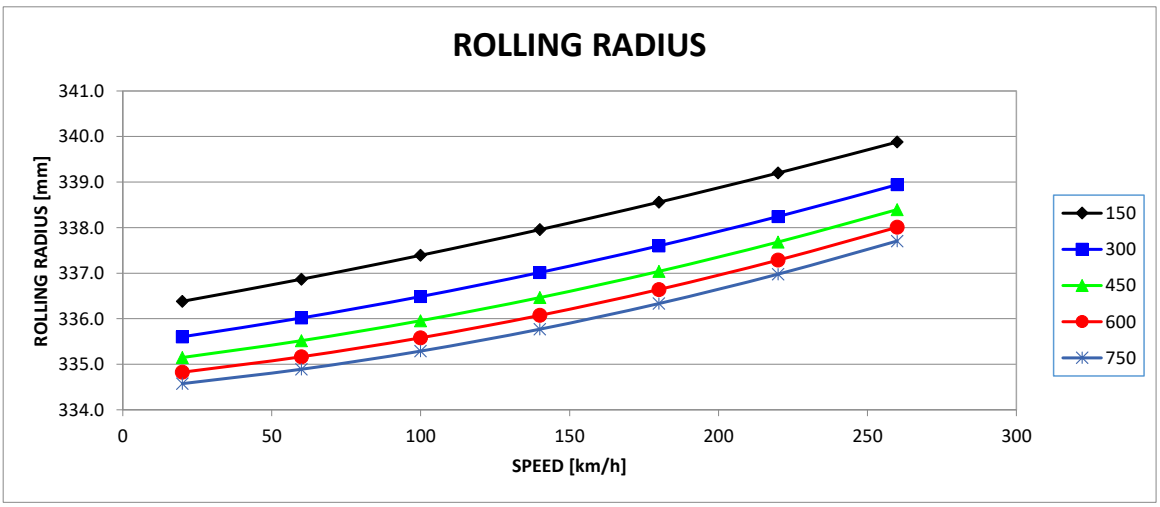

DYNAMIC MEASUREMENTS @ 1.9bar (27.5psi), CA 0.0°

280/680-19x11J WH

LOADED RADIUS

SPEED [km/h] \ LOAD [kg]	150	300	450	600	750
20	337.5	332.3	327.4	322.7	318.2
60	337.8	332.8	327.9	323.2	318.8
100	338.3	333.3	328.5	323.9	319.5
140	338.9	334.0	329.3	324.8	320.4
180	339.6	334.8	330.2	325.8	321.5
220	340.5	335.8	331.3	326.9	322.7
260	341.4	336.9	332.5	328.2	324.1

ROLLING RADIUS

SPEED [km/h] \ LOAD [kg]	150	300	450	600	750
20	336.6	335.0	334.1	333.5	333.0
60	336.7	335.1	334.2	333.6	333.1
100	337.0	335.4	334.5	333.9	333.4
140	337.4	335.8	334.9	334.3	333.8
180	338.0	336.4	335.5	334.8	334.3
220	338.8	337.1	336.2	335.5	335.0
260	339.7	338.0	337.0	336.4	335.8

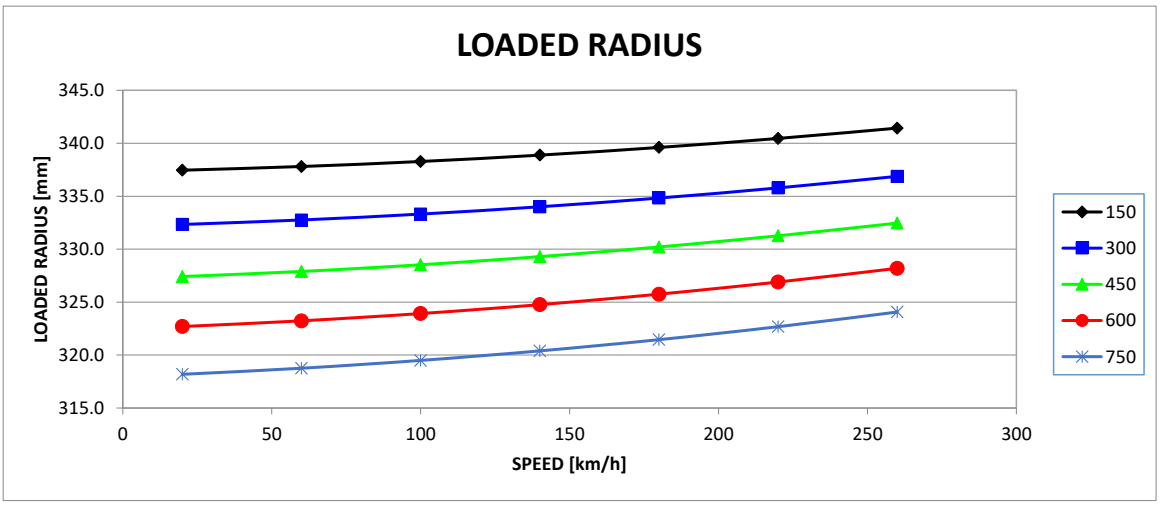

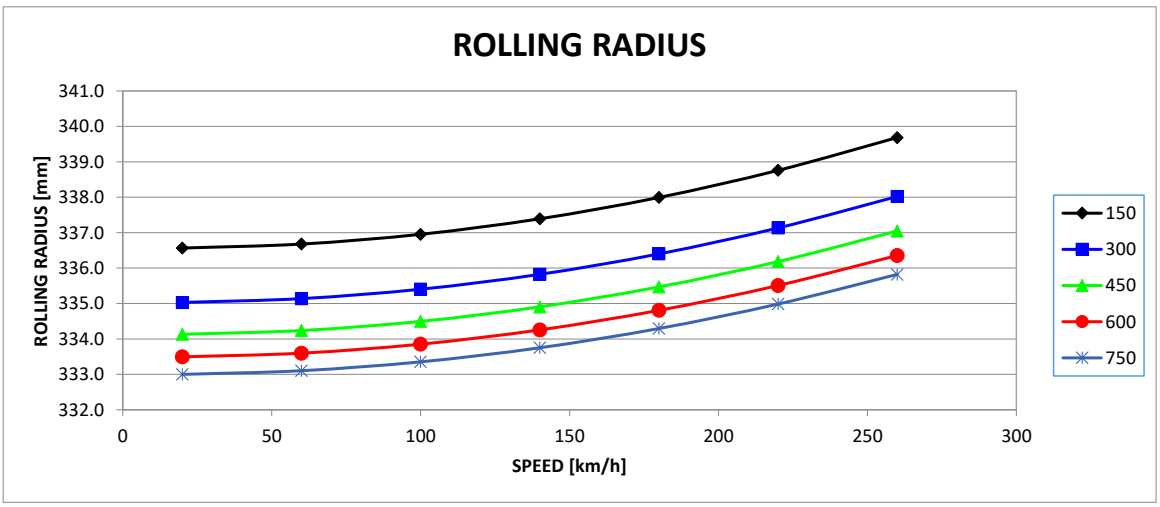

STATIC RADIAL DEFLECTION – 280/680-19x11J @ CA 0.0 ° DH

Load [kg]	Inflation Pressure [bar]						
	2.6	2.4	2.2	2.0	1.8	1.6	1.4
0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
25	0.7	0.8	0.8	0.9	1.0	1.0	1.1
50	1.5	1.6	1.6	1.7	1.9	2.0	2.2
75	2.2	2.4	2.4	2.6	2.8	3.0	3.3
100	2.9	3.1	3.2	3.4	3.7	4.0	4.4
125	3.6	3.9	4.0	4.2	4.6	4.9	5.4
150	4.3	4.6	4.8	5.1	5.5	5.9	6.4
175	5.0	5.3	5.5	5.9	6.4	6.8	7.4
200	5.7	6.0	6.3	6.6	7.2	7.7	8.4
225	6.3	6.7	7.0	7.4	8.0	8.6	9.4
250	7.0	7.4	7.7	8.2	8.9	9.5	10.4
275	7.6	8.1	8.5	8.9	9.7	10.4	11.3
300	8.3	8.8	9.2	9.7	10.5	11.3	12.3
325	8.9	9.4	9.9	10.4	11.3	12.1	13.2
350	9.6	10.1	10.6	11.2	12.1	13.0	14.1
375	10.2	10.7	11.3	11.9	12.8	13.8	15.0
400	10.8	11.4	11.9	12.6	13.6	14.6	15.9
425	11.4	12.0	12.6	13.3	14.3	15.5	16.8
450	12.0	12.6	13.3	14.0	15.1	16.3	17.6
475	12.6	13.3	13.9	14.7	15.8	17.1	18.5
500	13.2	13.9	14.6	15.4	16.6	17.9	19.4
525	13.8	14.5	15.2	16.1	17.3	18.6	20.2
550	14.4	15.1	15.9	16.7	18.0	19.4	21.0
575	15.0	15.7	16.5	17.4	18.7	20.2	21.9
600	15.6	16.3	17.1	18.0	19.4	21.0	22.7
625	16.2	16.8	17.7	18.7	20.1	21.7	23.5
650	16.7	17.4	18.4	19.3	20.8	22.5	24.3
675	17.3	18.0	19.0	20.0	21.5	23.2	25.1
700	17.9	18.6	19.6	20.6	22.1	23.9	25.9
725	18.4	19.1	20.2	21.2	22.8	24.7	26.6
750	19.0	19.7	20.8	21.9	23.4	25.4	27.4
775	19.5	20.2	21.4	22.5	24.1	26.1	28.2
800	20.0	20.8	21.9	23.1	24.7	26.8	28.9

STATIC RADIAL DEFLECTION – 280/680-19x11J @ CA 0.0° DH

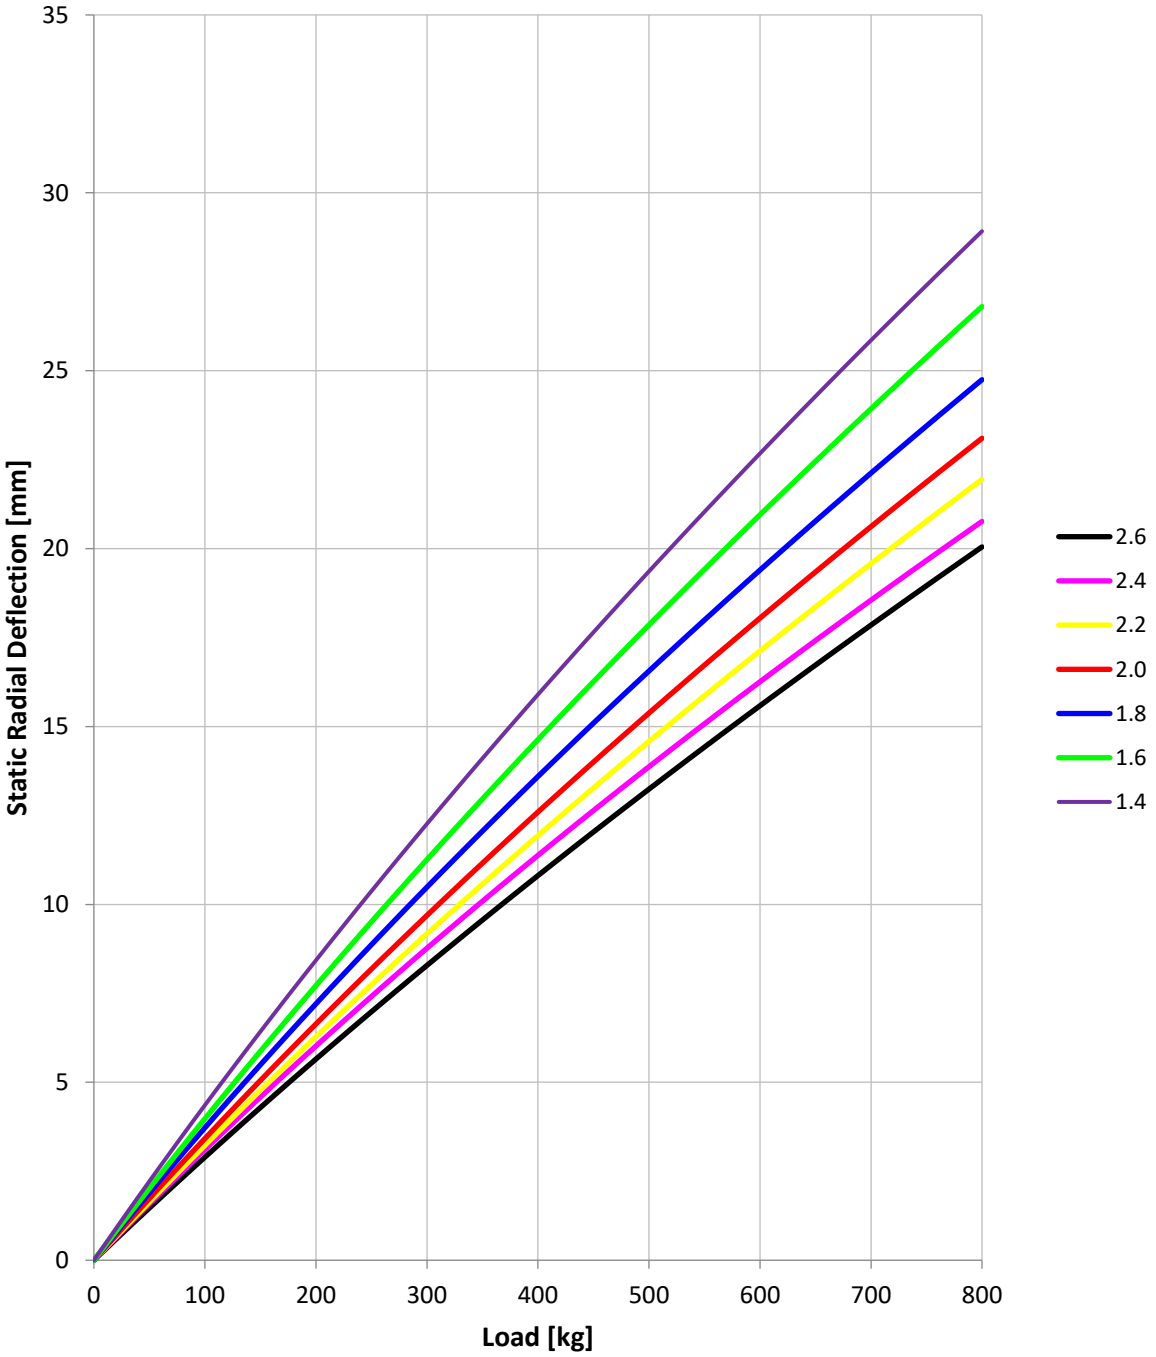

STATIC RADIAL DEFLECTION – 280/680-19x11J @ CA 3.0 ° DH

Load [kg]	Inflation Pressure [bar]						
	2.6	2.4	2.2	2.0	1.8	1.6	1.4
0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
25	0.9	1.0	1.0	1.1	1.1	1.2	1.3
50	1.8	1.9	2.0	2.1	2.2	2.4	2.6
75	2.7	2.8	3.0	3.2	3.3	3.6	3.8
100	3.5	3.7	3.9	4.2	4.3	4.7	5.0
125	4.3	4.5	4.8	5.1	5.3	5.8	6.2
150	5.1	5.4	5.7	6.1	6.3	6.8	7.4
175	5.9	6.2	6.6	7.0	7.3	7.9	8.5
200	6.7	7.0	7.4	7.9	8.2	8.9	9.6
225	7.4	7.8	8.3	8.8	9.2	9.9	10.7
250	8.2	8.5	9.1	9.7	10.1	10.9	11.7
275	8.9	9.3	9.9	10.5	11.0	11.9	12.8
300	9.6	10.0	10.6	11.4	11.9	12.8	13.8
325	10.3	10.7	11.4	12.2	12.7	13.7	14.8
350	11.0	11.4	12.2	13.0	13.6	14.6	15.8
375	11.7	12.2	12.9	13.8	14.4	15.5	16.8
400	12.3	12.8	13.6	14.5	15.3	16.4	17.7
425	13.0	13.5	14.4	15.3	16.1	17.3	18.7
450	13.6	14.2	15.1	16.1	16.9	18.1	19.6
475	14.3	14.9	15.8	16.8	17.7	19.0	20.5
500	14.9	15.5	16.4	17.5	18.4	19.8	21.4
525	15.5	16.1	17.1	18.2	19.2	20.6	22.3
550	16.1	16.8	17.8	19.0	20.0	21.4	23.2
575	16.7	17.4	18.4	19.7	20.7	22.2	24.1
600	17.3	18.0	19.1	20.3	21.5	23.0	24.9
625	17.9	18.6	19.7	21.0	22.2	23.8	25.8
650	18.5	19.2	20.4	21.7	22.9	24.6	26.6
675	19.1	19.8	21.0	22.4	23.6	25.3	27.4
700	19.6	20.4	21.6	23.0	24.3	26.1	28.3
725	20.2	21.0	22.2	23.7	25.0	26.8	29.1
750	20.8	21.6	22.8	24.3	25.7	27.6	29.9
775	21.3	22.1	23.4	25.0	26.4	28.3	30.7
800	21.8	22.7	24.0	25.6	27.1	29.0	31.5

STATIC RADIAL DEFLECTION – 280/680-19x11J @ CA 3.0° DH

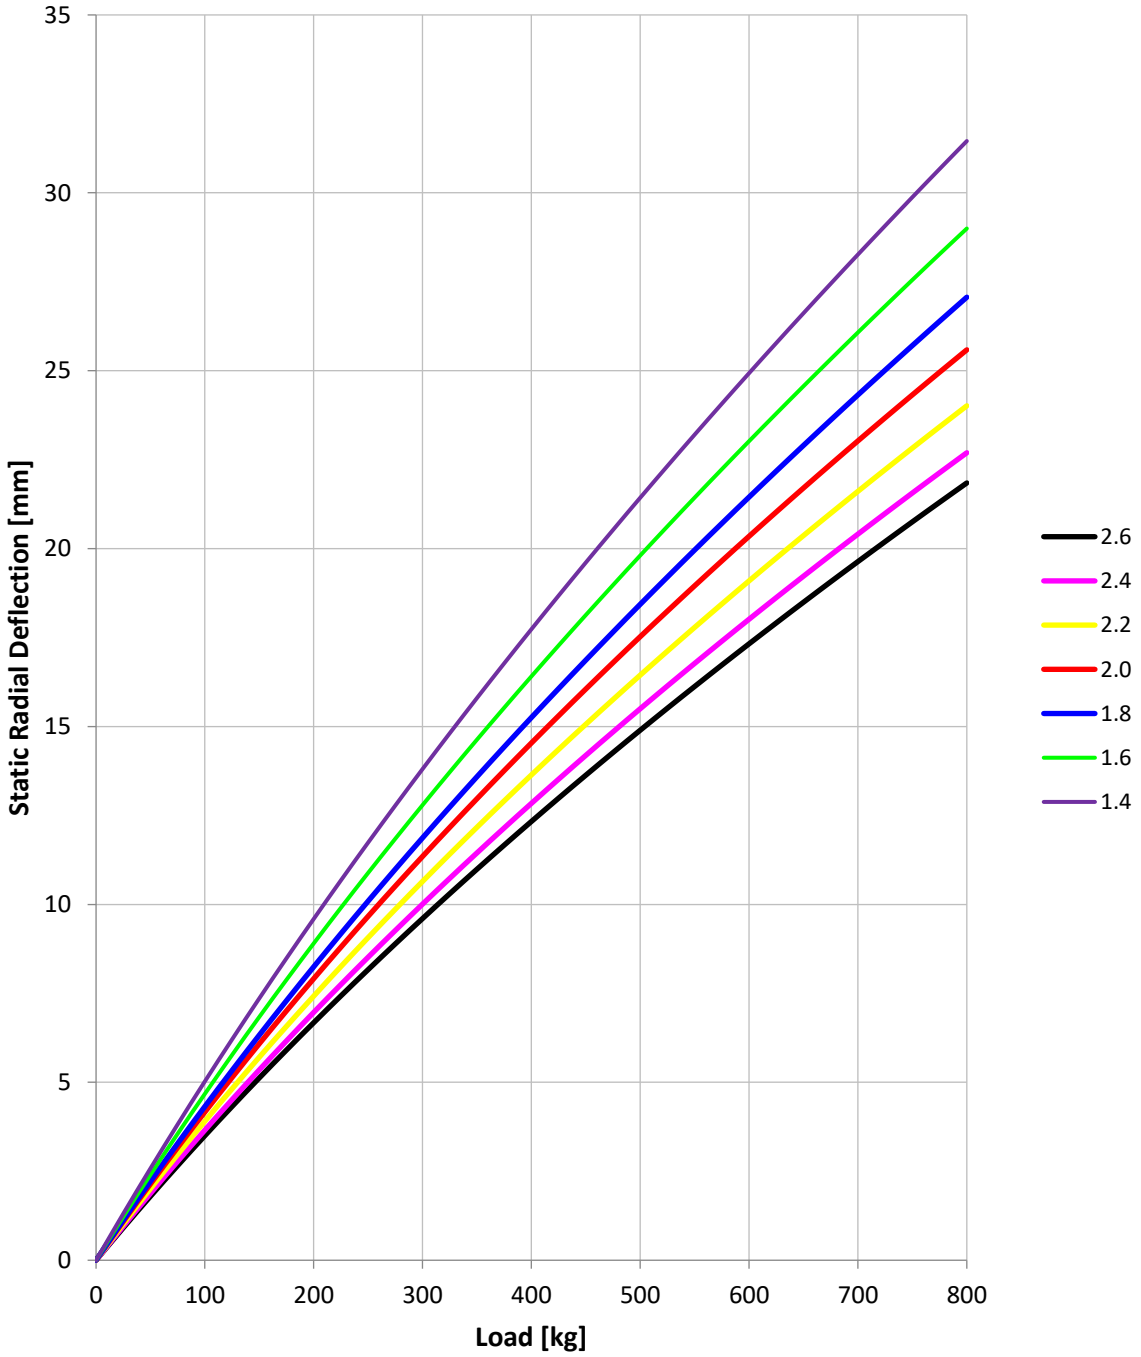

STATIC RADIAL DEFLECTION – 280/680-19x11J @ CA 0.0 ° WH

Load [kg]	Inflation Pressure [bar]						
	2.6	2.4	2.2	2.0	1.8	1.6	1.4
0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
25	0.7	0.7	0.8	0.8	0.9	1.0	1.1
50	1.4	1.5	1.6	1.7	1.8	1.9	2.1
75	2.1	2.2	2.4	2.5	2.7	2.9	3.2
100	2.8	2.9	3.1	3.3	3.6	3.8	4.2
125	3.5	3.7	3.9	4.1	4.5	4.8	5.3
150	4.2	4.4	4.7	4.9	5.3	5.7	6.3
175	4.8	5.1	5.4	5.7	6.2	6.6	7.3
200	5.5	5.8	6.1	6.5	7.0	7.5	8.3
225	6.1	6.4	6.8	7.2	7.9	8.4	9.2
250	6.8	7.1	7.6	8.0	8.7	9.3	10.2
275	7.4	7.8	8.3	8.7	9.5	10.2	11.2
300	8.1	8.5	9.0	9.5	10.3	11.0	12.1
325	8.7	9.1	9.7	10.2	11.1	11.9	13.0
350	9.3	9.8	10.4	10.9	11.9	12.7	14.0
375	9.9	10.4	11.0	11.7	12.7	13.6	14.9
400	10.6	11.1	11.7	12.4	13.4	14.4	15.8
425	11.2	11.7	12.4	13.1	14.2	15.2	16.7
450	11.8	12.4	13.0	13.8	15.0	16.1	17.6
475	12.4	13.0	13.7	14.5	15.7	16.9	18.5
500	13.0	13.6	14.3	15.2	16.4	17.7	19.3
525	13.6	14.2	15.0	15.9	17.2	18.5	20.2
550	14.1	14.9	15.6	16.5	17.9	19.3	21.1
575	14.7	15.5	16.2	17.2	18.6	20.1	21.9
600	15.3	16.1	16.9	17.9	19.3	20.8	22.8
625	15.9	16.7	17.5	18.6	20.1	21.6	23.6
650	16.4	17.3	18.1	19.2	20.8	22.4	24.4
675	17.0	17.9	18.7	19.9	21.5	23.1	25.3
700	17.6	18.4	19.3	20.5	22.2	23.9	26.1
725	18.1	19.0	19.9	21.2	22.8	24.6	26.9
750	18.7	19.6	20.5	21.8	23.5	25.4	27.7
775	19.2	20.2	21.1	22.4	24.2	26.1	28.5
800	19.8	20.8	21.7	23.1	24.9	26.9	29.3

STATIC RADIAL DEFLECTION – 280/680-19x11J @ CA 0.0° WH

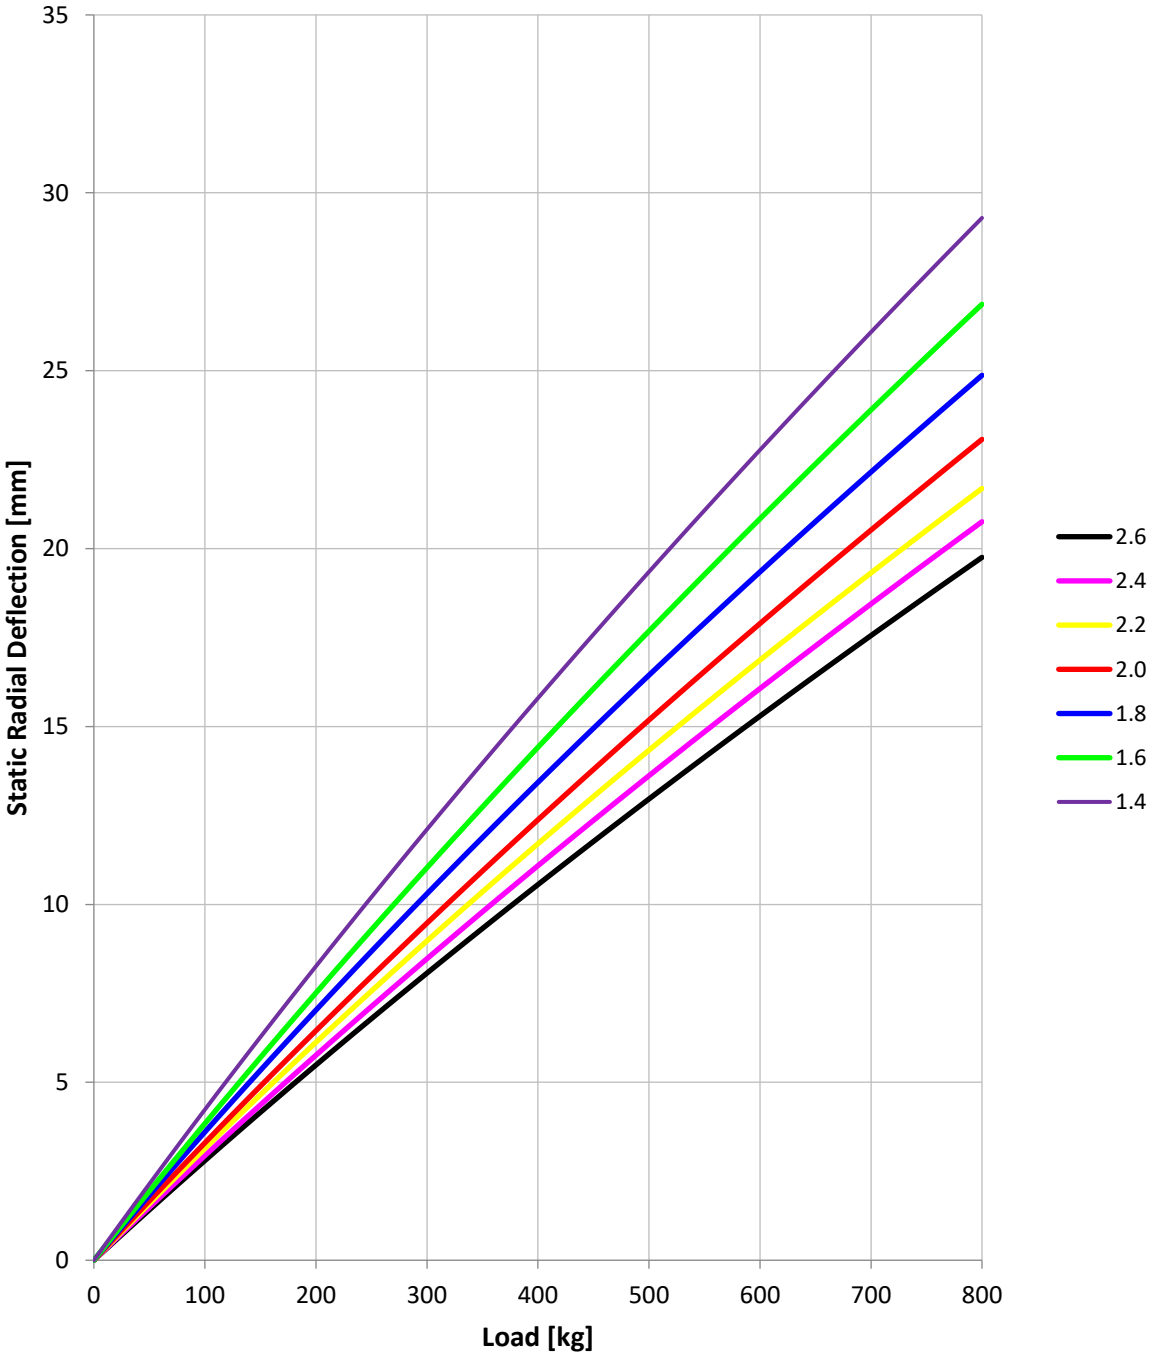

STATIC RADIAL DEFLECTION – 280/680-19x11J @ CA 3.0 ° WH

Load [kg]	Inflation Pressure [bar]						
	2.6	2.4	2.2	2.0	1.8	1.6	1.4
0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
25	0.9	0.9	0.9	1.0	1.0	1.1	1.2
50	1.7	1.7	1.8	1.9	2.1	2.2	2.4
75	2.5	2.5	2.7	2.9	3.1	3.3	3.6
100	3.3	3.4	3.6	3.8	4.0	4.4	4.7
125	4.1	4.2	4.4	4.7	5.0	5.4	5.9
150	4.9	5.0	5.3	5.6	5.9	6.4	7.0
175	5.6	5.7	6.1	6.4	6.9	7.4	8.1
200	6.4	6.5	6.9	7.3	7.8	8.4	9.1
225	7.1	7.2	7.7	8.1	8.7	9.4	10.2
250	7.8	8.0	8.5	8.9	9.6	10.3	11.2
275	8.5	8.7	9.2	9.8	10.5	11.3	12.2
300	9.2	9.4	10.0	10.6	11.3	12.2	13.2
325	9.9	10.1	10.7	11.3	12.2	13.1	14.2
350	10.6	10.8	11.5	12.1	13.0	14.0	15.2
375	11.2	11.5	12.2	12.9	13.8	14.9	16.2
400	11.9	12.2	12.9	13.7	14.6	15.7	17.1
425	12.5	12.9	13.6	14.4	15.5	16.6	18.0
450	13.2	13.6	14.3	15.1	16.3	17.5	19.0
475	13.8	14.2	15.0	15.9	17.0	18.3	19.9
500	14.4	14.9	15.7	16.6	17.8	19.1	20.8
525	15.0	15.5	16.4	17.3	18.6	20.0	21.6
550	15.6	16.1	17.1	18.0	19.4	20.8	22.5
575	16.2	16.8	17.7	18.7	20.1	21.6	23.4
600	16.8	17.4	18.4	19.4	20.9	22.4	24.2
625	17.4	18.0	19.0	20.1	21.6	23.1	25.1
650	18.0	18.6	19.7	20.8	22.3	23.9	25.9
675	18.6	19.2	20.3	21.4	23.0	24.7	26.8
700	19.1	19.8	21.0	22.1	23.8	25.5	27.6
725	19.7	20.4	21.6	22.8	24.5	26.2	28.4
750	20.2	21.0	22.2	23.4	25.2	27.0	29.2
775	20.8	21.5	22.8	24.1	25.9	27.7	30.0
800	21.3	22.1	23.4	24.7	26.6	28.4	30.8
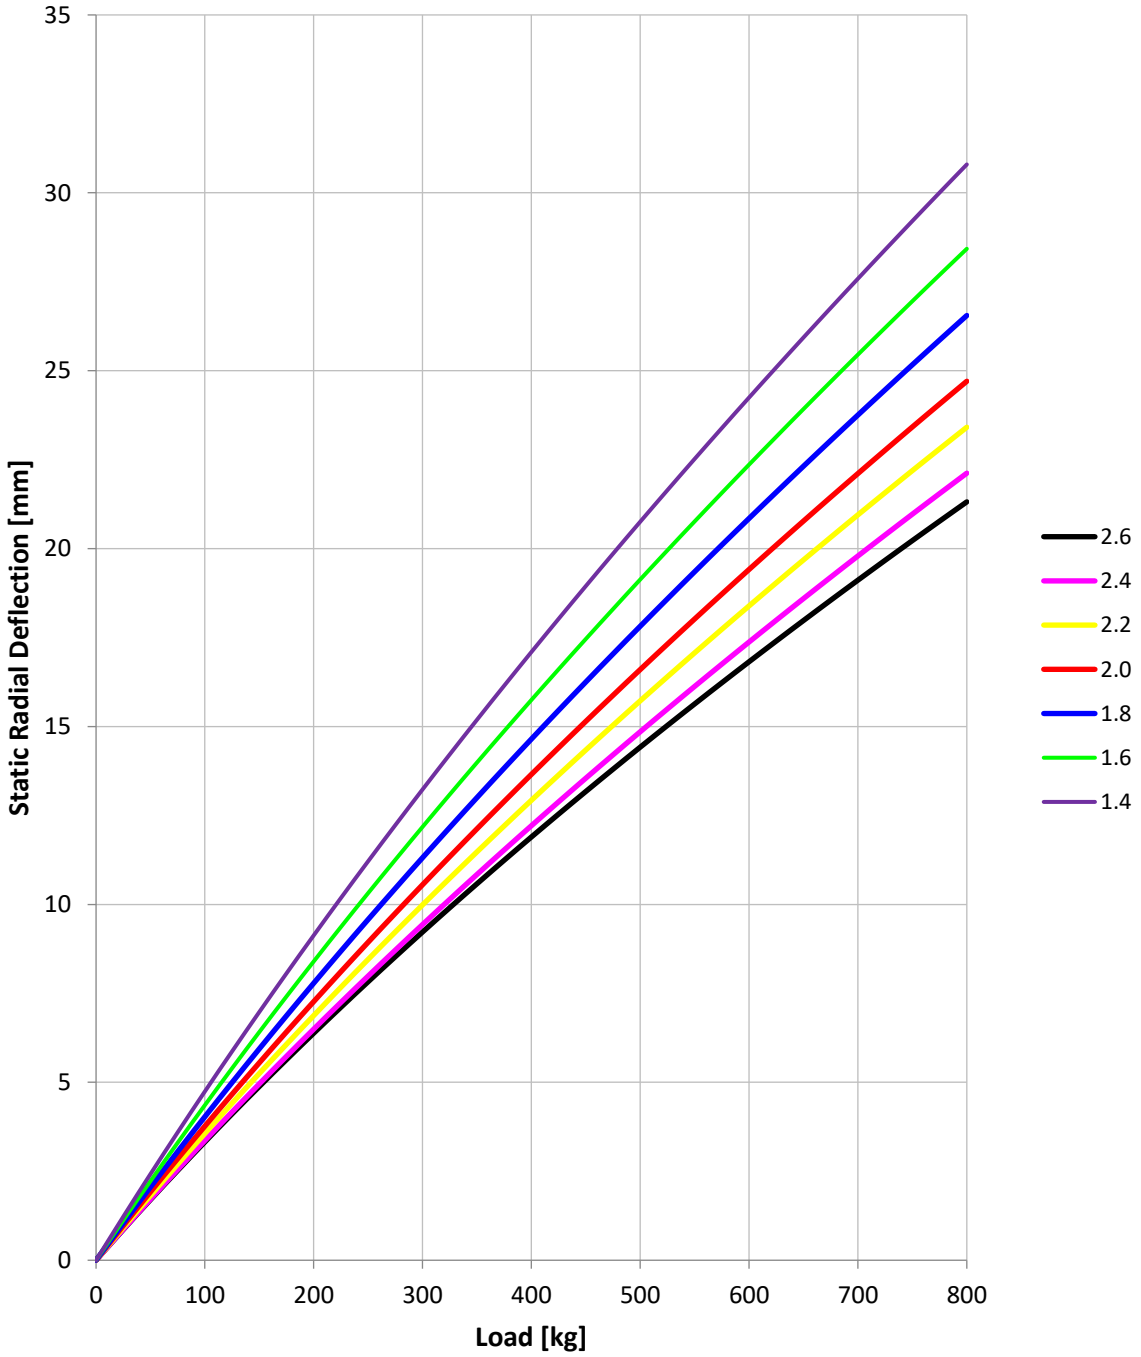
STATIC RADIAL DEFLECTION – 280/680-19x11J @ CA 3.0° WH