TYRE DATA BOOKLET

300/720-19 DH
300/720-19 WH
2024 - 2026

CONTENTS:

1: INTRODUCTION

2: STATIC DIMENSIONS (DH/WH)

3: DYNAMIC MEASUREMENTS (DH)

4: DYNAMIC MEASUREMENTS (WH)

5: STATIC RADIAL DEFLECTION (DH)

5: STATIC RADIAL DEFLECTION (WH)

INTRODUCTION

INTRODUCTION
This document provides the user with technical information regarding several aspects of the tyre characteristics. The data was acquired using indoor testing methods on physical tyres. For individual car fitments, usage guidelines and prescriptions for camber and pressure please refer to the relevent Pirelli Technical Booklet, which is included as part of this Pirelli Data Package.

STATIC DIMENSIONS

Slick Tyres				
Size & Fitment	Nominal Weight (kilograms)	Max Width **(C)** (mm)	Circumference **(πD)** (mm)	Tread Width **(Cb)** (mm)
300/720-19 DH 19"x12J	11.3	330	2246	299

Wet Tyres				
Size & Fitment	Nominal Weight (kilograms)	Max Width **(C)** (mm)	Circumference **(πD)** (mm)	Tread Width **(Cb)** (mm)
300/720-19 WH 19"x12J	13.2	330	2246	299

DYNAMIC MEASUREMENTS @ 1.9bar (27.5psi), CA 0.0°

300/720-19x12J DH

LOADED RADIUS

SPEED [km/h] \ LOAD [kg]	150	300	450	600	750
20	353.3	349.0	344.8	340.8	336.8
60	353.5	349.3	345.2	341.2	337.3
100	353.8	349.7	345.7	341.7	337.9
140	354.1	350.1	346.2	342.3	338.5
180	354.5	350.6	346.7	342.9	339.1
220	355.0	351.1	347.3	343.6	339.9
260	355.5	351.8	348.0	344.3	340.7

ROLLING RADIUS

SPEED [km/h] \ LOAD [kg]	150	300	450	600	750
20	351.4	350.7	350.3	350.0	349.8
60	351.5	350.8	350.4	350.1	349.9
100	351.7	351.0	350.6	350.3	350.1
140	352.0	351.3	350.8	350.5	350.3
180	352.3	351.6	351.2	350.9	350.6
220	352.8	352.0	351.6	351.2	351.0
260	353.3	352.5	352.0	351.7	351.4

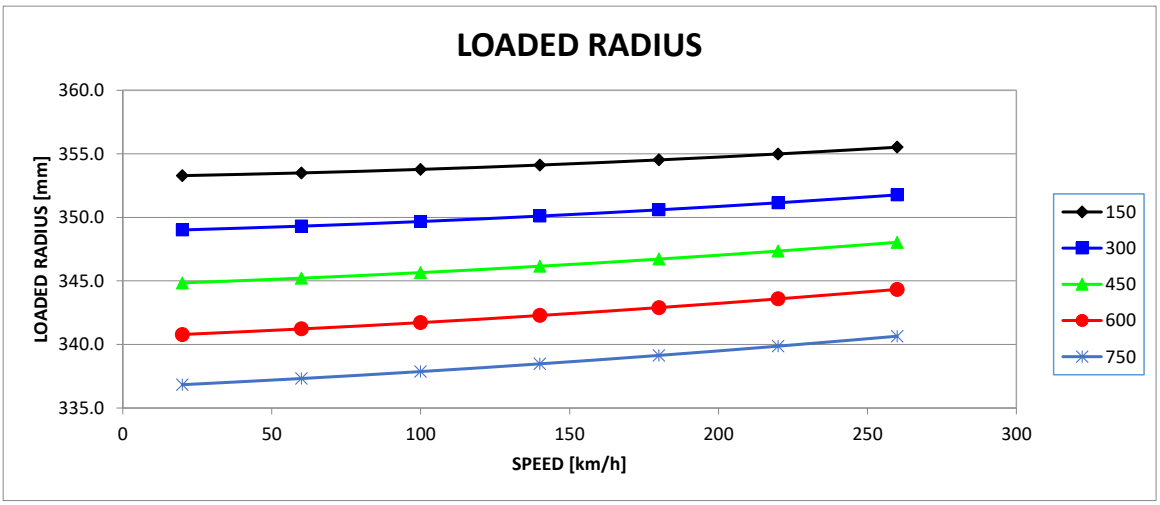

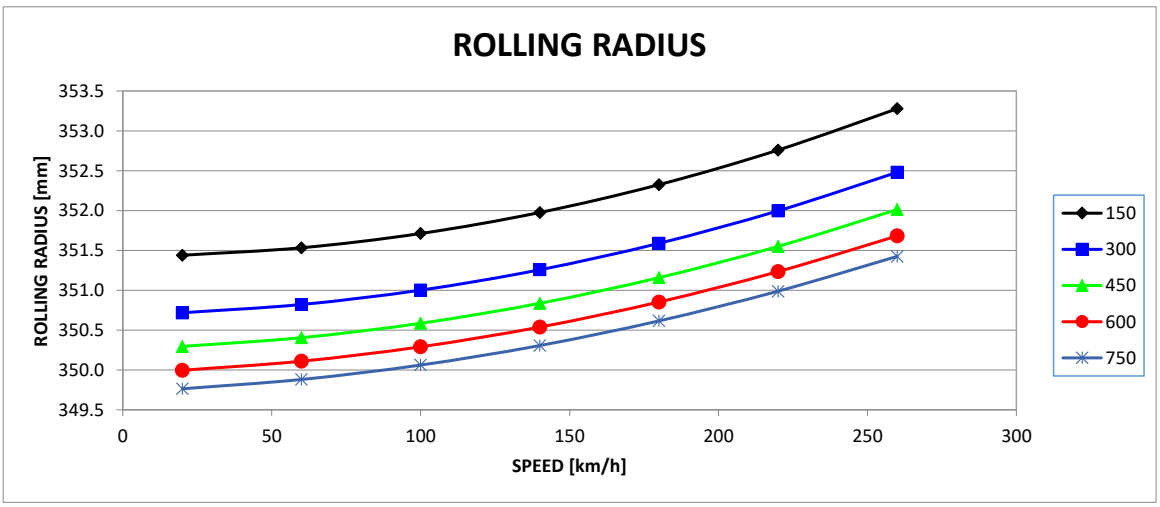

DYNAMIC MEASUREMENTS @ 1.9bar (27.5psi), CA 0.0°

300/720-19x12J WH

LOADED RADIUS

SPEED [km/h] \ LOAD [kg]	150	300	450	600	750
20	353.2	349.0	344.9	340.9	336.9
60	353.5	349.3	345.2	341.3	337.4
100	353.8	349.7	345.7	341.8	338.0
140	354.2	350.2	346.2	342.4	338.6
180	354.7	350.7	346.8	343.0	339.3
220	355.3	351.4	347.5	343.8	340.1
260	355.9	352.1	348.3	344.6	341.0

ROLLING RADIUS

SPEED [km/h] \ LOAD [kg]	150	300	450	600	750
20	351.4	349.9	349.1	348.5	348.0
60	351.4	349.9	349.1	348.5	348.0
100	351.5	350.1	349.2	348.6	348.2
140	351.8	350.3	349.5	348.9	348.4
180	352.2	350.7	349.8	349.2	348.7
220	352.7	351.2	350.3	349.7	349.2
260	353.3	351.8	350.9	350.2	349.7

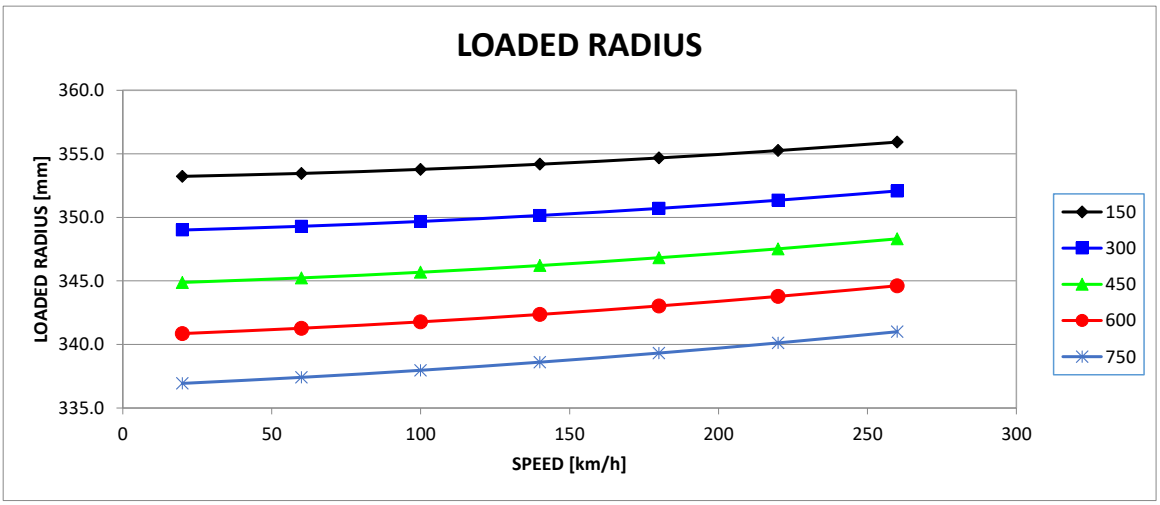

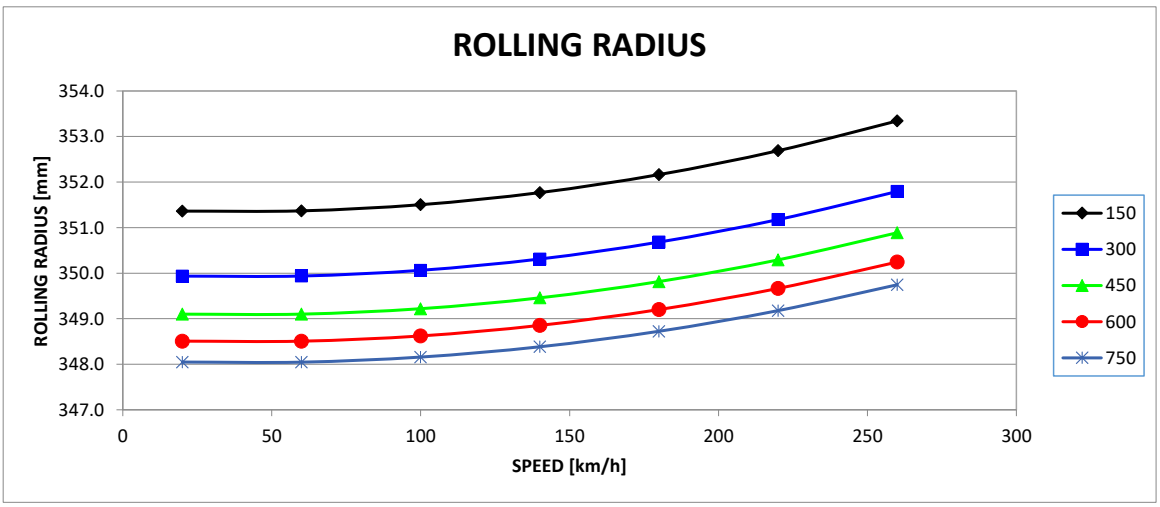

STATIC RADIAL DEFLECTION – 300/720-19x12J @ CA 0.0 ° DH

Load [kg]	Inflation Pressure [bar]						
	2.6	2.4	2.2	2.0	1.8	1.6	1.4
0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
25	0.6	0.7	0.7	0.8	0.8	0.9	1.0
50	1.3	1.4	1.4	1.5	1.6	1.7	1.9
75	1.9	2.0	2.2	2.2	2.4	2.6	2.8
100	2.5	2.7	2.8	3.0	3.2	3.4	3.7
125	3.1	3.3	3.5	3.7	3.9	4.3	4.6
150	3.7	4.0	4.2	4.4	4.7	5.1	5.5
175	4.3	4.6	4.9	5.1	5.5	5.9	6.4
200	4.9	5.2	5.5	5.8	6.2	6.7	7.3
225	5.5	5.8	6.2	6.4	6.9	7.5	8.1
250	6.1	6.4	6.8	7.1	7.7	8.3	9.0
275	6.6	7.0	7.4	7.8	8.4	9.0	9.8
300	7.2	7.6	8.0	8.5	9.1	9.8	10.7
325	7.7	8.2	8.6	9.1	9.8	10.5	11.5
350	8.3	8.8	9.2	9.7	10.5	11.3	12.3
375	8.8	9.4	9.8	10.4	11.2	12.0	13.1
400	9.4	9.9	10.4	11.0	11.8	12.8	13.9
425	9.9	10.5	11.0	11.6	12.5	13.5	14.7
450	10.4	11.0	11.6	12.3	13.2	14.2	15.5
475	10.9	11.6	12.1	12.9	13.8	14.9	16.2
500	11.4	12.1	12.7	13.5	14.5	15.6	17.0
525	11.9	12.6	13.2	14.1	15.1	16.3	17.8
550	12.4	13.2	13.8	14.7	15.8	17.0	18.5
575	12.9	13.7	14.3	15.3	16.4	17.7	19.3
600	13.4	14.2	14.8	15.9	17.0	18.4	20.0
625	13.9	14.7	15.4	16.5	17.7	19.0	20.7
650	14.4	15.2	15.9	17.0	18.3	19.7	21.5
675	14.9	15.7	16.4	17.6	18.9	20.4	22.2
700	15.3	16.2	16.9	18.2	19.5	21.0	22.9
725	15.8	16.7	17.4	18.7	20.1	21.7	23.6
750	16.3	17.2	18.0	19.3	20.7	22.3	24.3
775	16.7	17.7	18.5	19.9	21.3	22.9	25.0
800	17.2	18.2	19.0	20.4	21.9	23.6	25.7

STATIC RADIAL DEFLECTION – 300/720-19x12J @ CA 0.0° DH

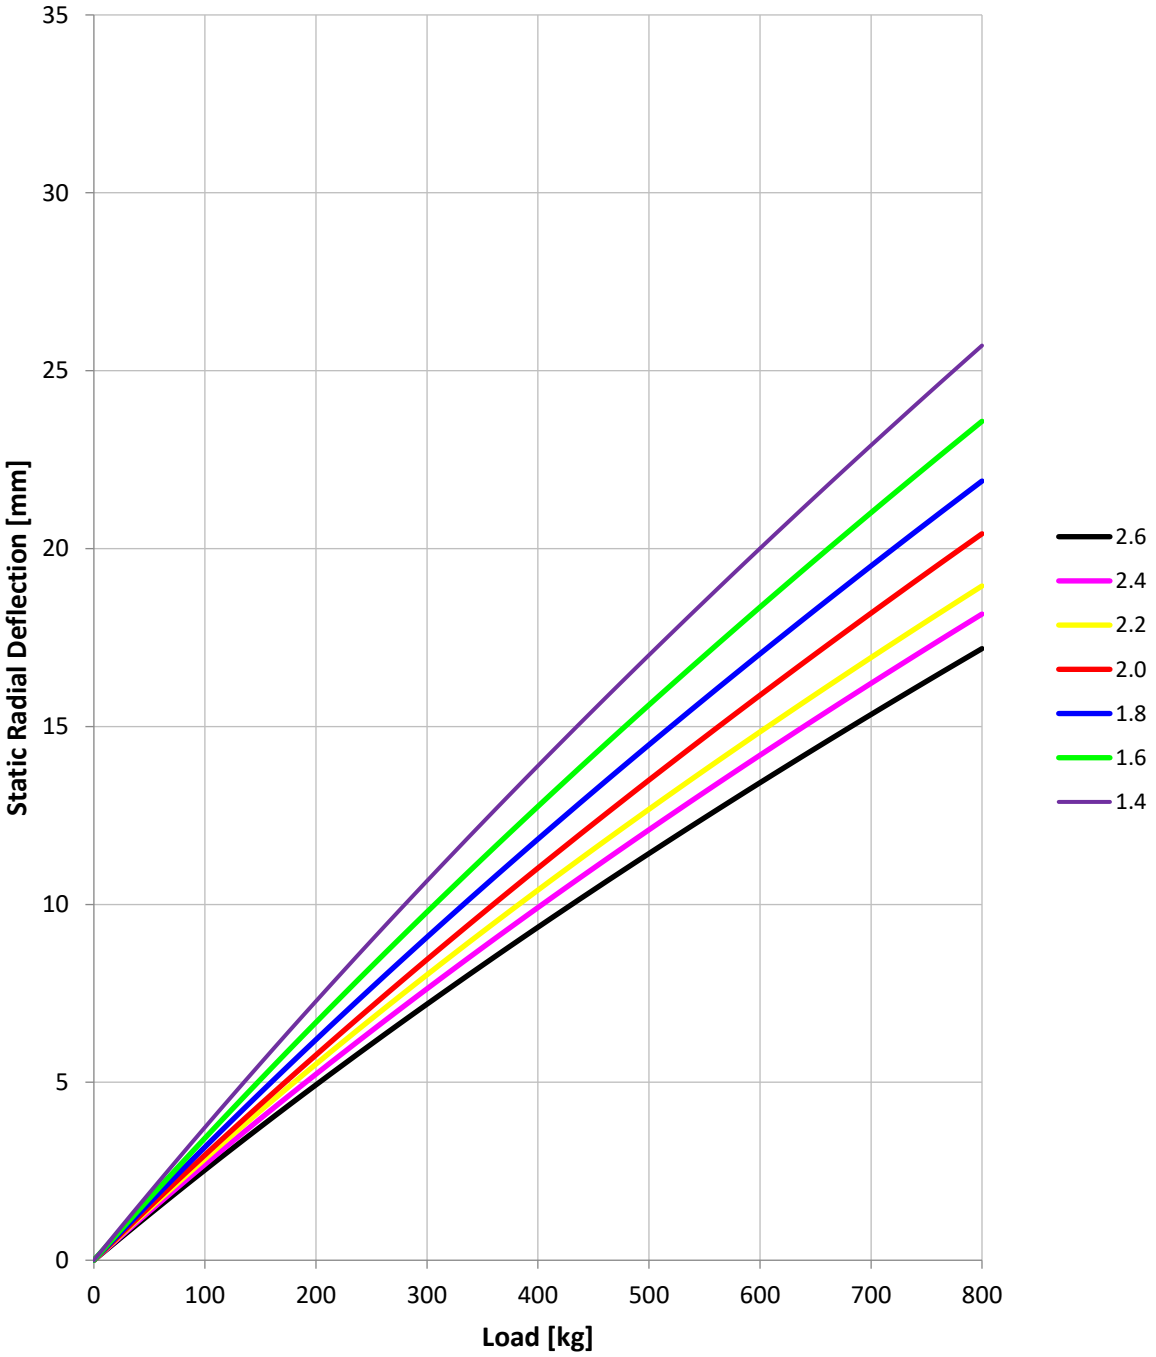

STATIC RADIAL DEFLECTION – 300/720-19x12J @ CA 3.0 ° DH

Load [kg]	Inflation Pressure [bar]						
	2.6	2.4	2.2	2.0	1.8	1.6	1.4
0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
25	0.8	0.8	0.9	0.9	1.0	1.0	1.1
50	1.5	1.6	1.7	1.8	1.9	2.0	2.2
75	2.3	2.4	2.6	2.6	2.8	3.0	3.2
100	3.0	3.1	3.4	3.5	3.7	4.0	4.3
125	3.7	3.9	4.2	4.3	4.6	4.9	5.3
150	4.4	4.6	4.9	5.1	5.4	5.8	6.3
175	5.0	5.3	5.7	5.9	6.3	6.7	7.3
200	5.7	6.0	6.4	6.6	7.1	7.6	8.2
225	6.3	6.7	7.2	7.4	7.9	8.5	9.2
250	7.0	7.3	7.9	8.2	8.7	9.4	10.1
275	7.6	8.0	8.6	8.9	9.5	10.2	11.0
300	8.2	8.6	9.2	9.6	10.2	11.0	11.9
325	8.8	9.3	9.9	10.3	11.0	11.9	12.8
350	9.4	9.9	10.6	11.0	11.8	12.7	13.7
375	10.0	10.5	11.2	11.7	12.5	13.5	14.5
400	10.6	11.1	11.9	12.4	13.2	14.3	15.4
425	11.2	11.7	12.5	13.1	13.9	15.0	16.2
450	11.7	12.3	13.1	13.7	14.6	15.8	17.1
475	12.3	12.9	13.7	14.4	15.3	16.5	17.9
500	12.8	13.4	14.3	15.0	16.0	17.3	18.7
525	13.4	14.0	14.9	15.6	16.7	18.0	19.5
550	13.9	14.6	15.5	16.3	17.4	18.8	20.3
575	14.4	15.1	16.1	16.9	18.0	19.5	21.1
600	14.9	15.6	16.6	17.5	18.7	20.2	21.9
625	15.5	16.2	17.2	18.1	19.3	20.9	22.6
650	16.0	16.7	17.8	18.7	20.0	21.6	23.4
675	16.5	17.2	18.3	19.3	20.6	22.3	24.2
700	17.0	17.7	18.9	19.9	21.2	23.0	24.9
725	17.5	18.3	19.4	20.5	21.8	23.6	25.6
750	17.9	18.8	19.9	21.0	22.4	24.3	26.4
775	18.4	19.3	20.4	21.6	23.0	25.0	27.1
800	18.9	19.8	21.0	22.2	23.6	25.6	27.8

STATIC RADIAL DEFLECTION – 300/720-19x12J @ CA 3.0° DH

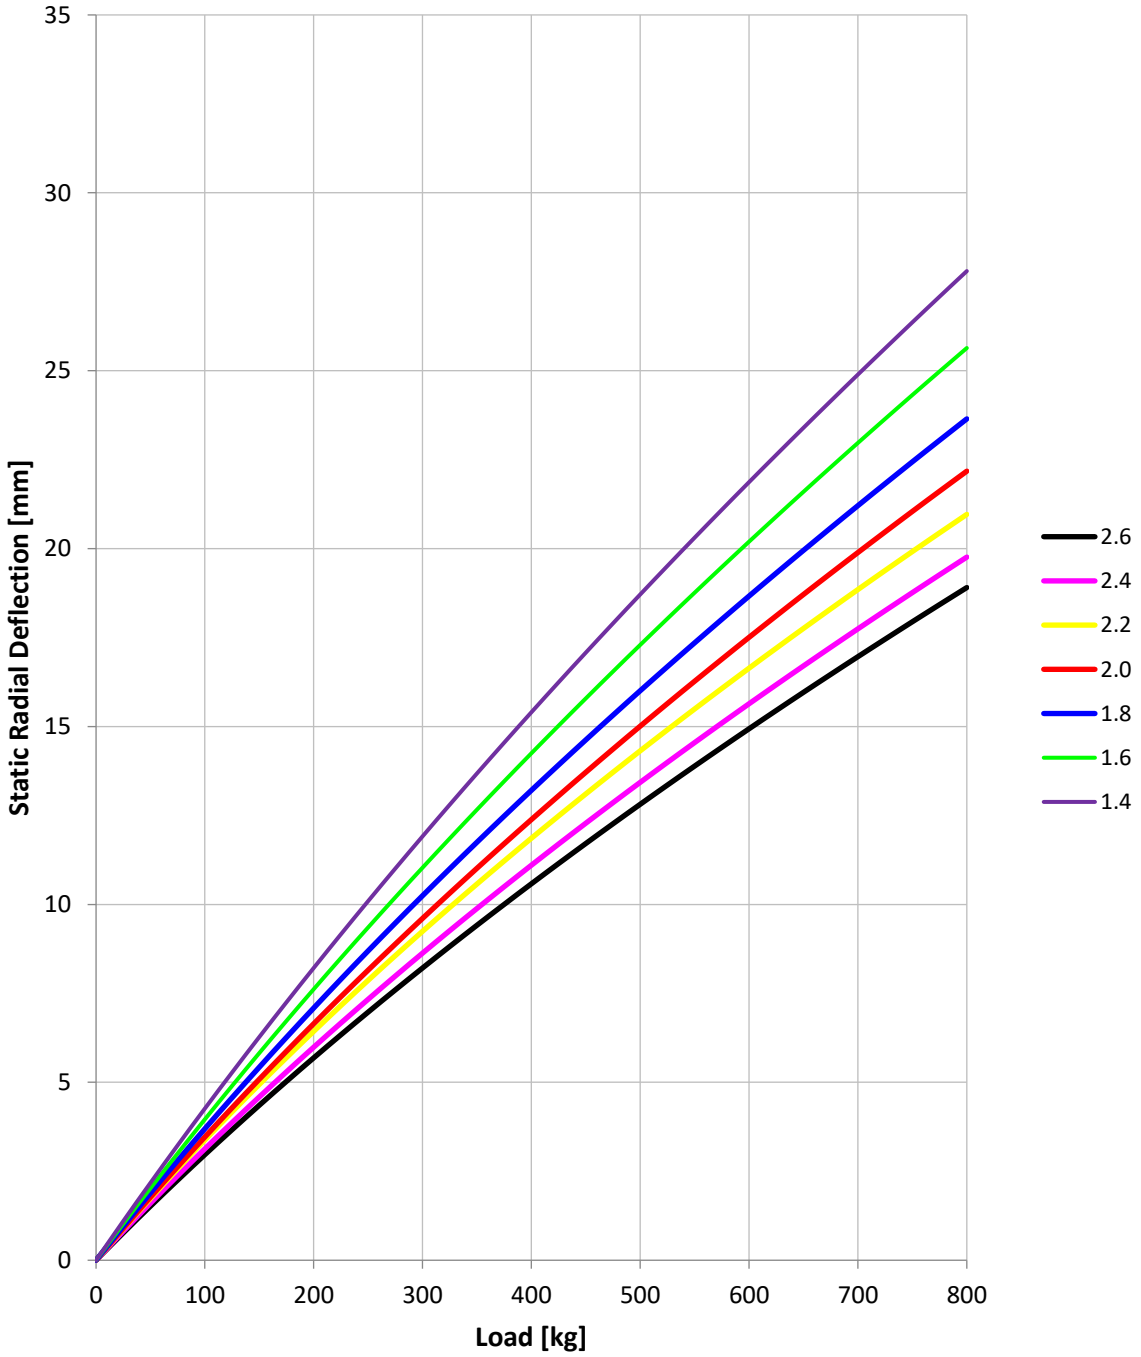

STATIC RADIAL DEFLECTION – 300/720-19x12J @ CA 0.0 ° WH

Load [kg]	Inflation Pressure [bar]						
	2.6	2.4	2.2	2.0	1.8	1.6	1.4
0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
25	0.7	0.7	0.7	0.8	0.8	0.9	0.9
50	1.3	1.4	1.4	1.5	1.6	1.7	1.9
75	1.9	2.0	2.1	2.3	2.4	2.6	2.8
100	2.5	2.7	2.8	3.0	3.2	3.4	3.7
125	3.2	3.4	3.5	3.7	3.9	4.2	4.6
150	3.8	4.0	4.2	4.4	4.7	5.0	5.5
175	4.4	4.6	4.8	5.1	5.4	5.8	6.3
200	4.9	5.2	5.5	5.8	6.2	6.6	7.2
225	5.5	5.9	6.1	6.5	6.9	7.4	8.0
250	6.1	6.5	6.8	7.2	7.6	8.2	8.9
275	6.7	7.1	7.4	7.8	8.3	8.9	9.7
300	7.2	7.6	8.0	8.5	9.0	9.7	10.5
325	7.8	8.2	8.6	9.1	9.7	10.4	11.3
350	8.3	8.8	9.2	9.8	10.4	11.2	12.1
375	8.9	9.4	9.8	10.4	11.1	11.9	12.9
400	9.4	9.9	10.4	11.0	11.8	12.6	13.7
425	9.9	10.5	11.0	11.7	12.4	13.3	14.4
450	10.5	11.0	11.6	12.3	13.1	14.0	15.2
475	11.0	11.6	12.1	12.9	13.7	14.7	15.9
500	11.5	12.1	12.7	13.5	14.4	15.4	16.7
525	12.0	12.6	13.3	14.1	15.0	16.1	17.4
550	12.5	13.2	13.8	14.7	15.7	16.8	18.2
575	13.0	13.7	14.4	15.3	16.3	17.5	18.9
600	13.5	14.2	14.9	15.9	16.9	18.2	19.6
625	14.0	14.7	15.4	16.4	17.5	18.8	20.3
650	14.5	15.2	16.0	17.0	18.2	19.5	21.0
675	14.9	15.7	16.5	17.6	18.8	20.1	21.7
700	15.4	16.2	17.0	18.1	19.4	20.8	22.4
725	15.9	16.7	17.6	18.7	20.0	21.4	23.1
750	16.4	17.2	18.1	19.2	20.6	22.1	23.8
775	16.8	17.7	18.6	19.8	21.1	22.7	24.5
800	17.3	18.2	19.1	20.3	21.7	23.3	25.2

STATIC RADIAL DEFLECTION – 300/720-19x12J @ CA 0.0° WH

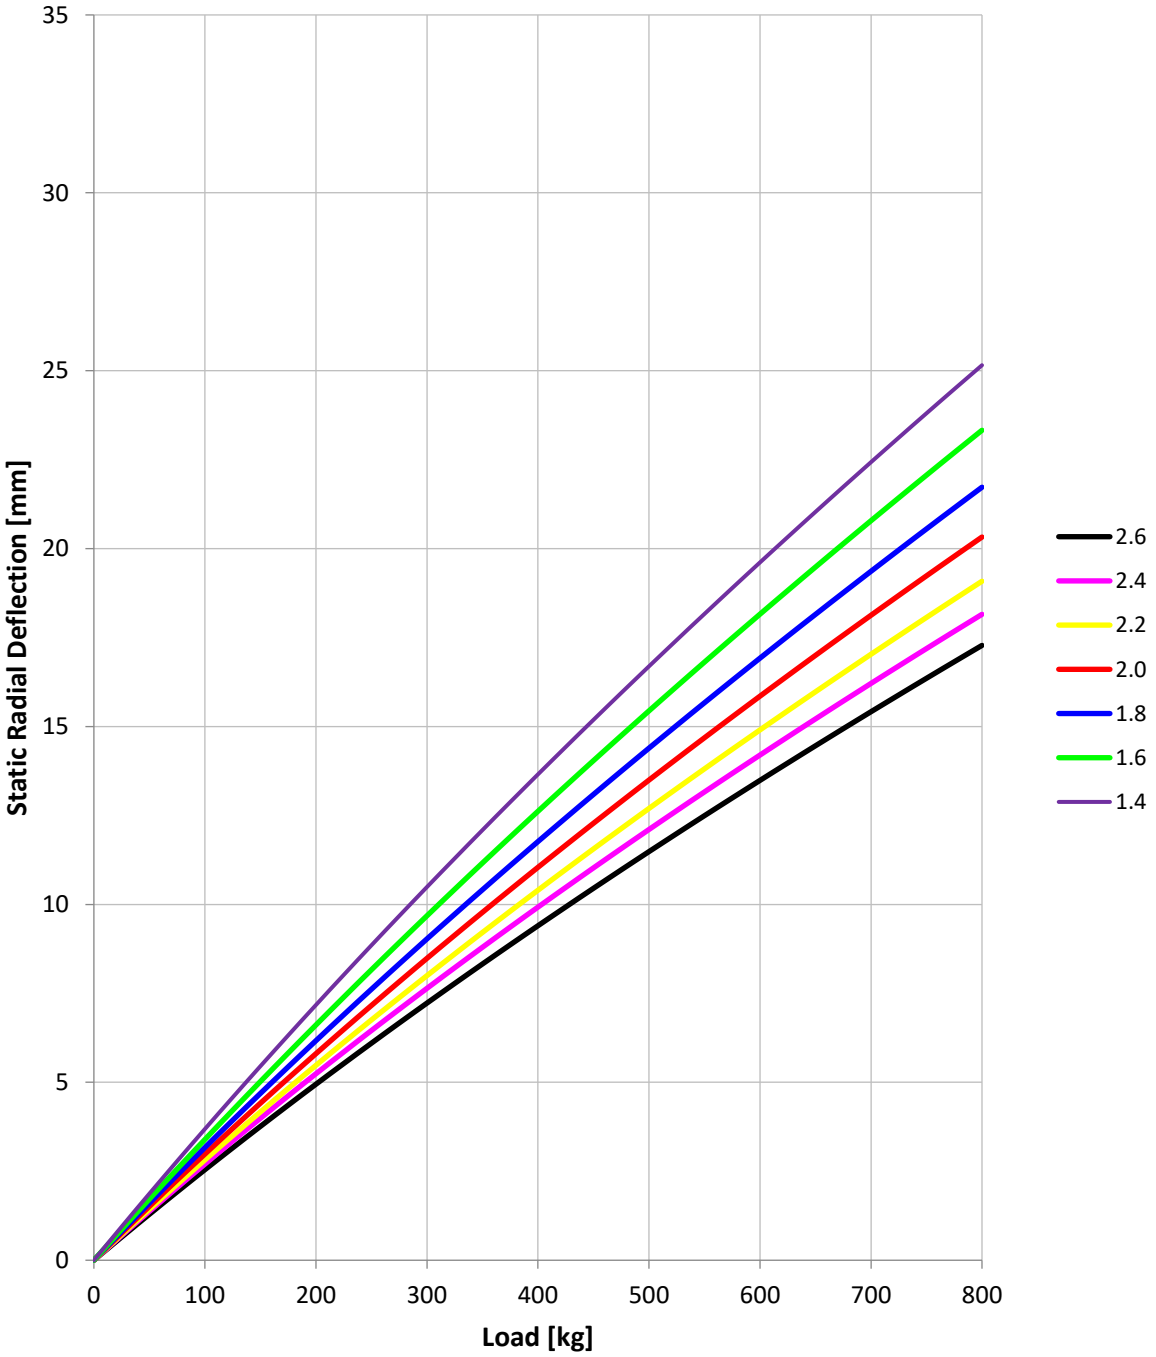

STATIC RADIAL DEFLECTION – 300/720-19x12J @ CA 3.0 ° WH

Load [kg]	Inflation Pressure [bar]						
	2.6	2.4	2.2	2.0	1.8	1.6	1.4
0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
25	0.7	0.8	0.8	0.8	0.9	1.0	1.0
50	1.4	1.5	1.6	1.7	1.8	1.9	2.1
75	2.1	2.3	2.4	2.5	2.6	2.9	3.1
100	2.8	3.0	3.2	3.3	3.5	3.8	4.1
125	3.4	3.7	3.9	4.0	4.3	4.7	5.1
150	4.1	4.4	4.6	4.8	5.2	5.6	6.0
175	4.7	5.1	5.4	5.6	6.0	6.4	7.0
200	5.4	5.7	6.1	6.3	6.8	7.3	7.9
225	6.0	6.4	6.8	7.0	7.6	8.2	8.8
250	6.6	7.0	7.5	7.8	8.3	9.0	9.7
275	7.2	7.7	8.1	8.5	9.1	9.8	10.6
300	7.8	8.3	8.8	9.2	9.8	10.6	11.5
325	8.4	8.9	9.5	9.9	10.6	11.4	12.4
350	9.0	9.5	10.1	10.6	11.3	12.2	13.2
375	9.6	10.1	10.7	11.3	12.0	13.0	14.1
400	10.2	10.7	11.4	11.9	12.8	13.8	14.9
425	10.7	11.3	12.0	12.6	13.5	14.5	15.7
450	11.3	11.9	12.6	13.2	14.2	15.3	16.5
475	11.8	12.5	13.2	13.9	14.9	16.0	17.4
500	12.4	13.0	13.8	14.5	15.5	16.8	18.2
525	12.9	13.6	14.4	15.2	16.2	17.5	18.9
550	13.4	14.2	15.0	15.8	16.9	18.2	19.7
575	14.0	14.7	15.6	16.4	17.6	18.9	20.5
600	14.5	15.2	16.1	17.0	18.2	19.6	21.3
625	15.0	15.8	16.7	17.7	18.9	20.3	22.0
650	15.5	16.3	17.3	18.3	19.5	21.0	22.8
675	16.0	16.8	17.8	18.9	20.1	21.7	23.5
700	16.5	17.3	18.4	19.5	20.8	22.4	24.2
725	17.0	17.9	18.9	20.0	21.4	23.0	25.0
750	17.5	18.4	19.5	20.6	22.0	23.7	25.7
775	18.0	18.9	20.0	21.2	22.6	24.3	26.4
800	18.5	19.4	20.5	21.8	23.2	25.0	27.1
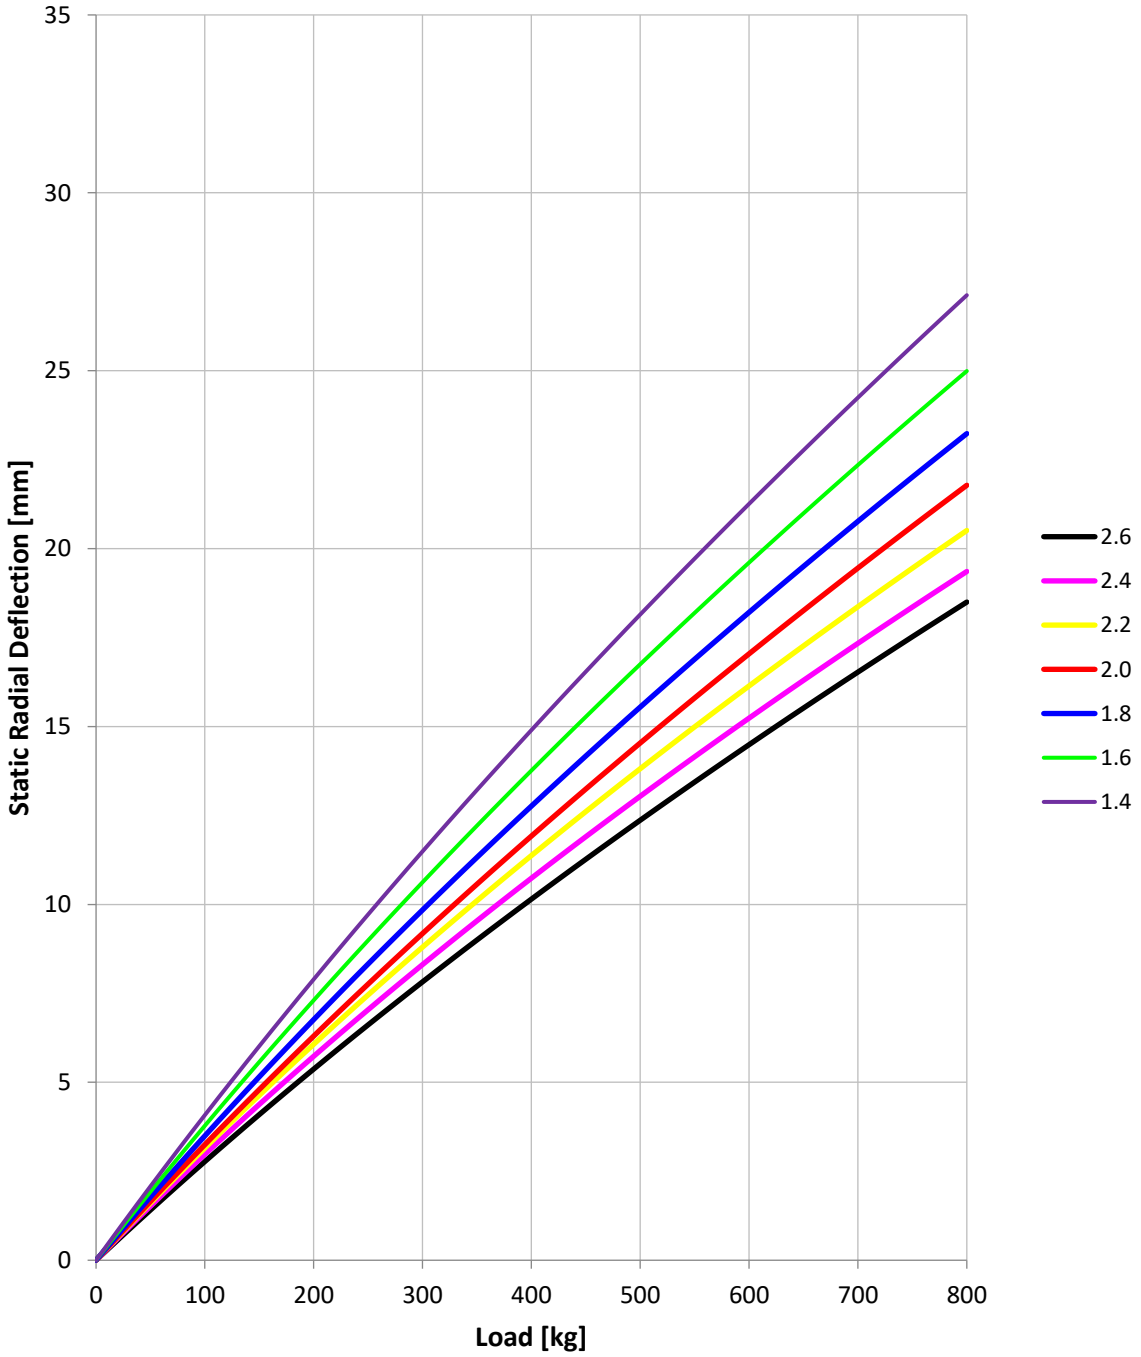
STATIC RADIAL DEFLECTION – 300/720-19x12J @ CA 3.0° WH