TYRE DATA BOOKLET

310/690-18 DHG
310/690-18 WHB
2025 - 2026

CONTENTS:

1: INTRODUCTION

2: STATIC DIMENSIONS (DHG/WHB)

3: DYNAMIC MEASUREMENTS (DHG)

4: DYNAMIC MEASUREMENTS (WHB)

5: STATIC RADIAL DEFLECTION (DHG)

6: STATIC RADIAL DEFLECTION (WHB)

INTRODUCTION

INTRODUCTION
This document provides the user with technical information regarding several aspects of the tyre characteristics. The data was acquired using indoor testing methods on physical tyres. For individual car fitments, usage guidelines and prescriptions for camber and pressure please refer to the relevent Pirelli Technical Booklet, which is included as part of this Pirelli Data Package.

STATIC MEASUREMENTS

Slick Tyres				
Size & Fitment	Nominal Weight (kilograms)	Max Width **(C)** (mm)	Circumference **(πD)** (mm)	Tread Width **(Cb)** (mm)
310/690-18 DHG 18"x12.5J	11.0	336	2151	300

Wet Tyres				
Size & Fitment	Nominal Weight (kilograms)	Max Width **(C)** (mm)	Circumference **(πD)** (mm)	Tread Width **(Cb)** (mm)
310/690-18 WHB 18"x12.0J	12.8	328	2155	298
310/690-18 WHB 18"x12.5J	12.8	334	2155	298

DYNAMIC MEASUREMENTS @ 2.0bar (29psi), CA 0.0°

310/690-18x12.5J DHG

LOADED RADIUS

SPEED [km/h] \ LOAD [kg]	150	300	450	600	750
20	337.3	332.9	328.6	324.2	319.8
60	337.5	333.2	328.9	324.5	320.1
100	337.7	333.4	329.2	324.9	320.6
140	337.9	333.8	329.6	325.4	321.1
180	338.2	334.1	330.0	325.8	321.6
220	338.5	334.5	330.5	326.4	322.3
260	338.9	335.0	331.0	327.0	322.9

ROLLING RADIUS

SPEED [km/h] \ LOAD [kg]	150	300	450	600	750
20	339.3	338.5	338.0	337.7	337.4
60	339.3	338.5	338.0	337.7	337.4
100	339.4	338.6	338.1	337.7	337.4
140	339.6	338.7	338.2	337.8	337.6
180	339.8	338.9	338.4	338.0	337.7
220	340.1	339.2	338.7	338.3	338.0
260	340.5	339.5	339.0	338.6	338.3

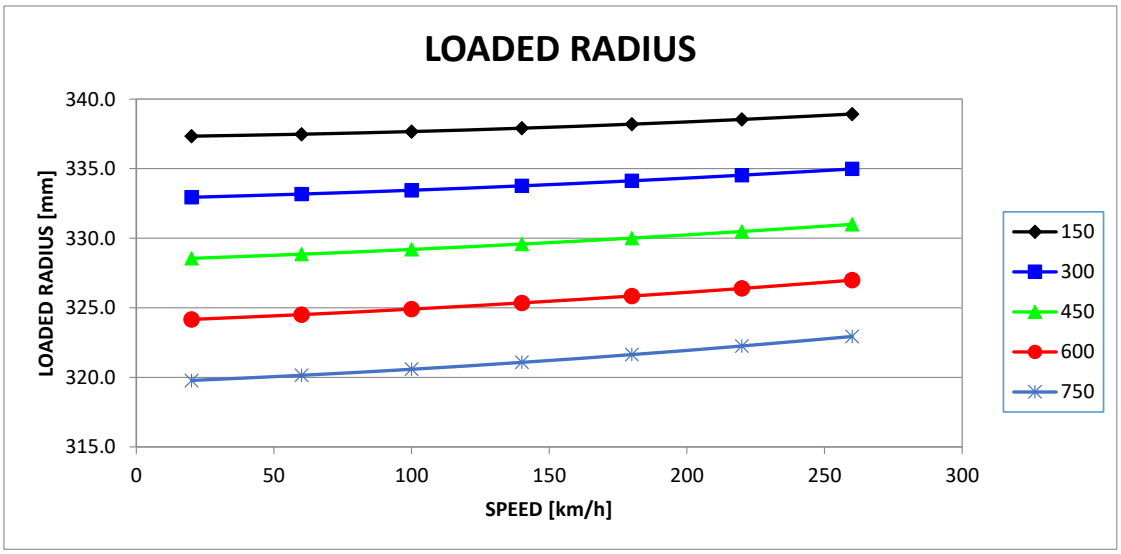

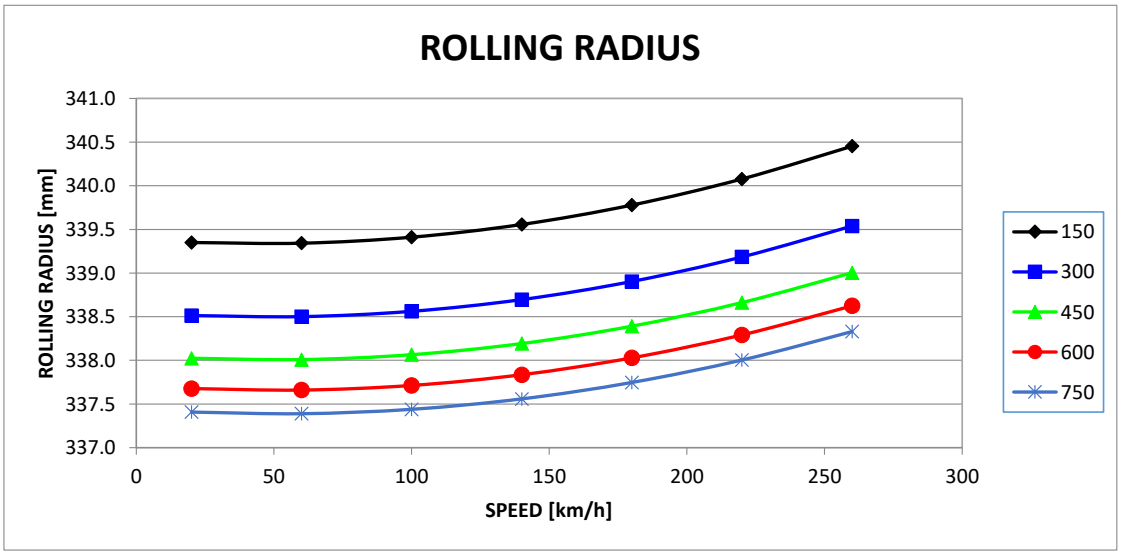

DYNAMIC MEASUREMENTS @ 1.8bar (26psi), CA 0.0°

310/690-18x12.5J DHG

LOADED RADIUS

SPEED [km/h] \ LOAD [kg]	150	300	450	600	750
20	336.9	332.0	327.2	322.3	317.6
60	337.0	332.3	327.5	322.8	318.0
100	337.2	332.6	327.9	323.2	318.5
140	337.5	333.0	328.4	323.7	319.0
180	337.8	333.3	328.9	324.3	319.7
220	338.1	333.8	329.4	324.9	320.4
260	338.6	334.3	329.9	325.6	321.2

ROLLING RADIUS

SPEED [km/h] \ LOAD [kg]	150	300	450	600	750
20	339.2	338.4	337.9	337.5	337.3
60	339.2	338.4	337.9	337.5	337.3
100	339.3	338.4	337.9	337.6	337.3
140	339.4	338.6	338.1	337.7	337.4
180	339.6	338.8	338.3	337.9	337.6
220	339.9	339.0	338.5	338.2	337.9
260	340.3	339.4	338.9	338.5	338.2

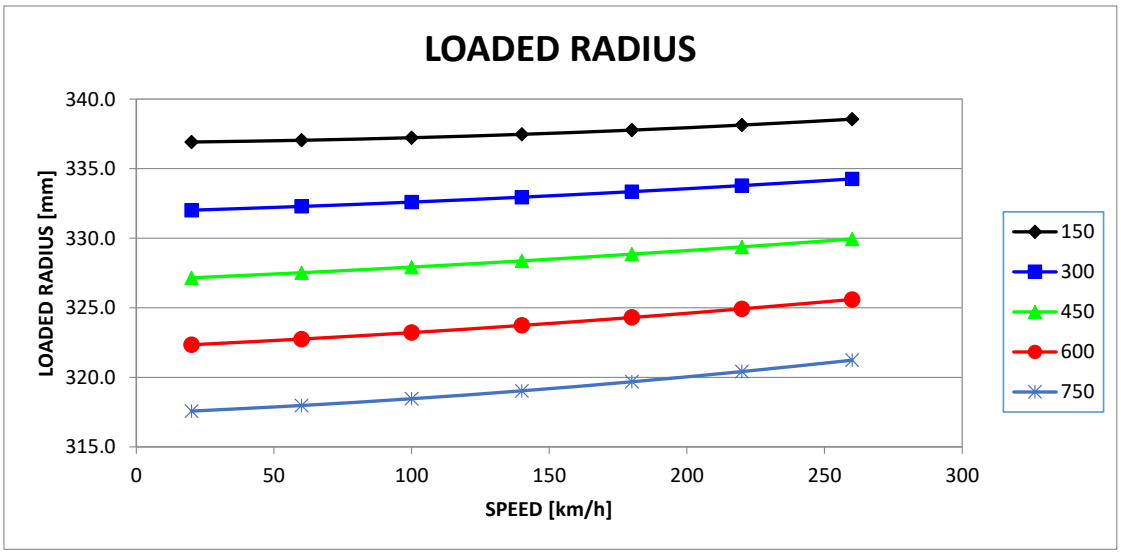

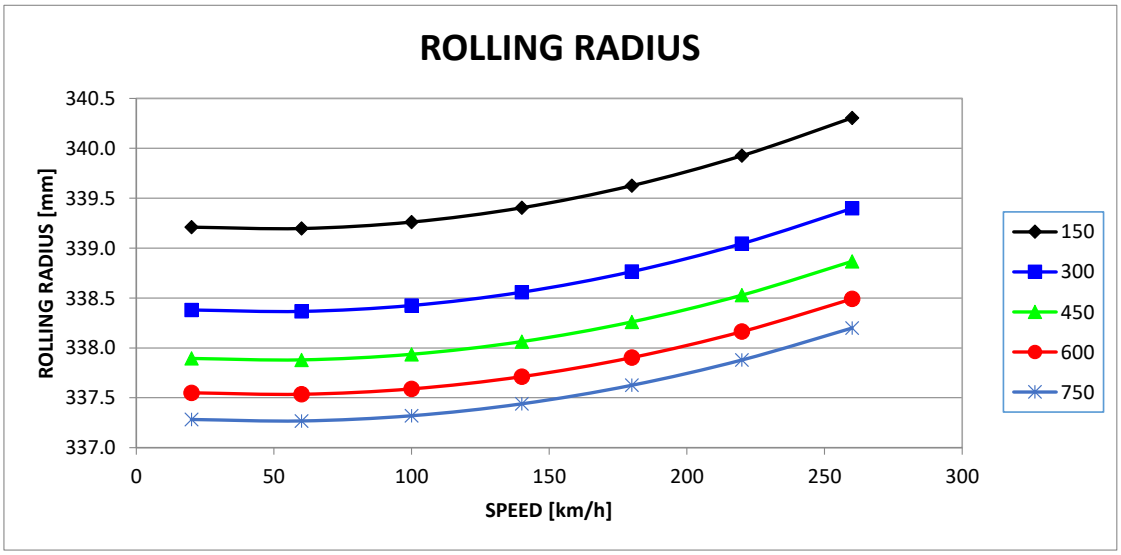

DYNAMIC MEASUREMENTS @ 2.0bar (29psi), CA 0.0°

310/690-18x12.0J WHB

LOADED RADIUS

LOAD [kg]

SPEED [km/h]	150	300	450	600	750
20	338.6	334.0	329.5	325.1	320.9
60	338.9	334.4	329.9	325.5	321.3
100	339.4	334.9	330.5	326.2	322.0
140	340.0	335.6	331.2	327.0	322.9
180	340.7	336.4	332.2	328.0	324.0
220	341.6	337.4	333.3	329.2	325.3
260	342.7	338.6	334.5	330.6	326.9
280					
300					

ROLLING RADIUS

LOAD [kg]

SPEED [km/h]	150	300	450	600	750
20	338.2	336.7	335.8	335.2	334.7
60	338.3	336.8	335.9	335.2	334.8
100	338.6	337.0	336.1	335.5	335.0
140	339.0	337.5	336.5	335.9	335.4
180	339.7	338.1	337.2	336.5	336.0
220	340.5	338.9	338.0	337.3	336.8
260	341.6	339.9	338.9	338.2	337.7
280					
300					

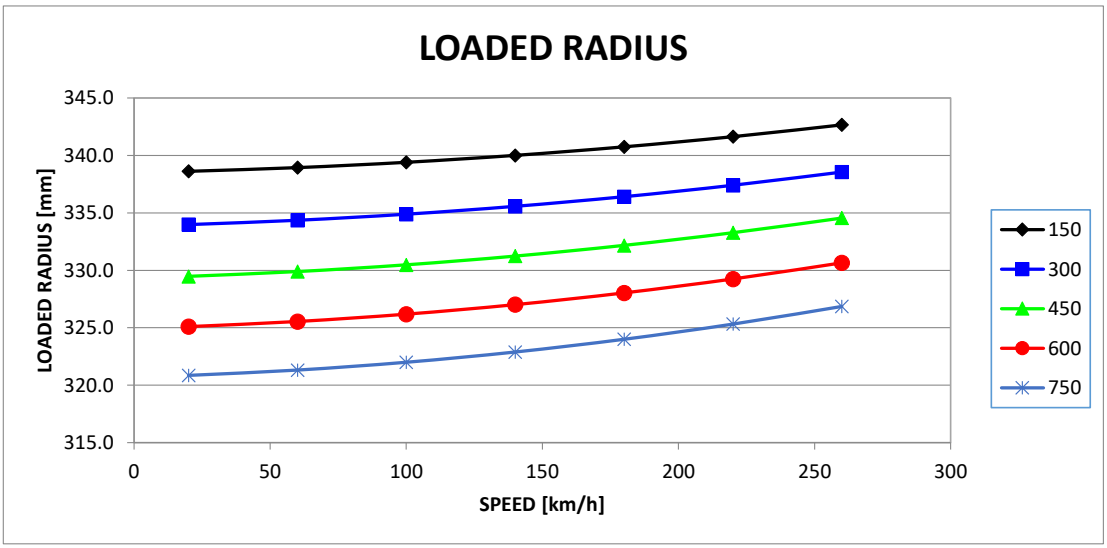

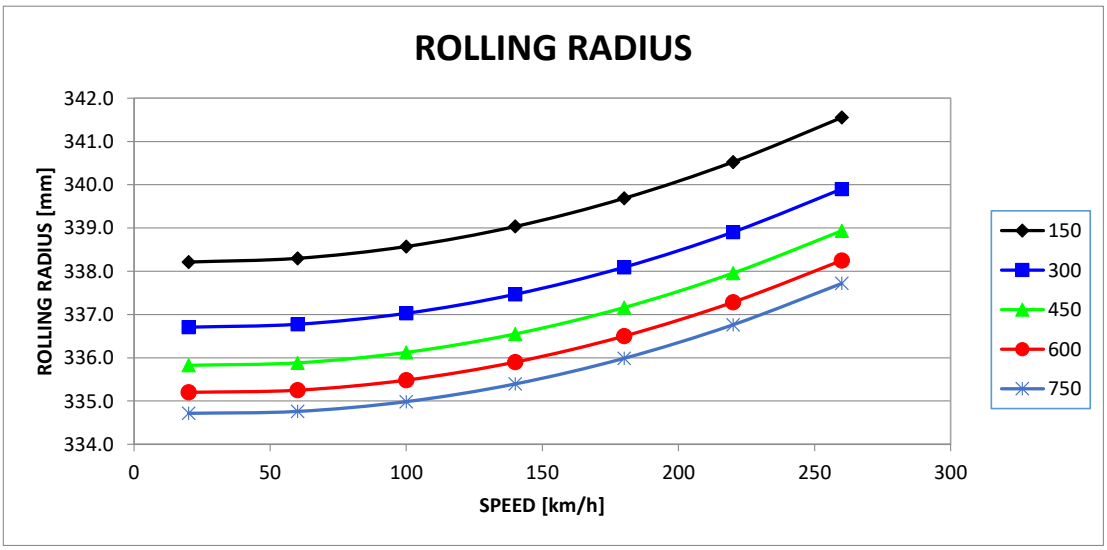

DYNAMIC MEASUREMENTS @ 1.8bar (26psi), CA 0.0°

310/690-18x12.0J WHB

LOADED RADIUS

SPEED [km/h] \ LOAD [kg]	150	300	450	600	750
20	338.3	333.2	328.2	323.4	318.7
60	338.6	333.6	328.7	323.9	319.2
100	339.1	334.2	329.3	324.6	320.0
140	339.8	334.9	330.2	325.5	321.0
180	340.6	335.8	331.2	326.6	322.2
220	341.5	336.9	332.4	327.9	323.6
260	342.6	338.1	333.7	329.4	325.2
280					
300					

ROLLING RADIUS

SPEED [km/h] \ LOAD [kg]	150	300	450	600	750
20	338.3	336.7	335.8	335.2	334.7
60	338.4	336.8	335.9	335.2	334.7
100	338.6	337.1	336.1	335.5	335.0
140	339.1	337.5	336.6	335.9	335.4
180	339.8	338.2	337.2	336.5	336.0
220	340.7	339.0	338.0	337.3	336.8
260	341.8	340.0	339.0	338.3	337.7
280					
300					

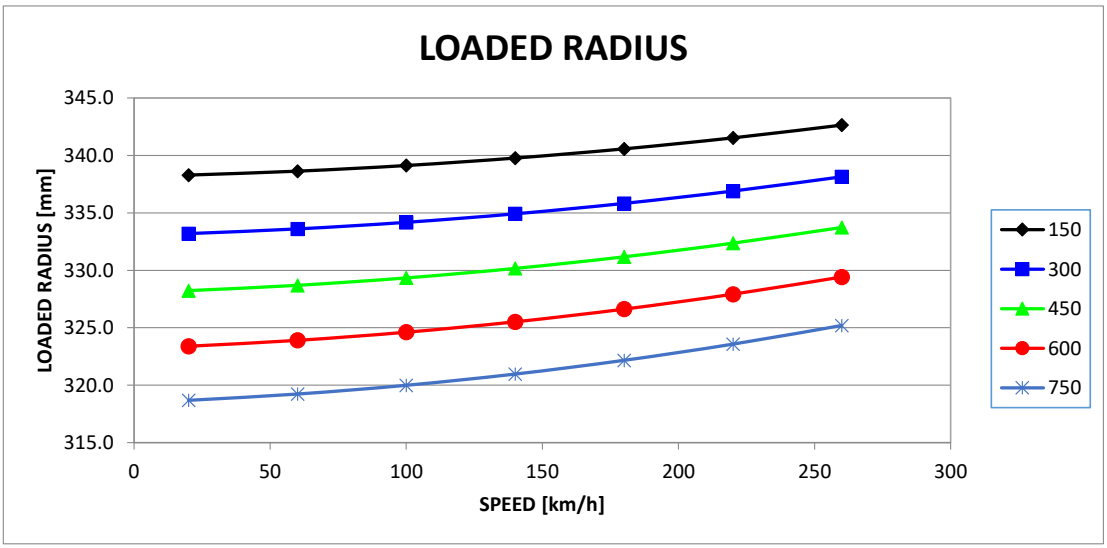

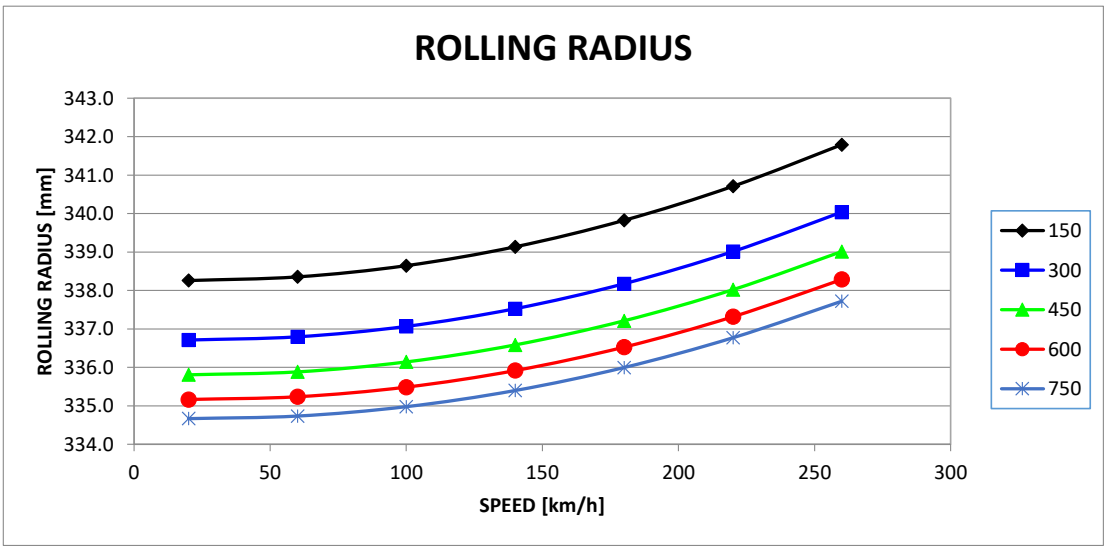

DYNAMIC MEASUREMENTS @ 2.0bar (29psi), CA 0.0°

310/690-18x12.5J WHB

LOADED RADIUS

SPEED [km/h] \ LOAD [kg]	150	300	450	600	750
20	338.4	333.8	329.3	325.0	320.8
60	338.7	334.1	329.7	325.4	321.3
100	339.1	334.6	330.3	326.1	322.0
140	339.7	335.3	331.0	326.9	322.8
180	340.4	336.1	331.9	327.9	323.9
220	341.3	337.1	333.0	329.0	325.2
260	342.3	338.2	334.2	330.4	326.7
280					
300					

ROLLING RADIUS

SPEED [km/h] \ LOAD [kg]	150	300	450	600	750
20	338.0	336.5	335.6	335.0	334.5
60	338.0	336.5	335.6	335.0	334.5
100	338.3	336.7	335.9	335.2	334.7
140	338.7	337.2	336.3	335.6	335.1
180	339.3	337.8	336.9	336.2	335.7
220	340.2	338.6	337.6	337.0	336.5
260	341.2	339.5	338.6	337.9	337.4
280					
300					

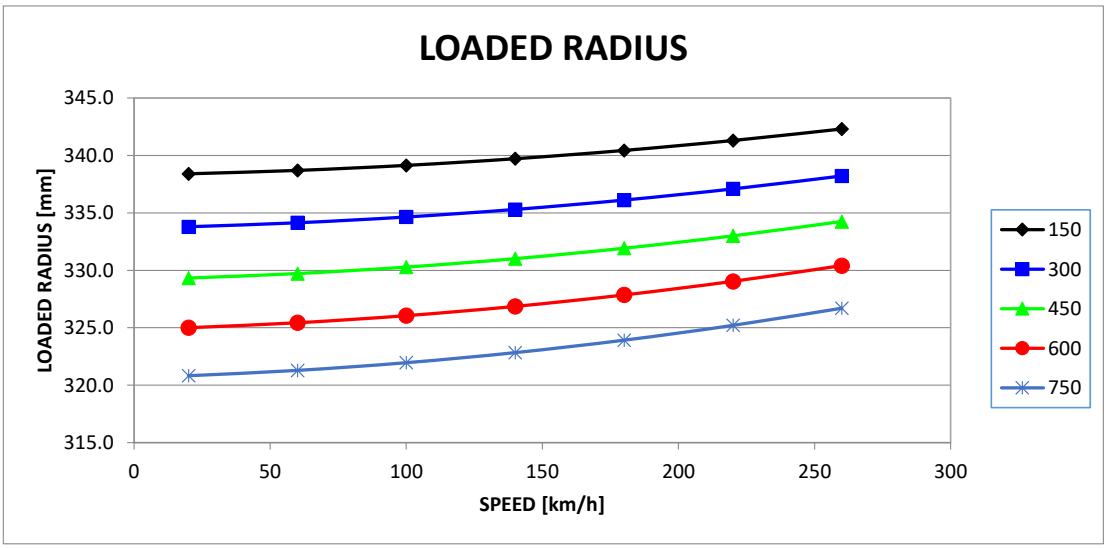

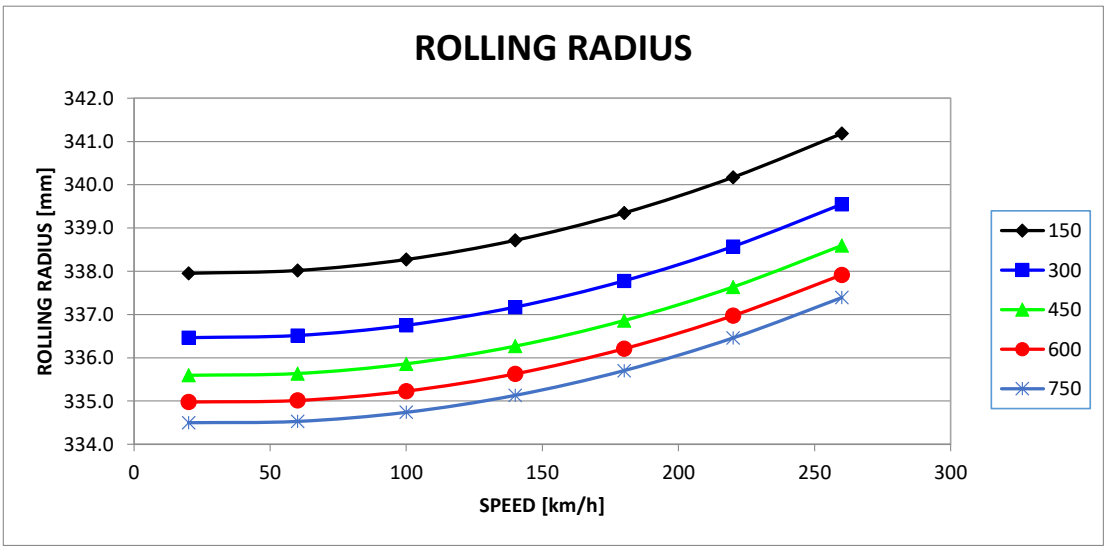

DYNAMIC MEASUREMENTS @ 1.8bar (26psi), CA 0.0°

310/690-18x12.5J WHB

LOADED RADIUS

SPEED [km/h] \ LOAD [kg]	150	300	450	600	750
20	338.0	333.0	328.1	323.4	318.8
60	338.3	333.4	328.6	323.9	319.4
100	338.8	333.9	329.2	324.6	320.1
140	339.4	334.6	330.0	325.5	321.0
180	340.2	335.5	331.0	326.5	322.2
220	341.1	336.5	332.1	327.8	323.6
260	342.1	337.7	333.4	329.2	325.1
280					
300					

ROLLING RADIUS

SPEED [km/h] \ LOAD [kg]	150	300	450	600	750
20	337.8	336.4	335.5	334.9	334.4
60	337.9	336.4	335.6	335.0	334.5
100	338.1	336.7	335.8	335.2	334.7
140	338.6	337.1	336.2	335.6	335.1
180	339.2	337.7	336.8	336.2	335.7
220	340.1	338.5	337.6	336.9	336.4
260	341.1	339.5	338.5	337.9	337.4
280					
300					

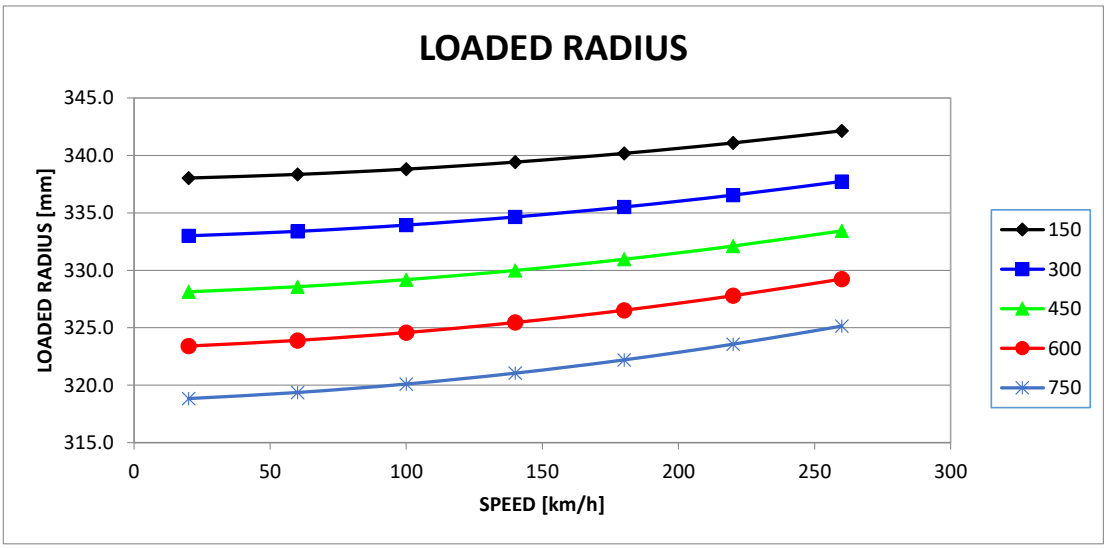

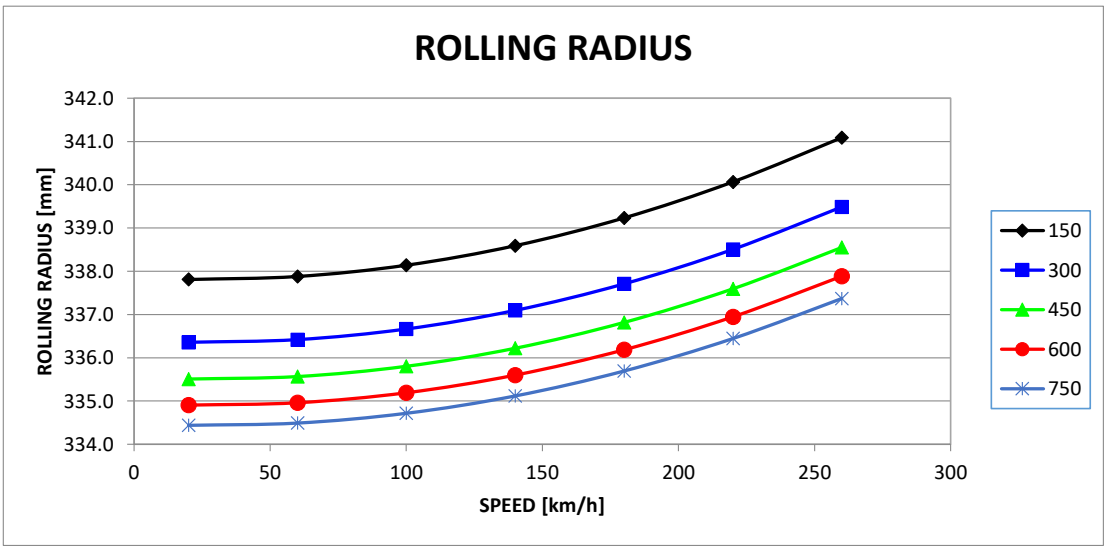

STATIC RADIAL DEFLECTION – 310/690-18x12.5J @ CA 0.0 ° DHG

Load [kg]	Inflation Pressure [bar]						
	2.6	2.4	2.2	2.0	1.8	1.6	1.4
0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
25	0.7	0.7	0.7	0.8	0.8	0.9	1.0
50	1.3	1.4	1.5	1.6	1.7	1.8	2.0
75	2.0	2.1	2.2	2.4	2.5	2.7	3.0
100	2.6	2.8	2.9	3.1	3.3	3.6	4.0
125	3.3	3.5	3.7	3.9	4.2	4.5	4.9
150	3.9	4.2	4.4	4.6	5.0	5.4	5.9
175	4.6	4.8	5.1	5.4	5.8	6.2	6.8
200	5.2	5.5	5.8	6.1	6.6	7.1	7.8
225	5.8	6.2	6.5	6.9	7.4	8.0	8.7
250	6.4	6.8	7.2	7.6	8.2	8.8	9.6
275	7.1	7.5	7.8	8.3	8.9	9.6	10.6
300	7.7	8.1	8.5	9.1	9.7	10.5	11.5
325	8.3	8.7	9.2	9.8	10.5	11.3	12.4
350	8.9	9.4	9.8	10.5	11.2	12.1	13.3
375	9.5	10.0	10.5	11.2	12.0	12.9	14.2
400	10.1	10.6	11.1	11.9	12.7	13.8	15.1
425	10.7	11.2	11.8	12.6	13.5	14.6	16.0
450	11.2	11.8	12.4	13.3	14.2	15.4	16.8
475	11.8	12.4	13.1	14.0	15.0	16.1	17.7
500	12.4	13.0	13.7	14.7	15.7	16.9	18.6
525	13.0	13.6	14.3	15.4	16.4	17.7	19.5
550	13.5	14.2	14.9	16.0	17.2	18.5	20.3
575	14.1	14.7	15.5	16.7	17.9	19.3	21.2
600	14.7	15.3	16.1	17.4	18.6	20.0	22.0
625	15.2	15.9	16.8	18.0	19.3	20.8	22.8
650	15.8	16.5	17.4	18.7	20.0	21.5	23.7
675	16.3	17.0	18.0	19.4	20.7	22.3	24.5
700	16.9	17.6	18.5	20.0	21.4	23.0	25.3
725	17.4	18.1	19.1	20.7	22.1	23.8	26.2
750	18.0	18.7	19.7	21.3	22.8	24.5	27.0
775	18.5	19.2	20.3	21.9	23.4	25.2	27.8
800	19.1	19.8	20.9	22.6	24.1	26.0	28.6

STATIC RADIAL DEFLECTION – 310/690-18x12.5J @ CA 0.0° DHG

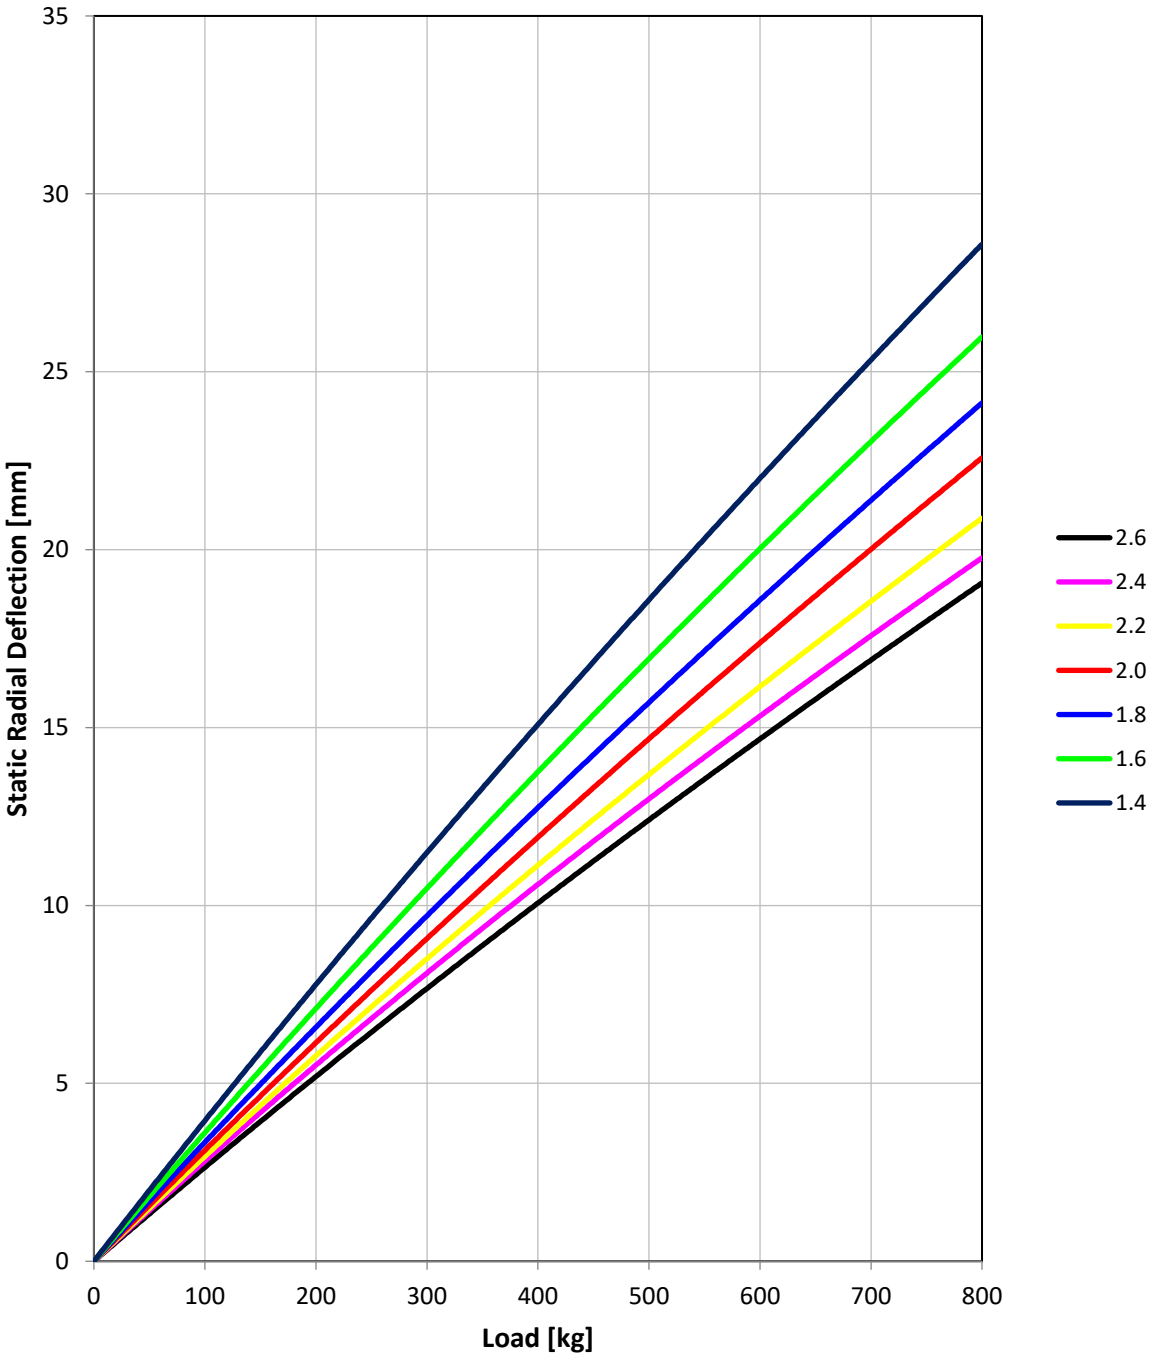

STATIC RADIAL DEFLECTION – 310/690-18x12.5J @ CA -3.0 ° DHG

Load [kg]	Inflation Pressure [bar]						
	2.6	2.4	2.2	2.0	1.8	1.6	1.4
0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
25	0.8	0.9	0.9	1.0	1.0	1.1	1.2
50	1.6	1.7	1.8	1.9	2.0	2.1	2.3
75	2.4	2.5	2.7	2.8	3.0	3.1	3.4
100	3.1	3.3	3.5	3.7	3.9	4.1	4.5
125	3.9	4.1	4.3	4.6	4.8	5.1	5.6
150	4.6	4.9	5.2	5.5	5.8	6.1	6.6
175	5.3	5.6	6.0	6.3	6.7	7.1	7.7
200	6.0	6.4	6.7	7.1	7.5	8.0	8.7
225	6.7	7.1	7.5	8.0	8.4	9.0	9.8
250	7.4	7.8	8.3	8.8	9.3	9.9	10.8
275	8.1	8.5	9.0	9.6	10.1	10.8	11.8
300	8.7	9.2	9.8	10.3	11.0	11.7	12.7
325	9.4	9.9	10.5	11.1	11.8	12.6	13.7
350	10.0	10.6	11.2	11.9	12.6	13.5	14.7
375	10.7	11.3	11.9	12.6	13.4	14.4	15.6
400	11.3	11.9	12.6	13.3	14.2	15.2	16.6
425	11.9	12.6	13.3	14.1	15.0	16.1	17.5
450	12.5	13.2	14.0	14.8	15.7	16.9	18.4
475	13.2	13.8	14.6	15.5	16.5	17.7	19.3
500	13.8	14.5	15.3	16.2	17.2	18.5	20.2
525	14.3	15.1	15.9	16.9	18.0	19.4	21.1
550	14.9	15.7	16.6	17.6	18.7	20.2	22.0
575	15.5	16.3	17.2	18.2	19.5	21.0	22.8
600	16.1	16.9	17.8	18.9	20.2	21.7	23.7
625	16.7	17.5	18.5	19.6	20.9	22.5	24.6
650	17.2	18.1	19.1	20.2	21.6	23.3	25.4
675	17.8	18.6	19.7	20.9	22.3	24.1	26.3
700	18.3	19.2	20.3	21.5	23.0	24.8	27.1
725	18.9	19.8	20.9	22.1	23.7	25.6	27.9
750	19.4	20.3	21.5	22.8	24.4	26.3	28.7
775	20.0	20.9	22.1	23.4	25.0	27.1	29.5
800	20.5	21.4	22.6	24.0	25.7	27.8	30.3

STATIC RADIAL DEFLECTION – 310/690-18x12.5J @ CA -3.0° DHG

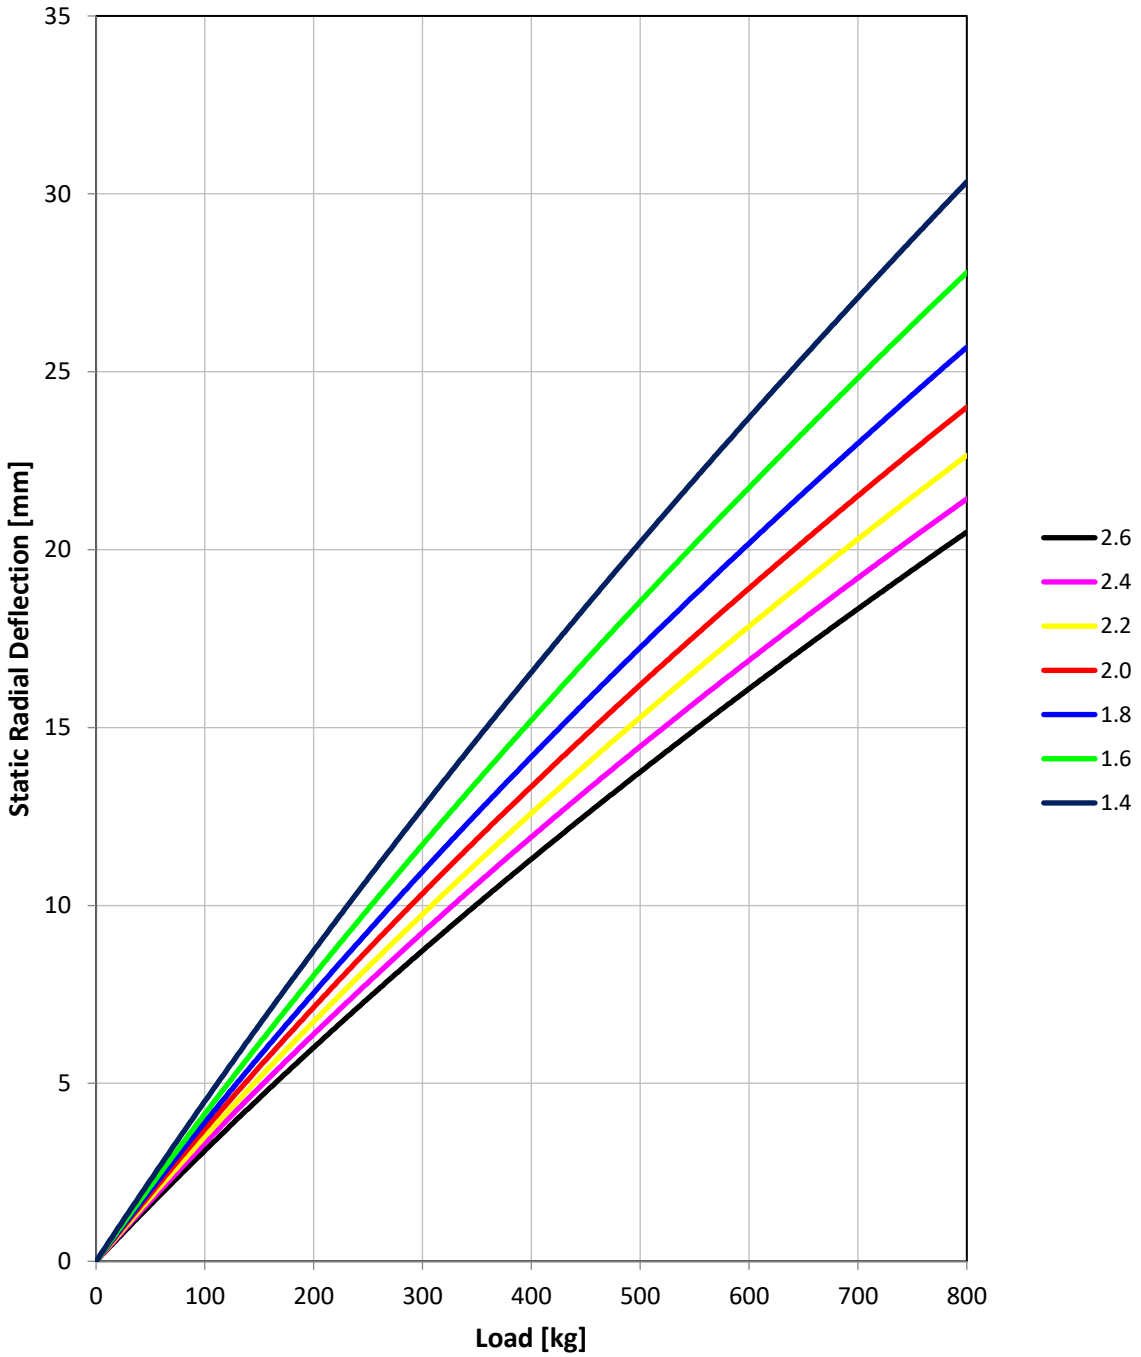

STATIC RADIAL DEFLECTION – 310/690-18x12.0J @ CA 0.0 ° WHB

Load [kg]	Inflation Pressure [bar]						
	2.6	2.4	2.2	2.0	1.8	1.6	1.4
0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
25	0.7	0.8	0.8	0.8	0.9	1.0	1.0
50	1.4	1.5	1.6	1.7	1.8	1.9	2.1
75	2.1	2.3	2.3	2.5	2.6	2.8	3.1
100	2.8	3.0	3.1	3.3	3.5	3.8	4.1
125	3.4	3.7	3.8	4.1	4.3	4.7	5.1
150	4.1	4.4	4.6	4.8	5.2	5.6	6.1
175	4.8	5.1	5.3	5.6	6.0	6.5	7.0
200	5.4	5.8	6.0	6.4	6.8	7.4	8.0
225	6.0	6.5	6.7	7.1	7.6	8.3	9.0
250	6.7	7.2	7.5	7.9	8.4	9.1	9.9
275	7.3	7.8	8.2	8.6	9.2	10.0	10.8
300	7.9	8.5	8.9	9.4	10.0	10.8	11.8
325	8.5	9.1	9.5	10.1	10.8	11.7	12.7
350	9.2	9.8	10.2	10.8	11.6	12.5	13.6
375	9.8	10.4	10.9	11.6	12.3	13.4	14.5
400	10.4	11.0	11.6	12.3	13.1	14.2	15.4
425	11.0	11.6	12.2	13.0	13.9	15.0	16.3
450	11.5	12.3	12.9	13.7	14.6	15.8	17.2
475	12.1	12.9	13.5	14.4	15.3	16.6	18.0
500	12.7	13.5	14.2	15.1	16.1	17.4	18.9
525	13.3	14.0	14.8	15.7	16.8	18.2	19.7
550	13.9	14.6	15.4	16.4	17.5	19.0	20.6
575	14.4	15.2	16.1	17.1	18.3	19.8	21.4
600	15.0	15.8	16.7	17.7	19.0	20.5	22.3
625	15.5	16.4	17.3	18.4	19.7	21.3	23.1
650	16.1	16.9	17.9	19.1	20.4	22.1	23.9
675	16.6	17.5	18.5	19.7	21.1	22.8	24.8
700	17.2	18.0	19.1	20.4	21.8	23.6	25.6
725	17.7	18.6	19.7	21.0	22.5	24.3	26.4
750	18.3	19.1	20.3	21.6	23.2	25.0	27.2
775	18.8	19.7	20.9	22.3	23.9	25.8	28.0
800	19.3	20.2	21.5	22.9	24.5	26.5	28.8

STATIC RADIAL DEFLECTION – 310/690-18x12.0J @ CA 0.0° WHB

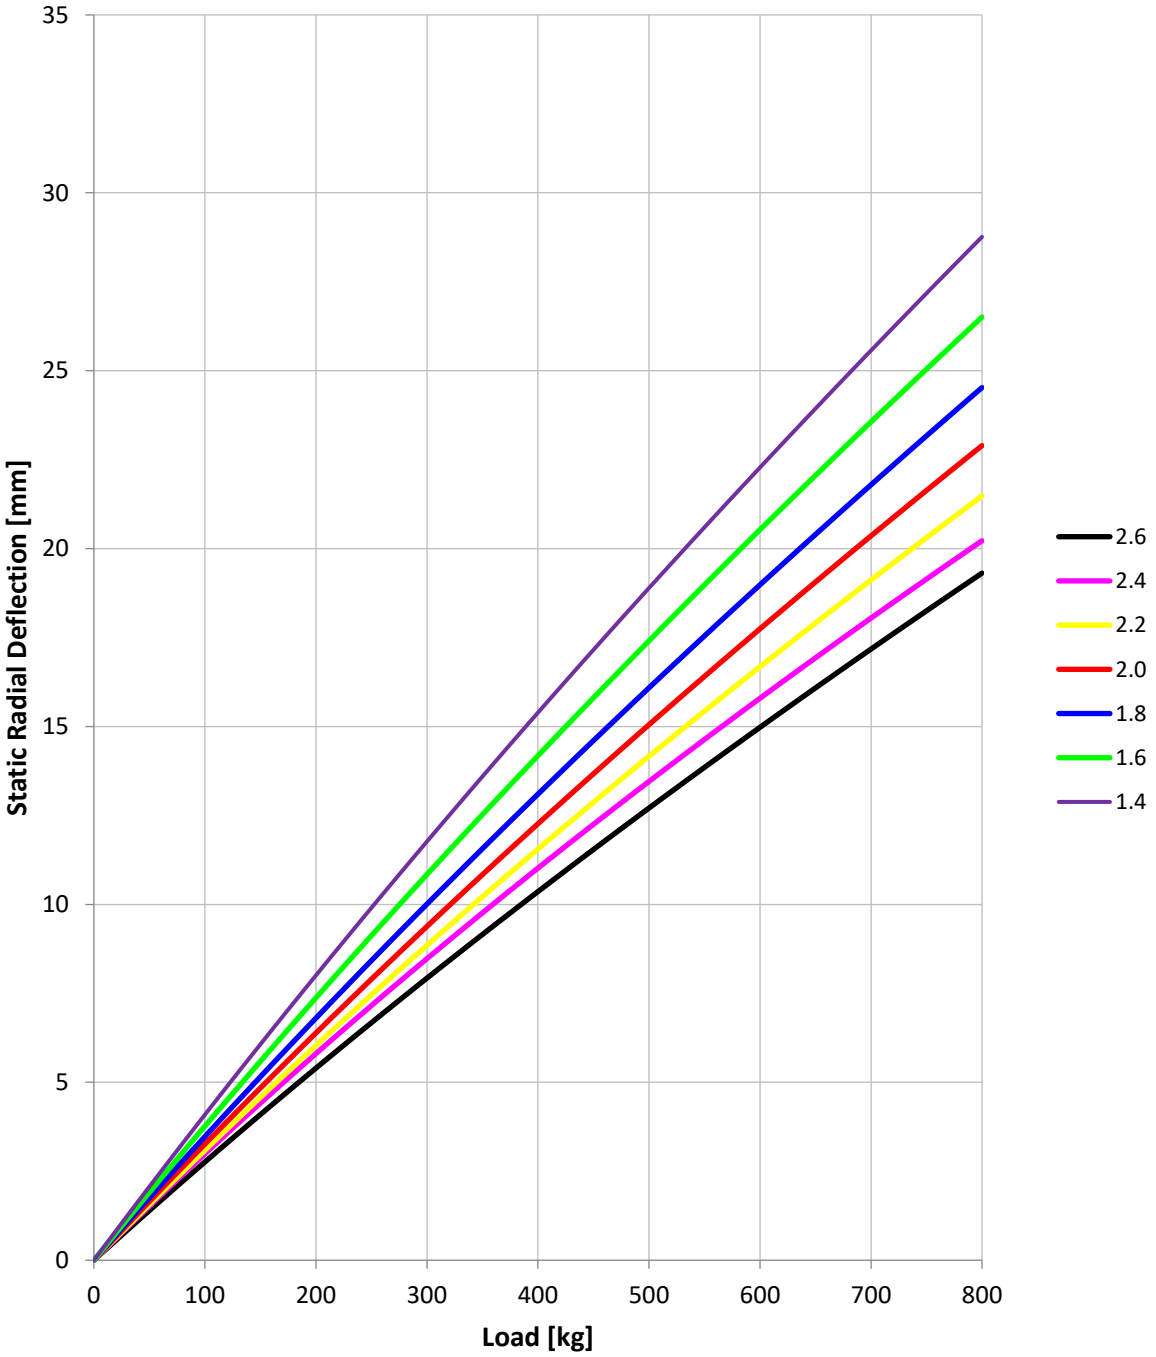

STATIC RADIAL DEFLECTION – 310/690-18x12.0J @ CA 3.0 ° WHB

Load [kg]	Inflation Pressure [bar]						
	2.6	2.4	2.2	2.0	1.8	1.6	1.4
0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
25	0.8	0.9	0.9	1.0	1.0	1.1	1.2
50	1.6	1.7	1.8	1.9	2.0	2.2	2.3
75	2.4	2.6	2.7	2.8	3.0	3.2	3.4
100	3.2	3.4	3.6	3.7	4.0	4.3	4.5
125	4.0	4.2	4.5	4.6	5.0	5.3	5.6
150	4.7	5.0	5.3	5.5	5.9	6.3	6.7
175	5.5	5.8	6.1	6.4	6.8	7.3	7.7
200	6.2	6.6	6.9	7.2	7.7	8.3	8.8
225	6.9	7.3	7.7	8.1	8.6	9.2	9.8
250	7.6	8.0	8.5	8.9	9.5	10.2	10.8
275	8.3	8.8	9.3	9.7	10.4	11.1	11.8
300	9.0	9.5	10.0	10.5	11.2	12.0	12.8
325	9.7	10.2	10.7	11.3	12.1	12.9	13.8
350	10.3	10.9	11.5	12.1	12.9	13.8	14.8
375	11.0	11.6	12.2	12.8	13.7	14.7	15.7
400	11.6	12.2	12.9	13.6	14.5	15.6	16.7
425	12.3	12.9	13.6	14.3	15.3	16.5	17.6
450	12.9	13.6	14.3	15.1	16.1	17.3	18.5
475	13.5	14.2	15.0	15.8	16.9	18.1	19.4
500	14.1	14.9	15.7	16.5	17.6	19.0	20.3
525	14.8	15.5	16.3	17.2	18.4	19.8	21.2
550	15.4	16.1	17.0	17.9	19.1	20.6	22.1
575	16.0	16.7	17.6	18.6	19.9	21.4	23.0
600	16.6	17.3	18.3	19.3	20.6	22.2	23.9
625	17.1	17.9	18.9	20.0	21.4	23.0	24.7
650	17.7	18.5	19.6	20.7	22.1	23.8	25.6
675	18.3	19.1	20.2	21.4	22.8	24.5	26.5
700	18.9	19.7	20.8	22.0	23.5	25.3	27.3
725	19.4	20.3	21.4	22.7	24.2	26.1	28.1
750	20.0	20.9	22.0	23.3	24.9	26.8	29.0
775	20.5	21.4	22.6	24.0	25.6	27.6	29.8
800	21.1	22.0	23.2	24.6	26.2	28.3	30.6

STATIC RADIAL DEFLECTION – 310/690-18x12.0J @ CA 3.0° WHB

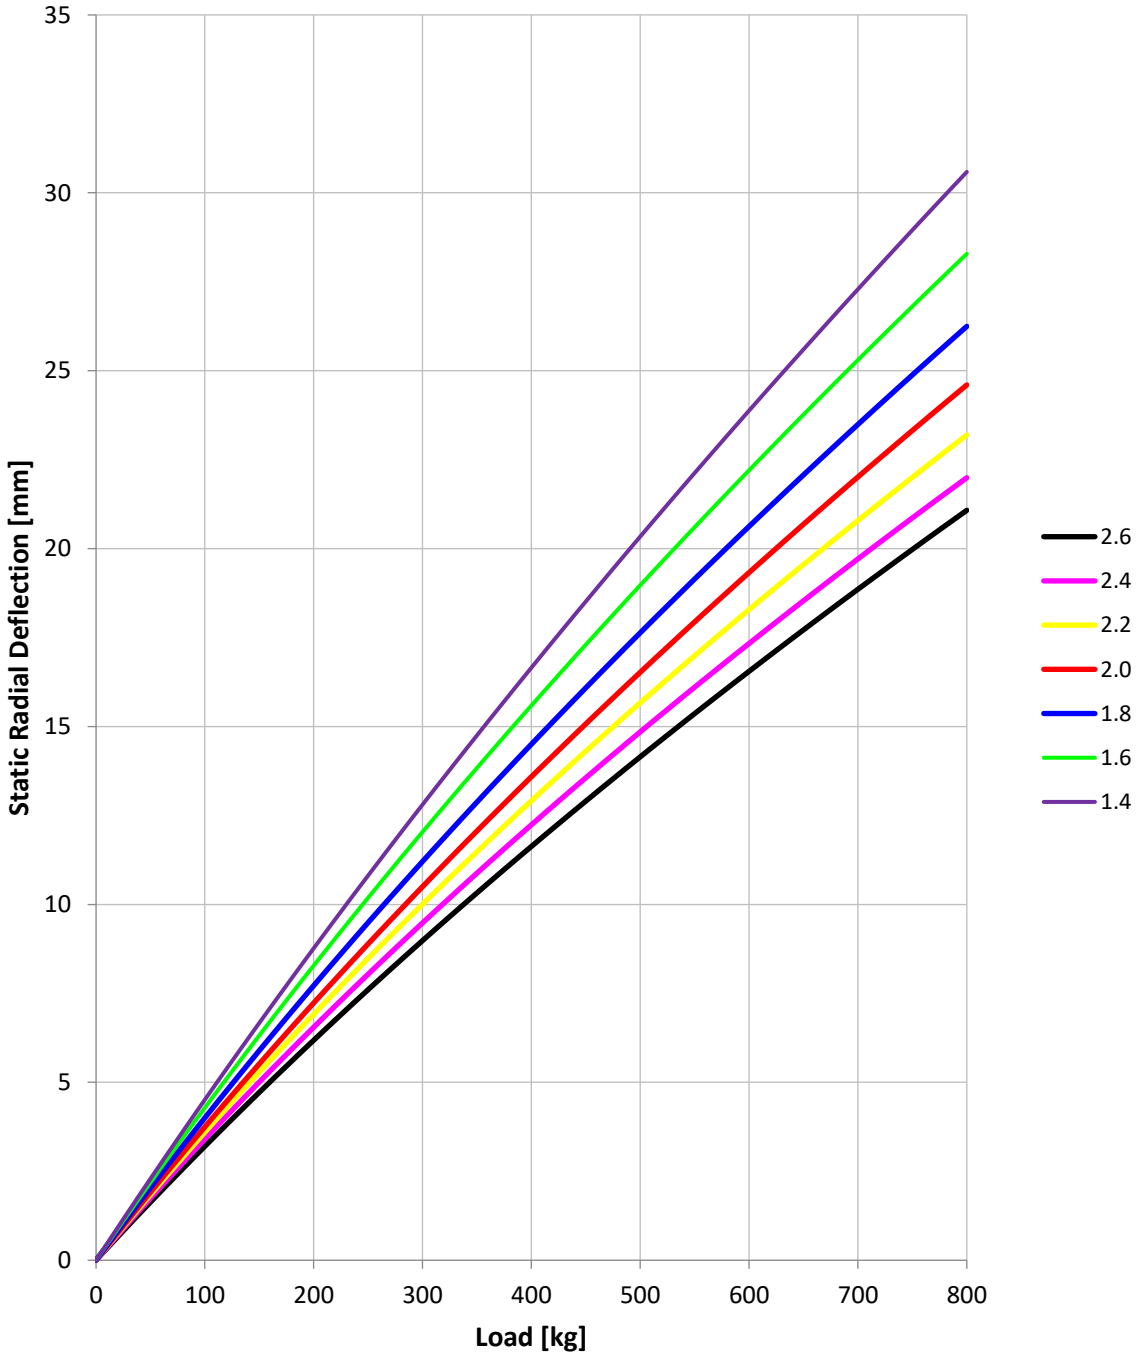

STATIC RADIAL DEFLECTION – 310/690-18x12.5J @ CA 0.0 ° WHB

Load [kg]	Inflation Pressure [bar]						
	2.6	2.4	2.2	2.0	1.8	1.6	1.4
0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
25	0.7	0.7	0.8	0.8	0.9	0.9	1.0
50	1.4	1.5	1.5	1.7	1.7	1.9	2.1
75	2.1	2.2	2.3	2.5	2.6	2.8	3.1
100	2.8	2.9	3.1	3.3	3.5	3.7	4.1
125	3.4	3.6	3.8	4.1	4.3	4.6	5.1
150	4.1	4.3	4.5	4.9	5.1	5.6	6.0
175	4.8	5.0	5.3	5.6	6.0	6.4	7.0
200	5.4	5.7	6.0	6.4	6.8	7.3	8.0
225	6.0	6.4	6.7	7.2	7.6	8.2	9.0
250	6.7	7.1	7.4	7.9	8.4	9.1	9.9
275	7.3	7.7	8.1	8.7	9.2	10.0	10.9
300	7.9	8.4	8.8	9.4	10.0	10.8	11.8
325	8.6	9.0	9.5	10.2	10.8	11.7	12.7
350	9.2	9.7	10.2	10.9	11.6	12.5	13.7
375	9.8	10.3	10.8	11.6	12.3	13.4	14.6
400	10.4	11.0	11.5	12.3	13.1	14.2	15.5
425	11.0	11.6	12.2	13.0	13.9	15.0	16.4
450	11.6	12.2	12.8	13.7	14.6	15.8	17.3
475	12.2	12.8	13.5	14.4	15.4	16.7	18.2
500	12.7	13.4	14.1	15.1	16.1	17.5	19.1
525	13.3	14.0	14.8	15.8	16.9	18.3	20.0
550	13.9	14.6	15.4	16.5	17.6	19.1	20.8
575	14.5	15.2	16.0	17.2	18.3	19.9	21.7
600	15.0	15.8	16.7	17.9	19.1	20.6	22.6
625	15.6	16.4	17.3	18.5	19.8	21.4	23.4
650	16.1	17.0	17.9	19.2	20.5	22.2	24.3
675	16.7	17.5	18.5	19.8	21.2	23.0	25.1
700	17.2	18.1	19.1	20.5	21.9	23.7	26.0
725	17.8	18.7	19.7	21.1	22.6	24.5	26.8
750	18.3	19.2	20.3	21.8	23.3	25.3	27.7
775	18.8	19.8	20.9	22.4	24.0	26.0	28.5
800	19.4	20.3	21.5	23.1	24.7	26.8	29.3

STATIC RADIAL DEFLECTION – 310/690-18x12.5J @ CA 0.0° WHB

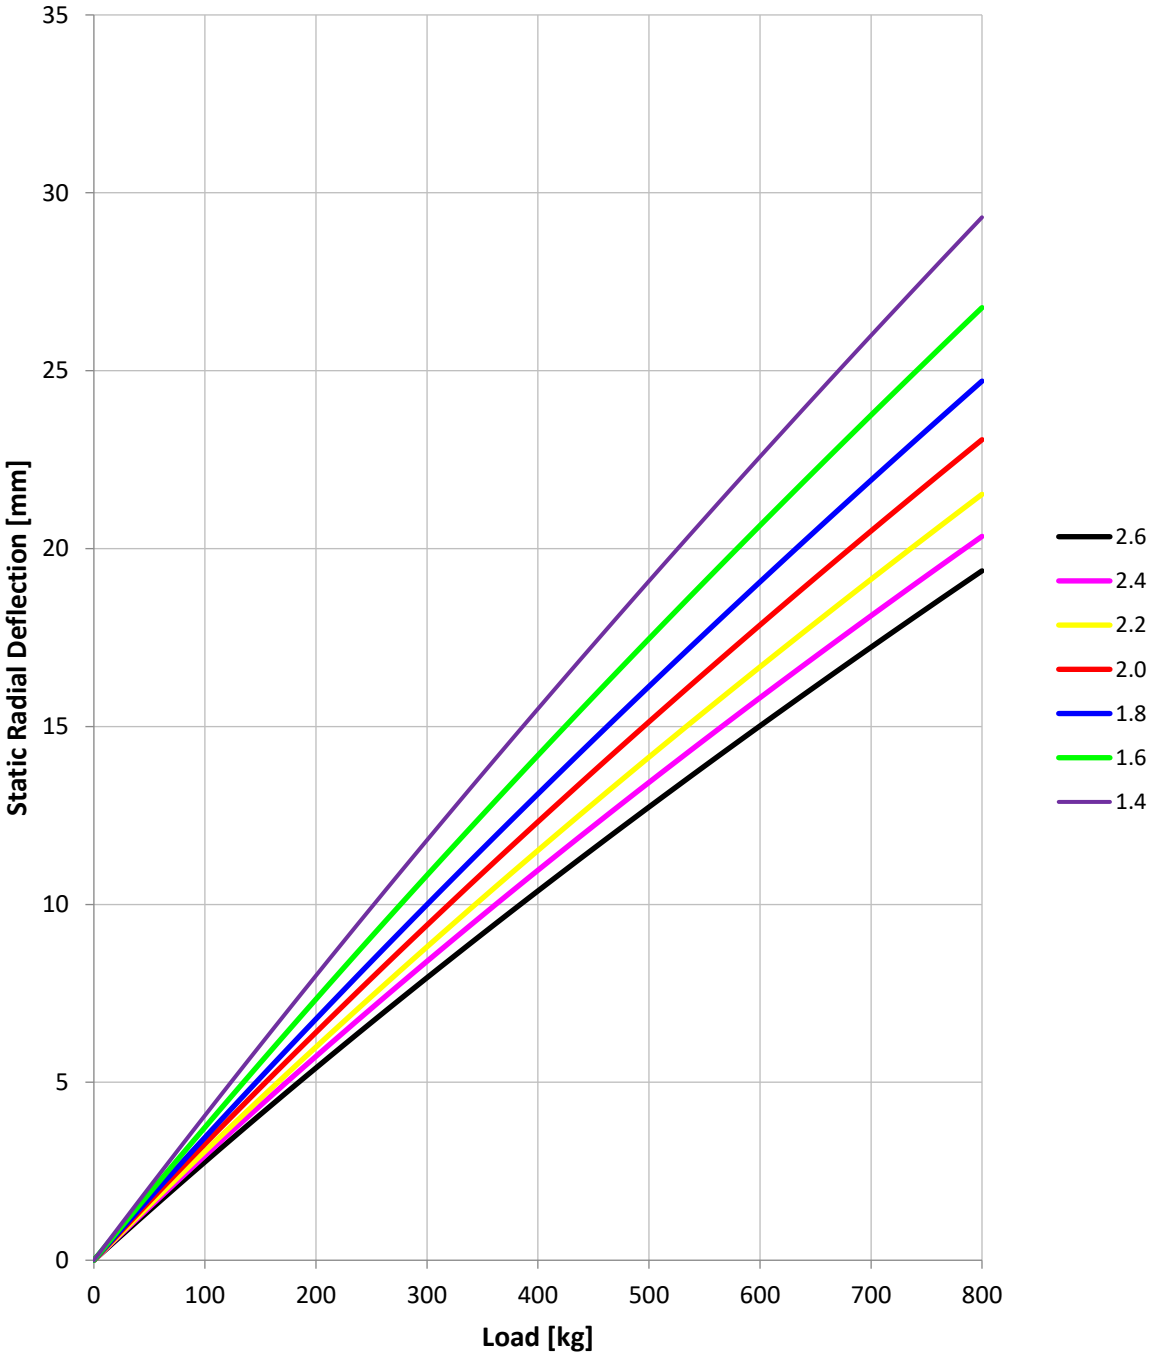

STATIC RADIAL DEFLECTION – 310/690-18x12.5J @ CA 3.0 ° WHB

Load [kg]	Inflation Pressure [bar]						
	2.6	2.4	2.2	2.0	1.8	1.6	1.4
0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
25	0.8	0.9	0.9	0.9	1.0	1.1	1.1
50	1.6	1.7	1.8	1.9	2.0	2.1	2.3
75	2.3	2.5	2.6	2.8	2.9	3.2	3.4
100	3.1	3.3	3.5	3.7	3.9	4.2	4.5
125	3.8	4.1	4.3	4.5	4.8	5.2	5.5
150	4.5	4.9	5.1	5.4	5.7	6.2	6.6
175	5.2	5.6	5.9	6.2	6.6	7.2	7.7
200	5.9	6.4	6.7	7.1	7.5	8.2	8.7
225	6.6	7.1	7.5	7.9	8.4	9.1	9.7
250	7.3	7.9	8.3	8.7	9.3	10.1	10.7
275	8.0	8.6	9.0	9.5	10.1	11.0	11.7
300	8.7	9.3	9.8	10.3	10.9	11.9	12.7
325	9.3	10.0	10.5	11.0	11.8	12.8	13.7
350	10.0	10.6	11.2	11.8	12.6	13.7	14.6
375	10.6	11.3	11.9	12.6	13.4	14.6	15.6
400	11.2	12.0	12.6	13.3	14.2	15.4	16.5
425	11.9	12.6	13.3	14.0	15.0	16.3	17.5
450	12.5	13.3	14.0	14.8	15.8	17.1	18.4
475	13.1	13.9	14.7	15.5	16.6	18.0	19.3
500	13.7	14.5	15.4	16.2	17.3	18.8	20.2
525	14.3	15.1	16.0	16.9	18.1	19.6	21.1
550	14.9	15.8	16.7	17.6	18.9	20.4	22.0
575	15.5	16.4	17.3	18.3	19.6	21.2	22.9
600	16.1	17.0	18.0	18.9	20.3	22.0	23.8
625	16.6	17.6	18.6	19.6	21.1	22.8	24.6
650	17.2	18.1	19.2	20.3	21.8	23.6	25.5
675	17.8	18.7	19.8	20.9	22.5	24.4	26.3
700	18.3	19.3	20.5	21.6	23.2	25.1	27.2
725	18.9	19.9	21.1	22.2	23.9	25.9	28.0
750	19.4	20.4	21.7	22.9	24.6	26.7	28.9
775	20.0	21.0	22.3	23.5	25.3	27.4	29.7
800	20.5	21.5	22.9	24.1	26.0	28.1	30.5
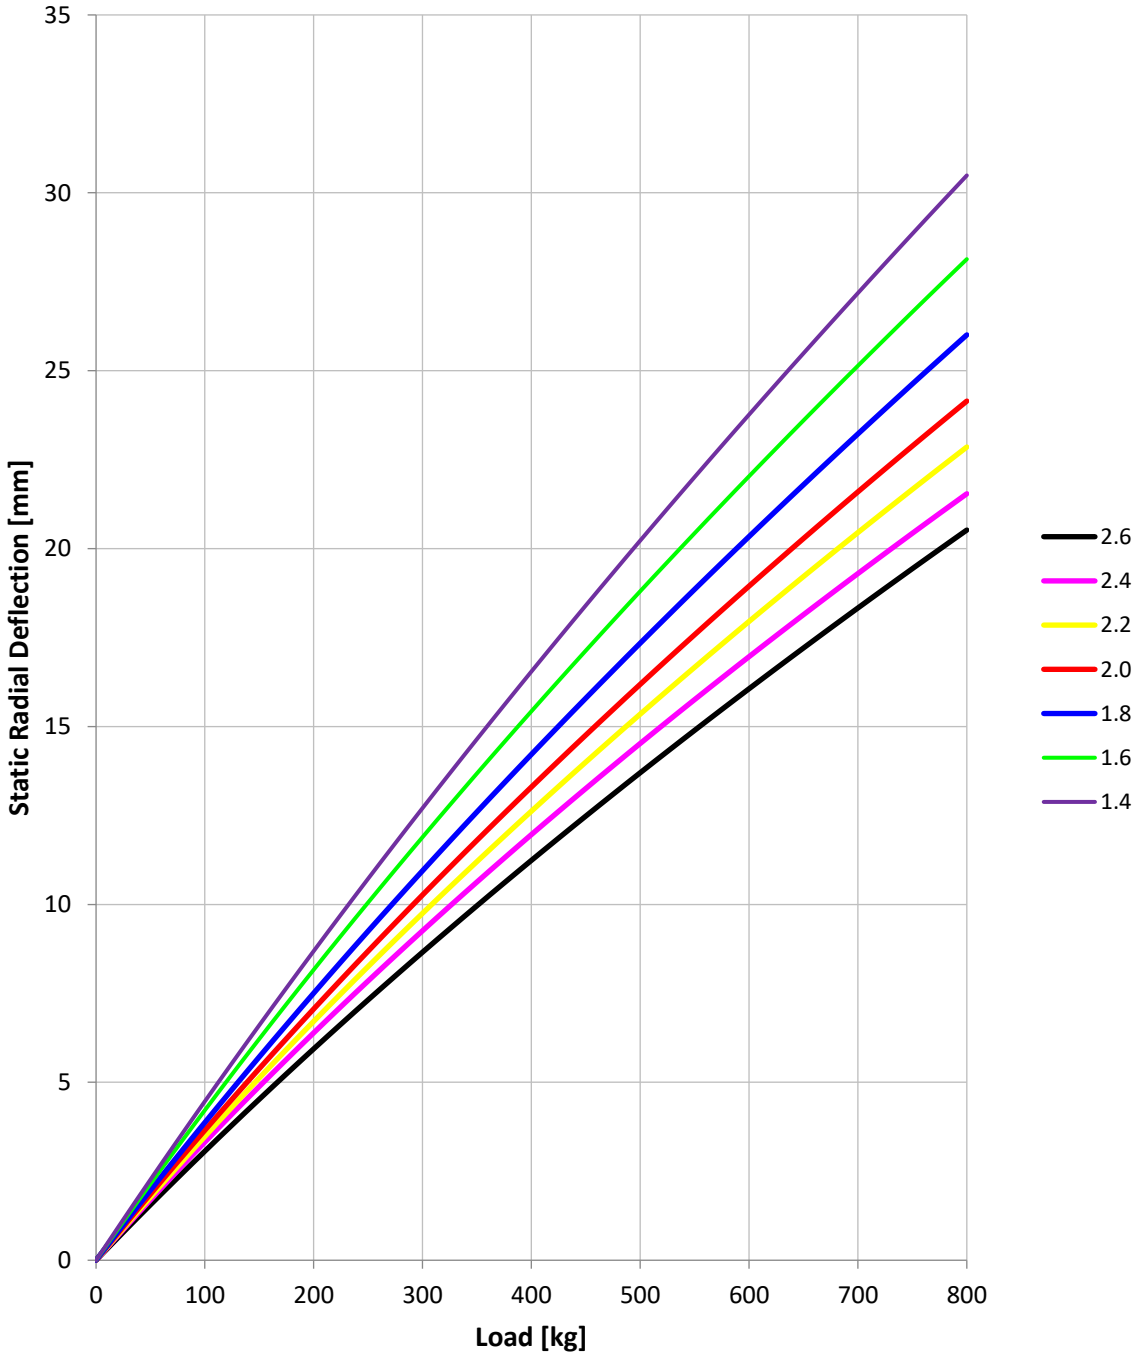
STATIC RADIAL DEFLECTION – 310/690-18x12.5J @ CA 3.0° WHB