TYRE DATA BOOKLET

315/705-19 DHB
315/705-19 WH
2022 - 2026

CONTENTS:

1: INTRODUCTION

2: STATIC DIMENSIONS (DHB/WH)

3: DYNAMIC MEASUREMENTS (DHB)

4: DYNAMIC MEASUREMENTS (WH)

5: STATIC RADIAL DEFLECTION (DHB)

INTRODUCTION

INTRODUCTION
This document provides the user with technical information regarding several aspects of the tyre characteristics. The data was acquired using indoor testing methods on physical tyres. For individual car fitments, usage guidelines and prescriptions for camber and pressure please refer to the relevent Pirelli Technical Booklet, which is included as part of this Pirelli Data Package.

STATIC DIMENSIONS

Slick Tyres				
Size & Fitment	Nominal Weight (kilograms)	Max Width **(C)** (mm)	Circumference **(πD)** (mm)	Tread Width **(Cb)** (mm)
315/705-19 DHB 19"x12.0J	10.7	327	2216	295

Wet Tyres				
Size & Fitment	Nominal Weight (kilograms)	Max Width **(C)** (mm)	Circumference **(πD)** (mm)	Tread Width **(Cb)** (mm)
315/705-19 WH 19"x12.0J	12.8	321	2243	292

DYNAMIC MEASUREMENTS @ 1.9bar (27.5psi), CA 0.0°

315/705-19x12.0J DHB

LOADED RADIUS

SPEED [km/h] \ LOAD [kg]	150	300	450	600	750
20	347.7	343.3	338.8	334.3	329.8
60	347.9	343.6	339.2	334.7	330.2
100	348.1	343.9	339.6	335.2	330.7
140	348.4	344.3	340.0	335.7	331.2
180	348.8	344.7	340.5	336.3	331.9
220	349.1	345.2	341.1	336.9	332.6
260	349.6	345.7	341.7	337.6	333.3

ROLLING RADIUS

SPEED [km/h] \ LOAD [kg]	150	300	450	600	750
20	350.2	349.5	349.1	348.8	348.6
60	350.2	349.5	349.1	348.8	348.6
100	350.3	349.6	349.2	348.9	348.6
140	350.5	349.8	349.3	349.0	348.8
180	350.8	350.0	349.6	349.2	349.0
220	351.1	350.3	349.8	349.5	349.3
260	351.5	350.7	350.2	349.9	349.6

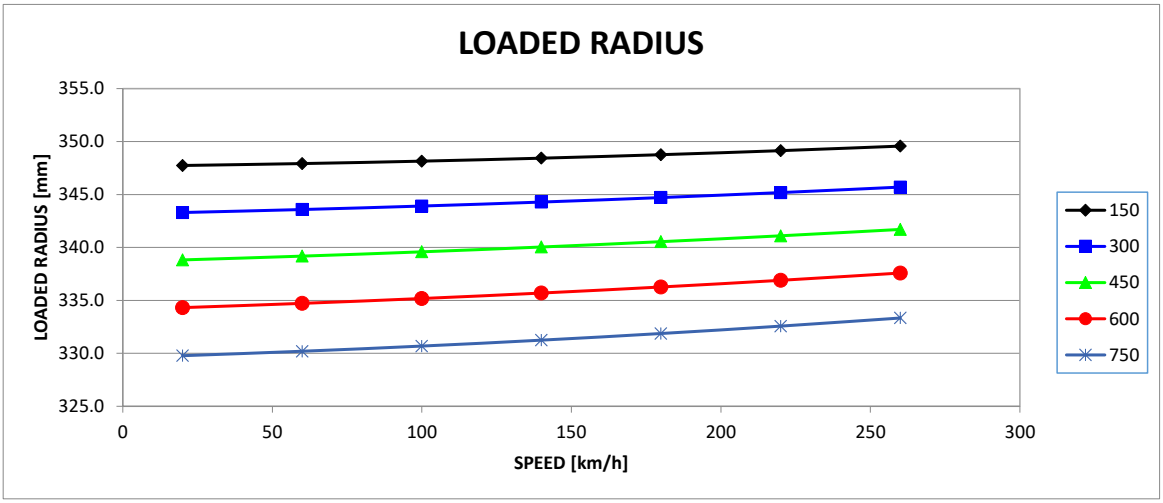

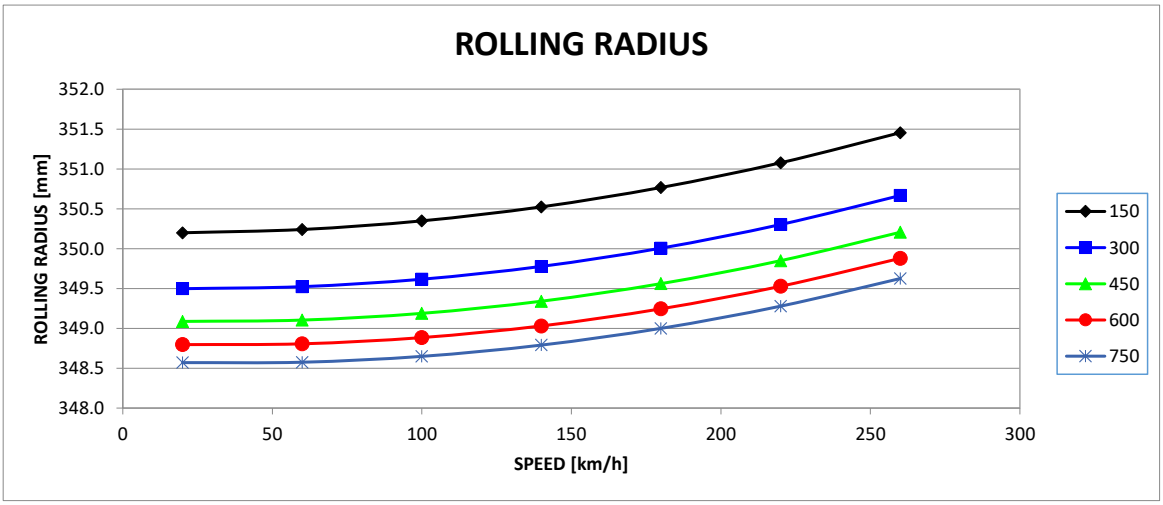

DYNAMIC MEASUREMENTS @ 1.9bar (27.5psi), CA 0.0°

315/705-19x12.0J WH

LOADED RADIUS

LOAD [kg]

SPEED [km/h]	51	153	331	510	637	764
30	355.7	352.3	346.8	341.4	337.8	334.2
100	356.8	353.5	348.2	342.9	339.3	335.9
180	358.3	355.2	350.2	345.3	341.9	338.5
250	360.0	357.2	352.6	348.0	344.8	341.5

ROLLING RADIUS

LOAD [kg]

SPEED [km/h]	51	153	331	510	637	764
30	354.4	352.3	350.8	349.8	349.3	348.9
100	355.2	353.0	351.5	350.6	350.1	349.7
180	356.6	354.5	352.9	352.1	351.7	351.3
250	358.4	356.2	354.8	354.1	353.7	353.5

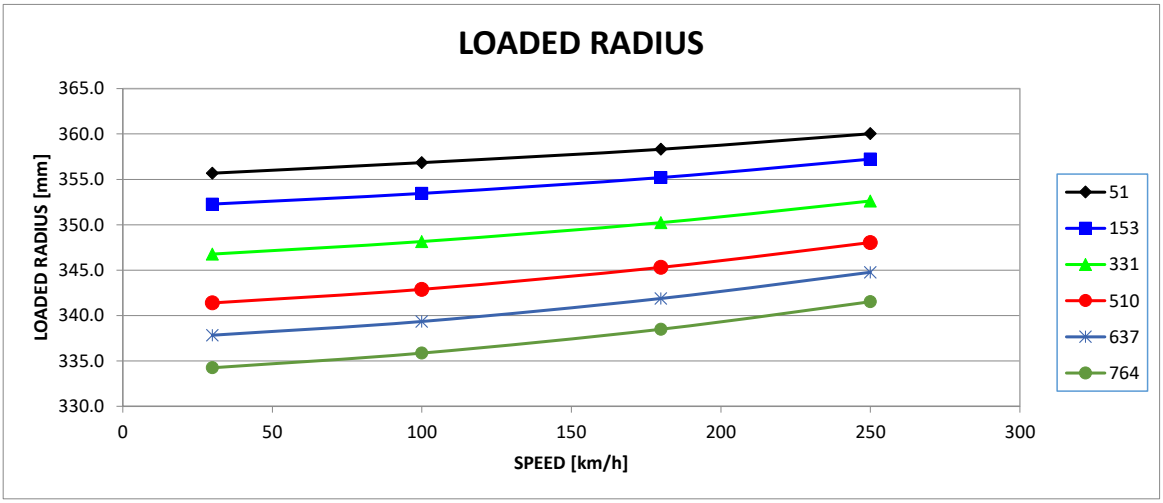

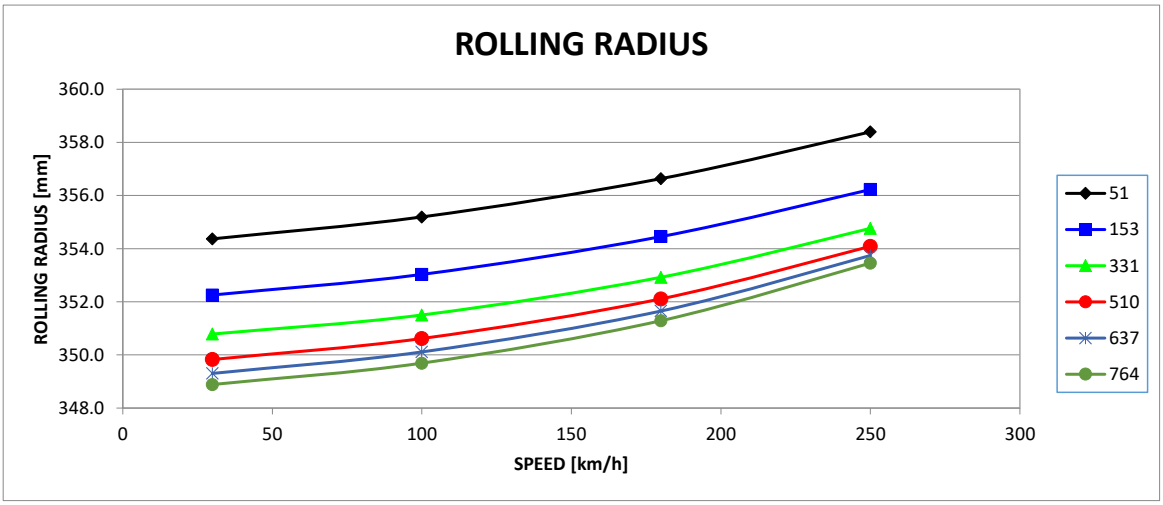

STATIC RADIAL DEFLECTION – 315/705-19x12J @ CA 0.0 ° DHB

Load [kg]	Inflation Pressure [bar]						
	2.6	2.4	2.2	2.0	1.8	1.6	1.4
0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
25	0.7	0.7	0.8	0.8	0.9	0.9	1.0
50	1.4	1.5	1.5	1.7	1.7	1.9	2.0
75	2.1	2.2	2.3	2.5	2.6	2.8	3.0
100	2.7	2.9	3.0	3.3	3.4	3.7	4.0
125	3.4	3.6	3.7	4.0	4.2	4.6	5.0
150	4.0	4.2	4.4	4.8	5.0	5.5	6.0
175	4.6	4.9	5.1	5.5	5.8	6.3	6.9
200	5.2	5.5	5.8	6.3	6.6	7.2	7.8
225	5.9	6.2	6.5	7.0	7.3	8.0	8.8
250	6.5	6.8	7.1	7.7	8.1	8.8	9.7
275	7.0	7.4	7.8	8.4	8.9	9.7	10.6
300	7.6	8.0	8.4	9.1	9.6	10.5	11.5
325	8.2	8.6	9.1	9.8	10.3	11.3	12.3
350	8.8	9.2	9.7	10.5	11.1	12.1	13.2
375	9.3	9.8	10.3	11.2	11.8	12.9	14.1
400	9.9	10.4	10.9	11.8	12.5	13.6	14.9
425	10.4	10.9	11.5	12.5	13.2	14.4	15.8
450	11.0	11.5	12.1	13.1	13.9	15.2	16.6
475	11.5	12.1	12.7	13.8	14.6	15.9	17.4
500	12.0	12.6	13.3	14.4	15.2	16.7	18.2
525	12.5	13.2	13.9	15.0	15.9	17.4	19.0
550	13.0	13.7	14.4	15.7	16.6	18.1	19.8
575	13.5	14.2	15.0	16.3	17.2	18.8	20.6
600	14.0	14.7	15.6	16.9	17.9	19.6	21.4
625	14.5	15.3	16.1	17.5	18.5	20.3	22.2
650	15.0	15.8	16.7	18.1	19.2	21.0	23.0
675	15.5	16.3	17.2	18.7	19.8	21.7	23.7
700	16.0	16.8	17.7	19.2	20.4	22.4	24.5
725	16.5	17.3	18.3	19.8	21.1	23.1	25.2
750	17.0	17.8	18.8	20.4	21.7	23.7	26.0
775	17.4	18.3	19.3	21.0	22.3	24.4	26.7
800	17.9	18.8	19.8	21.5	22.9	25.1	27.5

STATIC RADIAL DEFLECTION – 315/705-19x12J @ CA 0.0° DHB

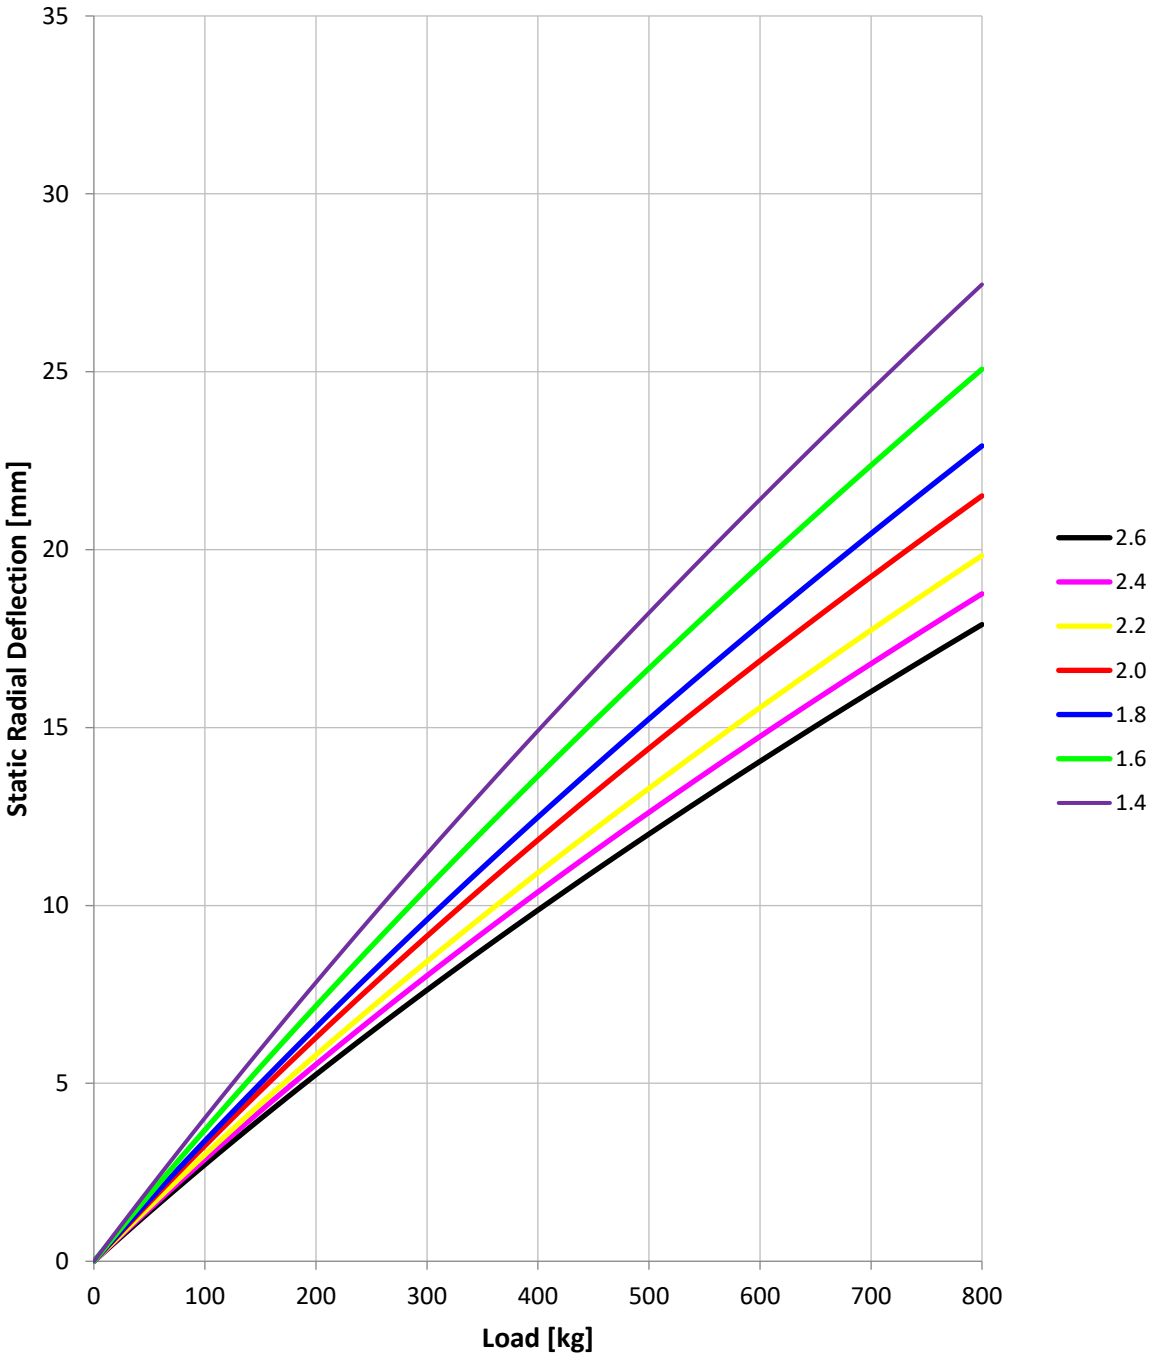

STATIC RADIAL DEFLECTION – 315/705-19x12J @ CA 3.0 ° DHB

Load [kg]	Inflation Pressure [bar]						
	2.6	2.4	2.2	2.0	1.8	1.6	1.4
0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
25	0.9	1.0	1.0	1.1	1.2	1.2	1.3
50	1.9	1.9	2.0	2.1	2.3	2.3	2.5
75	2.7	2.8	2.9	3.1	3.3	3.5	3.7
100	3.6	3.7	3.8	4.0	4.3	4.5	4.9
125	4.4	4.5	4.7	4.9	5.3	5.6	6.0
150	5.2	5.3	5.5	5.8	6.3	6.6	7.1
175	5.9	6.1	6.4	6.7	7.2	7.6	8.1
200	6.6	6.9	7.2	7.5	8.1	8.6	9.2
225	7.4	7.6	7.9	8.3	9.0	9.5	10.2
250	8.1	8.3	8.7	9.1	9.8	10.4	11.2
275	8.7	9.0	9.4	9.9	10.7	11.3	12.2
300	9.4	9.7	10.1	10.7	11.5	12.2	13.1
325	10.0	10.4	10.8	11.4	12.3	13.0	14.1
350	10.7	11.0	11.5	12.1	13.1	13.9	15.0
375	11.3	11.6	12.2	12.9	13.8	14.7	15.9
400	11.9	12.2	12.8	13.6	14.6	15.5	16.8
425	12.5	12.9	13.5	14.2	15.3	16.3	17.7
450	13.1	13.4	14.1	14.9	16.0	17.1	18.5
475	13.7	14.0	14.7	15.6	16.7	17.9	19.4
500	14.2	14.6	15.3	16.2	17.4	18.6	20.2
525	14.8	15.2	15.9	16.9	18.1	19.4	21.0
550	15.3	15.7	16.5	17.5	18.8	20.1	21.8
575	15.9	16.3	17.1	18.1	19.4	20.8	22.6
600	16.4	16.8	17.7	18.7	20.1	21.6	23.4
625	16.9	17.3	18.2	19.3	20.7	22.3	24.2
650	17.5	17.9	18.8	19.9	21.4	23.0	24.9
675	18.0	18.4	19.3	20.5	22.0	23.7	25.7
700	18.5	18.9	19.9	21.1	22.6	24.3	26.4
725	19.0	19.4	20.4	21.6	23.2	25.0	27.2
750	19.5	19.9	20.9	22.2	23.8	25.7	27.9
775	19.9	20.4	21.4	22.8	24.4	26.3	28.6
800	20.4	20.8	22.0	23.3	25.0	27.0	29.3
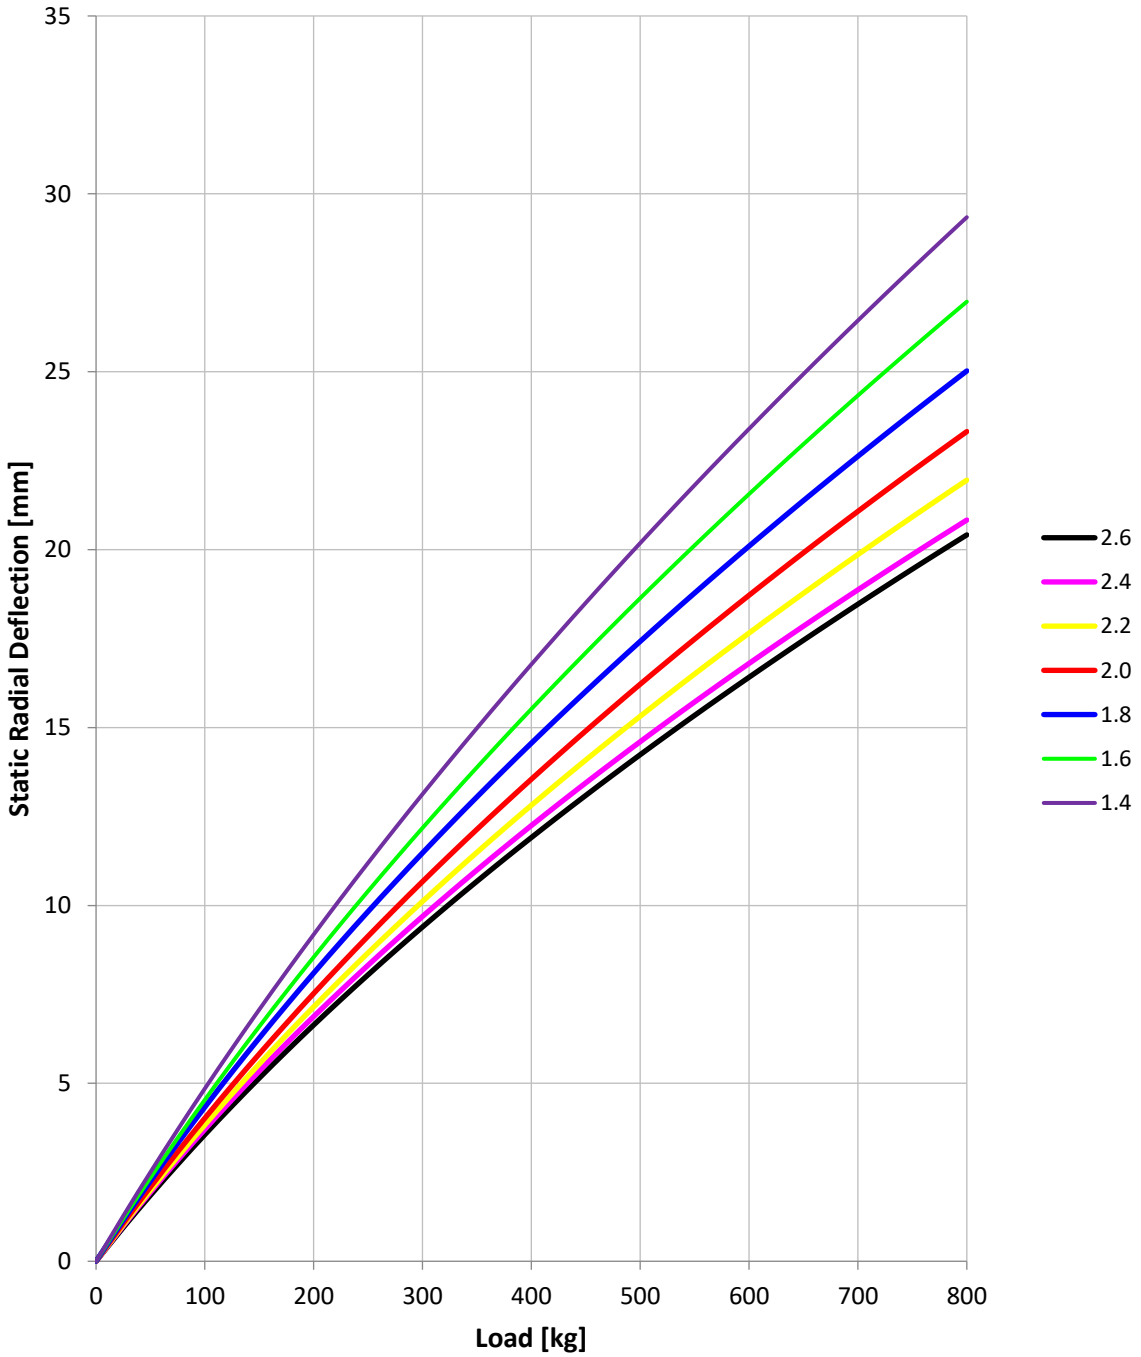
STATIC RADIAL DEFLECTION – 315/705-19x12J @ CA 3.0° DHB