TECHNICAL BOOKLET

GT AMERICA

2026

CONTENTS:

1: INTRODUCTION

2: CHAMPIONSHIP FITMENT LIST

3: GENERAL INFORMATION

4: TYRE PRESSURE MANAGEMENT

5: RUNNING PARAMETERS

6: STATIC/DYNAMIC MEASUREMENT DEFINITIONS

7: TYRE FITTING GUIDANCE

INTRODUCTION - GT AMERICA

INTRODUCTION
This document provides information regarding the fitment, handling and usage of the tyres on cars competing in this Championship. For detailed technical information please refer to the individual Tyre Data Books for each tyre size, which are included as separate PDF files within this Pirelli Data Package.

FITMENT LIST - GT AMERICA - GT3

Make/Model	Front axle				Rear axle		
	Wheel size	Dry tyre	Wet tyre		Wheel size	Dry tyre	Wet tyre
Acura/Honda NSX GT3-047	18" x 12J	310/690-18 DHG	310/690-18 WHB		18" x 13J	320/710-18 DHG	320/710-18 WHB
Aston Martin Vantage AMR GT3-051	18" x 12.5J	310/690-18 DHG	310/690-18 WHB		18" x 13J	320/710-18 DHG	320/710-18 WHB
Audi R8 LMS GT3-038	18" x 12.5J	310/690-18 DHG	310/690-18 WHB		18" x 13J	320/710-18 DHG	320/710-18 WHB
Bentley Continental GT3-049 2018	18" x 13J	320/710-18 DHG	320/710-18 WHB		18" x 13J	320/710-18 DHG	320/710-18 WHB
BMW M4 GT3-053	18" x 12.5J	310/690-18 DHG	310/690-18 WHB		18" x 13J	320/710-18 DHG	320/710-18 WHB
Callaway Corvette C7 GT3-R GT3-045	18" x 12J	310/690-18 DHG	310/690-18 WHB		18" x 13J	320/710-18 DHG	320/710-18 WHB
Chevrolet Corvette Z06 GT3.R GT3-057	18" x 12.5J	310/690-18 DHG	310/690-18 WHB		18" x 13J	320/710-18 DHG	320/710-18 WHB
Ferrari 488 GT3-044	18" x 12.5J	310/690-18 DHG	310/690-18 WHB		18" x 13J	320/710-18 DHG	320/710-18 WHB
Ferrari 296 GT3 GT3-056	18" x 12.5J	310/690-18 DHG	310/690-18 WHB		18" x 13J	320/710-18 DHG	320/710-18 WHB
Ford Mustang GT3 GT3-058	18" x 12.5J	310/690-18 DHG	310/690-18 WHB		18" x 13J	320/710-18 DHG	320/710-18 WHB

FITMENT LIST - GT AMERICA - GT3

Make/Model	Front axle				Rear axle		
	Wheel size	Dry tyre	Wet tyre		Wheel size	Dry tyre	Wet tyre
Lamborghini Huracan GT3 Evo 2 GT3-054	18" x 12J	310/690-18 DHG	310/690-18 WHB		18" x 13J	320/710-18 DHG	320/710-18 WHB
Lamborghini Temerario GT3 GT3-TBA	18" x 12.5J	310/690-18 DHG	310/690-18 WHB		18" x 13J	320/710-18 DHG	320/710-18 WHB
Lexus RC-F GT3-046	18" x 13J	320/710-18 DHG	320/710-18 WHB		18" x 13J	320/710-18 DHG	320/710-18 WHB
McLaren 720S GT3-052	18" x 12.5J	310/690-18 DHG	310/690-18 WHB		18" x 13J	320/710-18 DHG	320/710-18 WHB
Mercedes AMG GT3-042	18" x 12J	310/690-18 DHG	310/690-18 WHB		18" x 13J	320/710-18 DHG	320/710-18 WHB
Nissan GT-R NISMO GT3-030	18" x 13J	320/710-18 DHG	320/710-18 WHB		18" x 13J	320/710-18 DHG	320/710-18 WHB
Nissan GT-R NISMO GT3-048 (2018)	18" x 13J	320/710-18 DHG	320/710-18 WHB		18" x 13J	320/710-18 DHG	320/710-18 WHB
Porsche 911 GT3-R (991 II) GT3-050	18" x 12.5J	310/690-18 DHG	310/690-18 WHB		18" x 13J	320/710-18 DHG	320/710-18 WHB
Porsche 911 GT3-R (992) GT3-055	18" x 12.5J	310/690-18 DHG	310/690-18 WHB		18" x 13J	320/710-18 DHG	320/710-18 WHB

FITMENT LIST - GT AMERICA GT3 (PREVIOUS GEN)

Make/Model	Front axle				Rear axle		
	Wheel size	Dry tyre	Wet tyre		Wheel size	Dry tyre	Wet tyre
Aston Martin Vantage GT3-032	18" x 12.5J	310/690-18 DHG	310/690-18 WHB		18" x 13J	320/710-18 DHG	320/710-18 WHB
Audi R8 LMS Ultra GT3-017	18" x 12J	310/660-18 DHG	310/660-18 WHB		18" x 13J	320/710-18 DHG	320/710-18 WHB
BMW Z4 GT3-023	18" x 12J	310/690-18 DHG	310/690-18 WHB		18" x 13J	320/710-18 DHG	320/710-18 WHB
BMW F13 M6 GT3-043	18" x 13J	320/710-18 DHG	320/710-18 WHB		18" x 13J	320/710-18 DHG	320/710-18 WHB
Corvette Z06R GT3-026	18" x 12J	310/690-18 DHG	310/690-18 WHB		18" x 13J	320/710-18 DHG	320/710-18 WHB
Dodge SRT Viper GT3-036	18" x 12.5J	310/690-18 DHG	310/690-18 WHB		18" x 13J	320/710-18 DHG	320/710-18 WHB
Ferrari 458 Italia GT3-029	18" x 12.5J	310/690-18 DHG	310/690-18 WHB		19" x 13J	320/710-19 DHG	320/710-19 WHB
Lamborghini Gallardo GT3-024	18" x 11J	280/650-18 DHG	280/650-18 WHB		18" x 12.5J	320/710-18 DHG	320/710-18 WHB
Lamborghini Huracan GT3-040	18" x 12J	310/690-18 DHG	310/690-18 WHB		18" x 13J	320/710-18 DHG	320/710-18 WHB
McLaren MP4-12C GT3-031	18" x 12J	310/660-18 DHG	310/660-18 WHB		18" x 13J	320/710-18 DHG	320/710-18 WHB
McLaren 650S GT3-037	18" x 12.5J	310/690-18 DHG	310/690-18 WHB		18" x 13J	320/710-18 DHG	320/710-18 WHB
Mercedes SLS AMG GT3-028	18" x 12J	310/690-18 DHG	310/690-18 WHB		18" x 13J	320/710-18 DHG	320/710-18 WHB
Porsche 911 GT3-R GT3-025	18" x 12J	310/660-18 DHG	310/660-18 WHB		18" x 13J	320/710-18 DHG	320/710-18 WHB

FITMENT LIST - GT AMERICA - GT2

Make/Model	Front axle				Rear axle		
	Wheel size	Dry tyre	Wet tyre		Wheel size	Dry tyre	Wet tyre
Audi R8 LMS GT2	18" x 12.5J	310/660-18 DHG	310/660-18 WHB		18" x 13J	320/710-18 DHG	320/710-18 WHB
Brabham BT63 GT2	18" x 11J	280/650-18 DHG	280/650-18 WHB		18" x 13J	320/710-18 DHG	320/710-18 WHB
Ginetta G56 GT2	18" x 12J	310/660-18 DHG	310/660-18 WHB		18" x 13J	320/710-18 DHG	320/710-18 WHB
KTM X-Bow GT2	18" x 11J	280/650-18 DHG	280/650-18 WHB		18" x 13J	320/710-18 DHG	320/710-18 WHB
Lamborghini Huracan GT2	18" x 11J	280/650-18 DHG	280/650-18 WHB		18" x 12J	300/690-18 DHG	300/690-18 WHB
Maserati MC20 GT2	18" x 12.0J	310/660-18 DHG	310/660-18 WHB		18" x 13J	320/710-18 DHG	320/710-18 WHB
Mercedes AMG GT2	18" x 12.0J	310/660-18 DHG	310/660-18 WHB		18" x 13J	320/710-18 DHG	320/710-18 WHB
Porsche 911 GT2 RS Clubsport	18" x 10.5J	280/650-18 DHG	280/650-18 WHB		18" x 12.5J	320/710-18 DHG	320/710-18 WHB
Porsche 911 GT2 RS Clubsport Evo	18" x 12.0J	310/660-18 DHG	310/660-18 WHB		18" x 13J	320/710-18 DHG	320/710-18 WHB

FITMENT LIST - GT AMERICA - GINETTA CUP

Make/Model	Front axle				Rear axle		
	Wheel size	Dry tyre	Wet tyre		Wheel size	Dry tyre	Wet tyre
Ginetta G56 GTP8	18" x 11J	280/660-18 DHG	280/660-18 WHB		18" x 11J	280/660-18 DHG	280/660-18 WHB

FITMENT LIST - GT AMERICA - INVITATIONAL

Make/Model	Front axle				Rear axle		
	Wheel size	Dry tyre	Wet tyre		Wheel size	Dry tyre	Wet tyre
Ferrari 296 Challenge	19" x 11J	280/680-19 **DH**	280/680-19 **WH**		19" x 12J	300/720-19 **DH**	300/720-19 **WH**
Ferrari 488 Challenge	19" x 9.5J	275/675-19 **DHB**	275/675-19 **WH**		19" x 12J	315/705-19 **DHB**	315/705-19 **WH**
Lamborghini Huracan ST (inc Evo/Evo 2)	18" x 11J	280/650-18 **DHG**	280/650-18 **WHB**		18" x 12J	300/690-18 **DHG**	300/690-18 **WHB**
Porsche 992.1 GT3 Cup	18" x 12J	310/660-18 **DHG**	310/660-18 **WHB**		18" x 13J	320/710-18 **DHG**	320/710-18 **WHB**

FITMENT LIST - GT AMERICA - GT4

Make/Model	Front axle				Rear axle		
	Wheel size	Dry tyre	Wet tyre		Wheel size	Dry tyre	Wet tyre
Alpine A110 GT4	18" x 9J	240/650-18 DHG	240/650-18 WHB		18" x 10J	260/650-18 DHG	260/650-18 WHB
Aston Martin Vantage V8 GT4 EVO (2024)	18" x 11J	280/660-18 DHG	280/660-18 WHB		18" x 11J	280/680-18 DHG	280/680-18 WHB
Audi R8 LMS GT4	18" x 11J	280/650-18 DHG	280/650-18 WHB		18" x 12J	300/690-18 DHG	300/690-18 WHB
BMW M4 GT4 (G82)	18" x 11J	280/680-18 DHG	280/680-18 WHB		18" x 11J	280/680-18 DHG	280/680-18 WHB
Ford Mustang GT4 (2024)	18" x 11J	280/680-18 DHG	280/680-18 WHB		18" x 11J	280/680-18 DHG	280/680-18 WHB
Ginetta G56 GT4 (2022)	18" x 10J	260/650-18 DHG	260/650-18 WHB		18" x 11J	280/660-18 DHG	280/660-18 WHB
Ginetta G56 GT4 Evo (2024)	18" x 11J	280/660-18 DHG	280/660-18 WHB		18" x 11J	280/680-18 DHG	280/680-18 WHB
Lotus Emira GT4	18" x 10J	260/650-18 DHG	260/650-18 WHB		18" x 11J	280/680-18 DHG	280/680-18 WHB
McLaren Artura GT4	18" x 10J	260/650-18 DHG	260/650-18 WHB		18" x 11J	280/680-18 DHG	280/680-18 WHB
Mercedes AMG GT4	18" x 11J	280/660-18 DHG	280/660-18 WHB		18" x 11J	280/680-18 DHG	280/680-18 WHB
Nissan Z GT4	18" x 10.5J	280/660-18 DHG	280/660-18 WHB		18" x 11J	280/680-18 DHG	280/680-18 WHB
Porsche 718 Cayman GT4 RS Clubsport (2022)	18" x 9J	260/650-18 DHG	260/650-18 WHB		18" x 10.35J	280/680-18 DHG	280/680-18 WHB
Toyota GR Supra GT4	18" x 11J	280/660-18 DHG	280/660-18 WHB		18" x 11J	280/660-18 DHG	280/660-18 WHB
Toyota GR Supra GT4 Evo 2	18" x 11J	280/660-18 DHG	280/660-18 WHB		18" x 11J	280/660-18 DHG	280/660-18 WHB

GENERAL INFORMATION

OPERATING INSTRUCTIONS	
Before each run	
Pressures	- The tyre pressure must always be over the declared **MINIMUM INFLATION PRESSURE** defined within this book. - Cold tyre pressures must always be set in order that the hot target pressure stated within this book is reached. - Dry air is recommended to inflate tyres to avoid sudden changes in pressure due to humidity.

After each run	
Temperatures	- the offset in measured garage bulk temperature between the inside and outside of the tyre should not exceed 20°C for optimum tyre performance (see Figure 1 below)
	- the offset in measured garage bulk temperatures between front and rear axle should not exceed 25°C for optimum tyre performance (see Figure 1 below)
Pressures	- the measured garage pressure should be not less than the hot target value stated within this book
	- **all pressure limitations (minimum and hot) stated in this book will be monitored during each event, and modified if deemed necessary.**
Figure 1	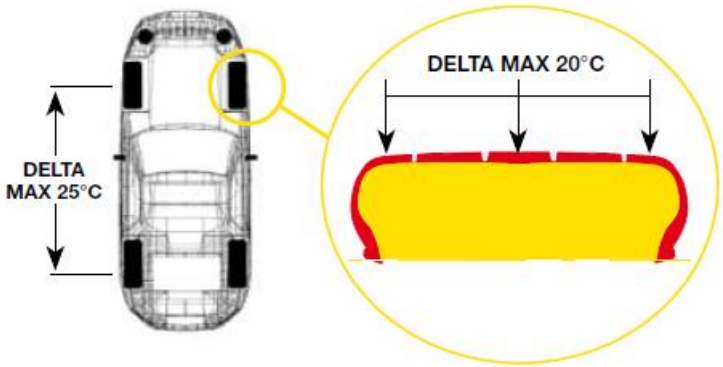

TYRE PRESSURE MANAGEMENT

INFLATION PRESSURE

Tyre pressure increases with temperature (while preheating and when car is running) following the theoretical line shown in *Figure 2,* below.

To inflate tyres in warm-to-hot ambient conditions (air temperature above 25°C), the dashed line in *Figure 2* shows the correct pressure value.

Figure 2:

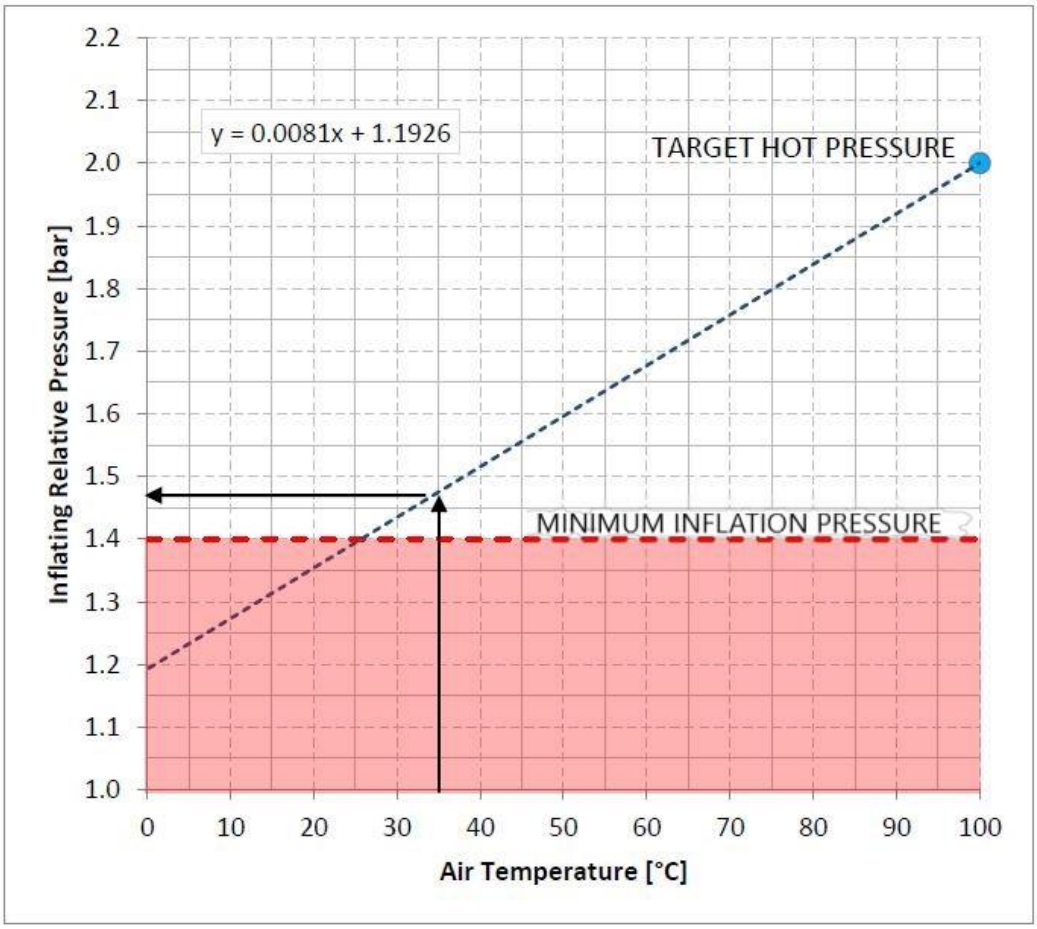

If the ambient temperature is below 25°C the minimum cold pressure limit is encountered.

The car should not be released onto the circuit if the pressure is below the Minimum Inflation Pressure.

TYRE PRESSURE MANAGEMENT

INFLATION PRESSURE ADJUSTMENTS

In cold conditions, after one lap or as soon as the tyres have warmed-up, a pressure adjustment may be required in order to prevent exceeding target hot pressure.

The pressure adjustment for warmed tyres can be calculated as follows:

$$T_m[°C] = \frac{(P_m[bar] + 1{,}013) \cdot (T_i[°C] + 273{,}15)}{2{,}413} - 273{,}15$$

$$\Delta P\,[bar] = P_m[bar] - \frac{3{,}013}{373{,}15} \cdot (T_m[°C] + 273{,}15) + 1{,}013$$

Ti [°C]:	inflating air ambient temperature
Pm [bar]:	measured pressure (after warm-up)
Tm [°C]:	calculated air temperature (after warm-up)
ΔP [bar]:	calculated adjustment for pressure

- Always note the ambient temperature when inflating cold tyres to 1.40 bar
- Measure the tyre pressures after warm-up

Figure 3:

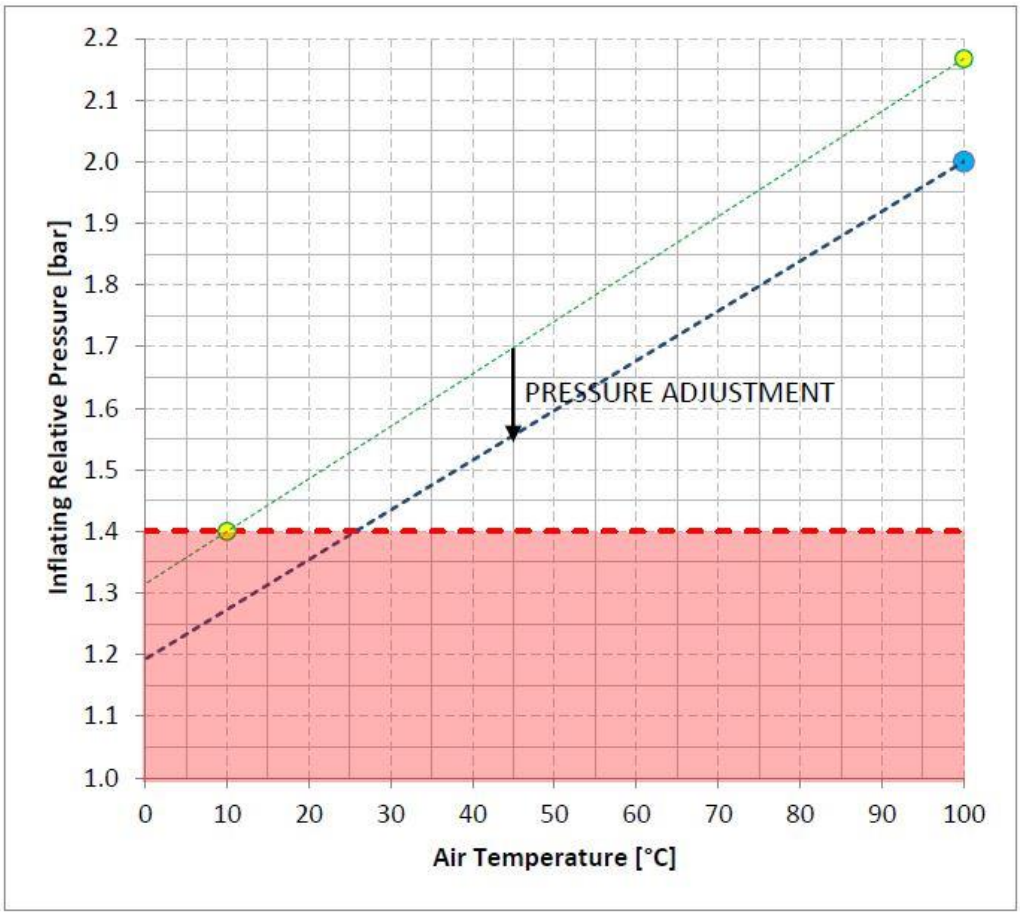

RUNNING PARAMETERS - GT AMERICA

GT3 | GT2** | GT4 | GINETTA CUP | PORSCHE 992 GT3 CUP (INV)							
	MINIMUM PRESSURE (bar/psi)			HOT PRESSURE TARGET (bar/psi)			MAXIMUM STATIC CAMBER (deg)
	Slick tyre	*Wet tyre*		*Slick tyre*	*Wet tyre*		
Front	*1.30/18.9*	*1.30/18.9*		*2.00/29.0*	*2.00/29.0*		*-4.0*
Rear	*1.30/18.9*	*1.30/18.9*		*2.00/29.0*	*2.00/29.0*		*-3.5*

***= Excluding Porsche 911 GT2 RS Clubsport (non Evo). See below.*

PORSCHE 911 GT2 RS CLUBSPORT							
	MINIMUM PRESSURE (bar/psi)			HOT PRESSURE TARGET (bar/psi)			MAXIMUM STATIC CAMBER (deg)
	Slick tyre	*Wet tyre*		*Slick tyre*	*Wet tyre*		
Front	*1.30/18.9*	*1.30/18.9*		*2.00/29.0*	*2.00/29.0*		*-3.5*
Rear	*1.30/18.9*	*1.30/18.9*		*2.00/29.0*	*2.00/29.0*		*-3.0*

LAMBORGHINI HURACAN SUPER TROFEO (INV)							
	MINIMUM PRESSURE (bar/psi)			HOT PRESSURE TARGET (bar/psi)			MAXIMUM STATIC CAMBER (deg)
	Slick tyre	*Wet tyre*		*Slick tyre*	*Wet tyre*		
Front	*1.50/22.0*	*1.50/22.0*		*1.90/27.5*	*2.20/32.0*		*-3.0*
Rear	*1.50/22.0*	*1.50/22.0*		*1.90/27.5*	*2.20/32.0*		*-3.0*

FERRARI 296 CHALLENGE (INV)							
	MINIMUM PRESSURE (bar/psi)			HOT PRESSURE TARGET (bar/psi)			MAXIMUM STATIC CAMBER (deg)
	Slick tyre	*Wet tyre*		*Slick tyre*	*Wet tyre*		
Front	*1.40/20.4*	*1.70/25.0*		*1.90/27.5*	*2.10/30.5*		*-3.5*
Rear	*1.40/20.4*	*1.70/25.0*		*1.90/27.5*	*2.10/30.5*		*-3.0*

FERRARI 488 CHALLENGE (INV)							
	MINIMUM PRESSURE (bar/psi)			HOT PRESSURE TARGET (bar/psi)			MAXIMUM STATIC CAMBER (deg)
	Slick tyre	*Wet tyre*		*Slick tyre*	*Wet tyre*		
Front	*1.40/20.4*	*1.70/25.0*		*1.90/27.5*	*2.10/30.5*		*-4.4*
Rear	*1.40/20.4*	*1.70/25.0*		*1.90/27.5*	*2.10/30.5*		*-3.3*

RUNNING PARAMETERS - GT AMERICA

NOTES
• Please be aware that not complying with the above running parameters will expose the product to excessive levels of mechanical stress that could affect the integrity of the product.
• Particular care will be needed for any tyres used at previous events, especially those that have already been used outside of our parameters.
• Driving style during the out lap is of utmost importance to minimise the stress generated over the carcass of the tyres. We recommend that drivers always avoid aggressive kerb usage, particularly until the tyres have reached an internal pressure close to their optimum running pressure.
• We are confident you will understand the above requirements and, if necessary, will adjust your procedures accordingly.
• These recommendations are valid unless the tyres have been damaged.
• To avoid any damage to the tyres caused by air leaks, we recommend the following: - use metal valve bodies instead of rubber ones; - check the fixing of the valves and their seal frequently; - check the valve core; - use metal valve caps with integral rubber o-ring seal.

Please note: Teams should always ensure that they refer to the Championship's regulations and Balance of Performance documents regarding tyre pressures and static negative camber limits, if applicable.

STATIC MEASUREMENT DEFINITIONS

STATIC MEASUREMENTS	
The static measurements within this book are provided for each combination of tyre-rim size. Geometric measurements are taken with the tyre fitted on a rim, inflated to the standard Pirelli running pressure. Please see the individual Tyre Data Books for the pressure per tyre.	
Circumference **πD** [mm]	*length along the middle tread line of the tyre;*
Max width **C** [mm]	*maximum width of the tyre;*
Tread width **Cb** [mm]	*width of the tread.*

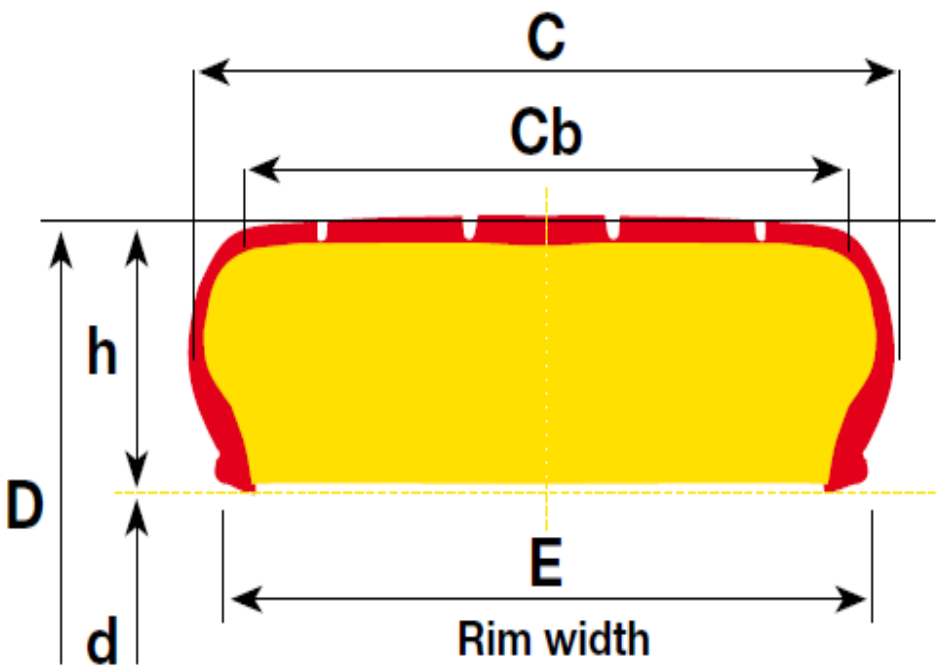

A full characterisation of deflection vs. vertical load at different pressures is given; measurements are taken at two different camber levels (0° and -3.0°) for slick tyres.

DYNAMIC MEASUREMENT DEFINITIONS

DYNAMIC MEASUREMENTS	
Tyre dynamic characterisation describes changes in dimensions due to speed and vertical load. All measurements are made without any applied camber (0°). Please see the individual Tyre Data Books for the pressure per tyre.	
Loaded radius **L.R.** [mm]	*distance between the wheel center and the ground;*
Rolling radius **R.R.** [mm]	*the length travelled by the tyre for each wheel's revolution divided by 2 π.*

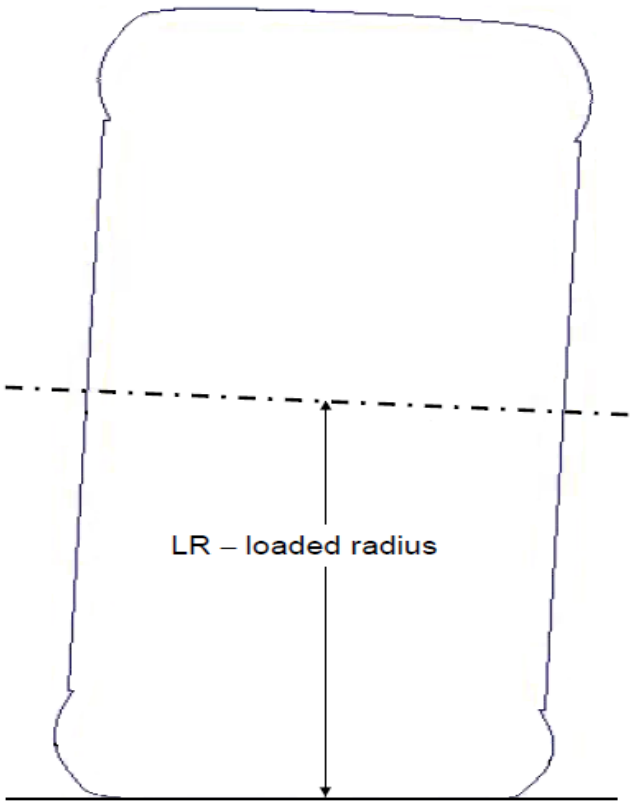

TYRE FITTING - GT AMERICA

FITTING INSTRUCTIONS FOR DHG SPECIFICATIONS

For **DHG** specification products, tyres must be fitted in accordance with the sidewall markings on each tyre. The yellow FIA barcode should be positioned on the outside and the red FIA barcode on the inside. Pirelli personnel will only fit tyres in this prescribed way. Any failure to adhere to this may change the characteristics of the product.
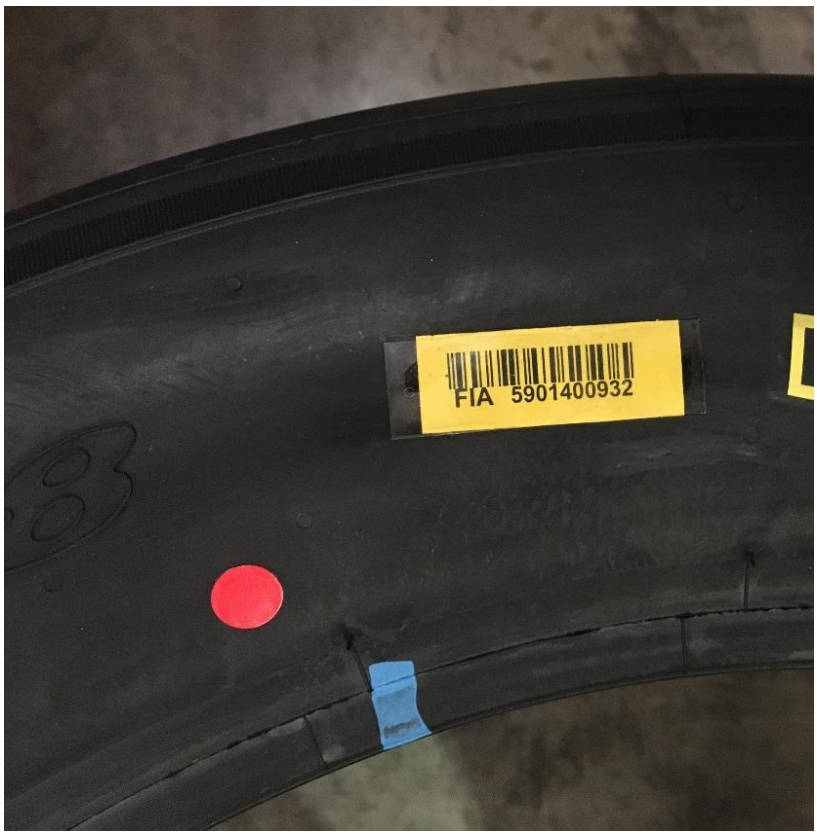
Please note that the red dot on the sidewall should be positioned next to the valve when fitting, for balance reasons.