TYRE DATA BOOKLET

260/650-18 DHG
260/650-18 WHB
2025 - 2026

CONTENTS:

1: INTRODUCTION

2: STATIC DIMENSIONS (DHG/WHB)

3: DYNAMIC MEASUREMENTS (DHG)

4: DYNAMIC MEASUREMENTS (WHB)

5: STATIC RADIAL DEFLECTION (DHG)

6: STATIC RADIAL DEFLECTION (WHB)

INTRODUCTION

INTRODUCTION
This document provides the user with technical information regarding several aspects of the tyre characteristics. The data was acquired using indoor testing methods on physical tyres. For individual car fitments, usage guidelines and prescriptions for camber and pressure please refer to the relevent Pirelli Technical Booklet, which is included as part of this Pirelli Data Package.

STATIC DIMENSIONS

Slick Tyres				
Size & Fitment	Nominal Weight (kilograms)	Max Width **(C)** (mm)	Circumference **(πD)** (mm)	Tread Width **(Cb)** (mm)
260/650-18 DHG 18"x10.0J	9.4	271	2035	247

Wet Tyres				
Size & Fitment	Nominal Weight (kilograms)	Max Width **(C)** (mm)	Circumference **(πD)** (mm)	Tread Width **(Cb)** (mm)
260/650-18 WHB 18"x10.0J	10.4	270	2039	246

DYNAMIC MEASUREMENTS @ 2.0bar (29psi), CA 0.0°

260/650-18x10.0J DHG

LOADED RADIUS

SPEED [km/h] \ LOAD [kg]	150	300	450	600	750
20	318.3	313.1	307.9	302.8	297.8
60	318.7	313.6	308.5	303.4	298.2
100	319.4	314.4	309.3	304.2	299.0
140	320.2	315.4	310.4	305.3	300.1
180	321.3	316.6	311.7	306.7	301.5
220	322.6	318.0	313.2	308.3	303.2
260	324.0	319.6	315.0	310.2	305.2

ROLLING RADIUS

SPEED [km/h] \ LOAD [kg]	150	300	450	600	750
20	318.5	317.4	316.7	316.2	315.9
60	318.8	317.6	316.9	316.5	316.1
100	319.2	318.1	317.4	316.9	316.6
140	320.0	318.8	318.1	317.7	317.3
180	320.9	319.8	319.1	318.7	318.3
220	322.1	321.0	320.3	319.9	319.5
260	323.4	322.4	321.8	321.4	321.1

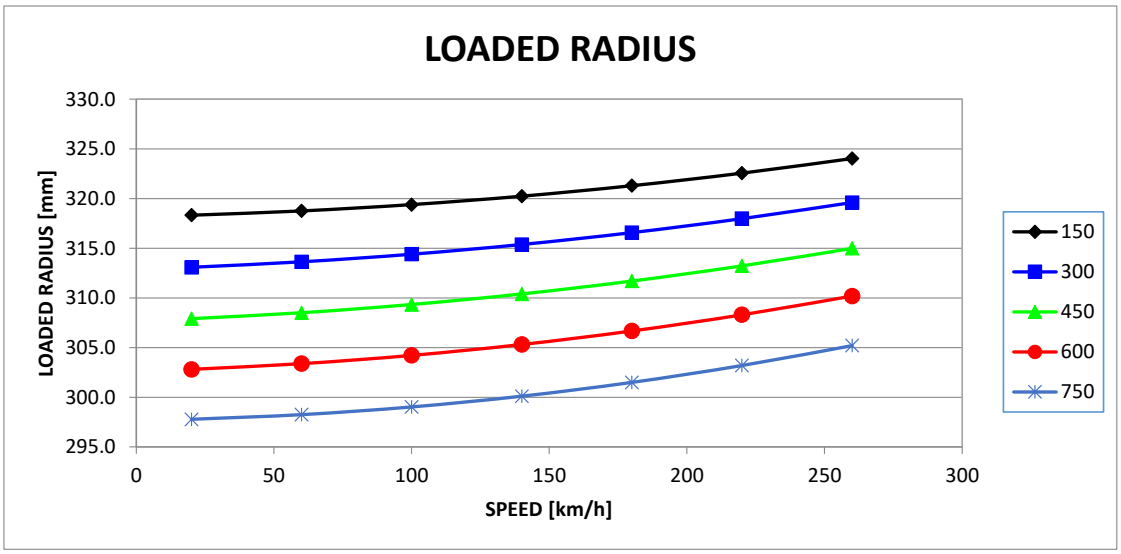

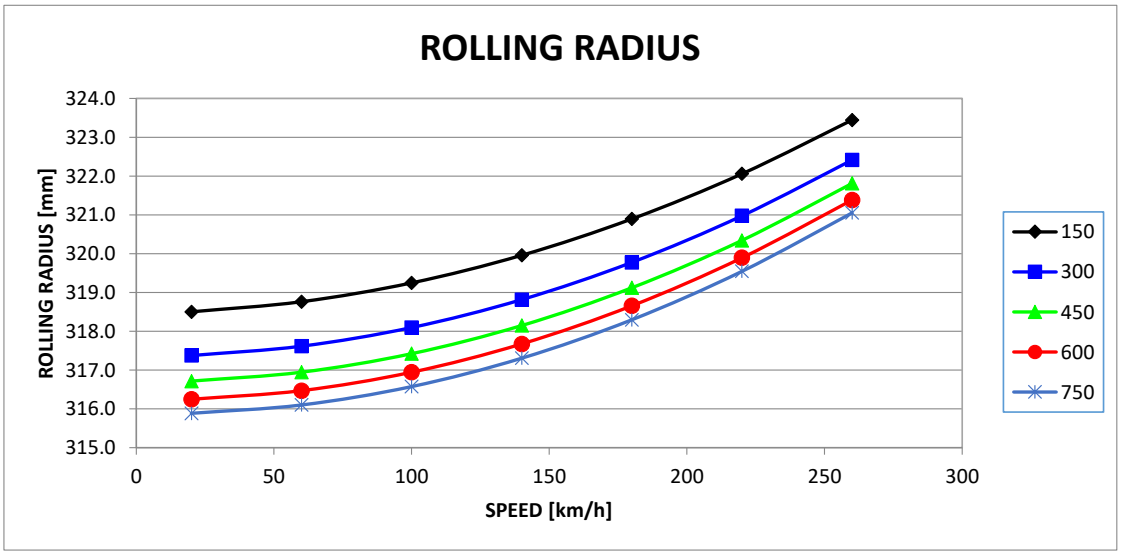

DYNAMIC MEASUREMENTS @ 1.8bar (26psi), CA 0.0°

260/650-18x10.0J DHG

LOADED RADIUS

SPEED [km/h] \ LOAD [kg]	150	300	450	600	750
20	317.9	312.1	306.5	301.0	295.6
60	318.4	312.7	307.2	301.6	296.1
100	319.0	313.6	308.1	302.6	297.0
140	319.9	314.6	309.2	303.7	298.1
180	321.1	315.9	310.6	305.2	299.6
220	322.4	317.4	312.2	306.9	301.4
260	324.0	319.1	314.0	308.8	303.4

ROLLING RADIUS

SPEED [km/h] \ LOAD [kg]	150	300	450	600	750
20	318.4	317.3	316.6	316.1	315.8
60	318.7	317.5	316.8	316.4	316.0
100	319.2	318.0	317.3	316.9	316.5
140	319.9	318.8	318.1	317.6	317.2
180	320.9	319.8	319.1	318.6	318.2
220	322.1	321.0	320.3	319.9	319.5
260	323.6	322.5	321.9	321.4	321.1

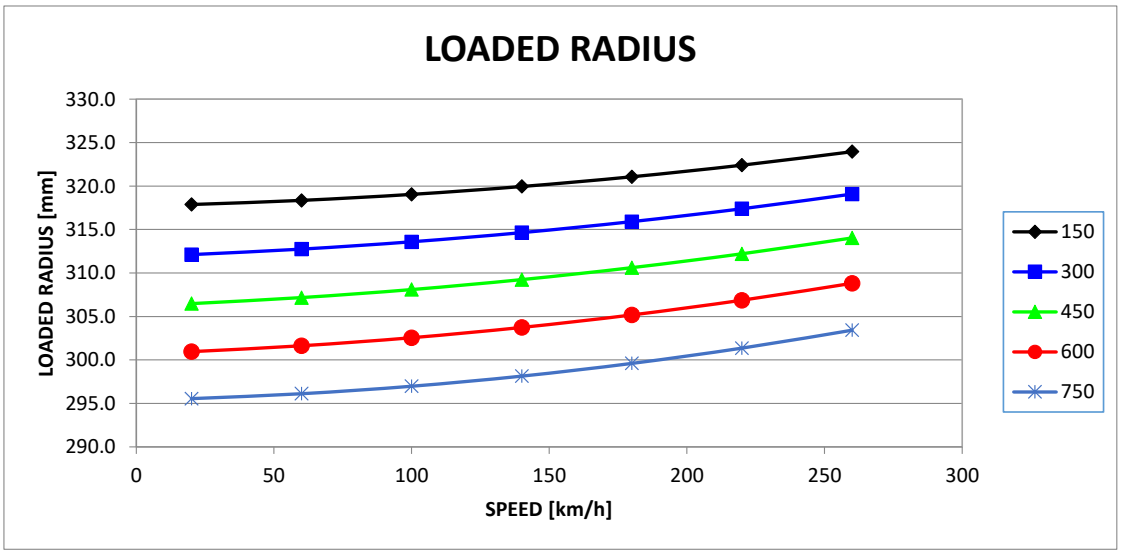

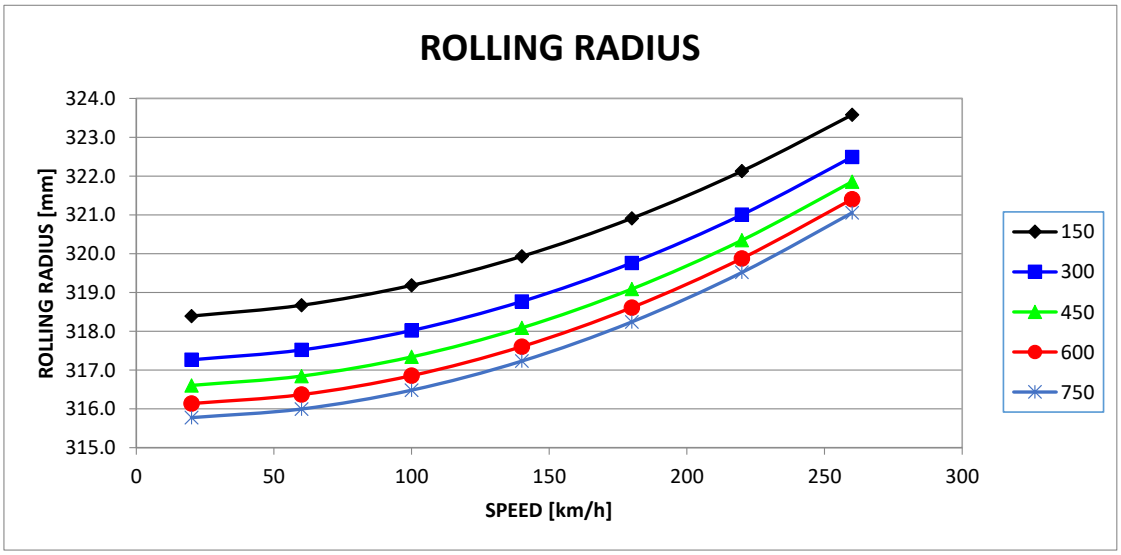

DYNAMIC MEASUREMENTS @ 2.0bar (29psi), CA 0.0°

260/650-18x10.0J WHB

LOADED RADIUS

SPEED [km/h] \ LOAD [kg]	150	300	450	600	750
20	320.3	314.9	309.6	304.4	299.4
60	320.9	315.6	310.4	305.3	300.3
100	321.8	316.6	311.4	306.4	301.4
140	322.9	317.8	312.7	307.7	302.8
180	324.3	319.3	314.3	309.4	304.5
220	325.9	321.0	316.1	311.3	306.4
260	327.7	323.0	318.2	313.4	308.5

ROLLING RADIUS

SPEED [km/h] \ LOAD [kg]	150	300	450	600	750
20	320.4	318.7	317.7	317.0	316.4
60	320.8	319.1	318.1	317.4	316.8
100	321.5	319.8	318.8	318.1	317.5
140	322.5	320.8	319.8	319.1	318.5
180	323.7	322.0	321.1	320.4	319.8
220	325.3	323.6	322.6	322.0	321.4
260	327.1	325.5	324.5	323.8	323.3

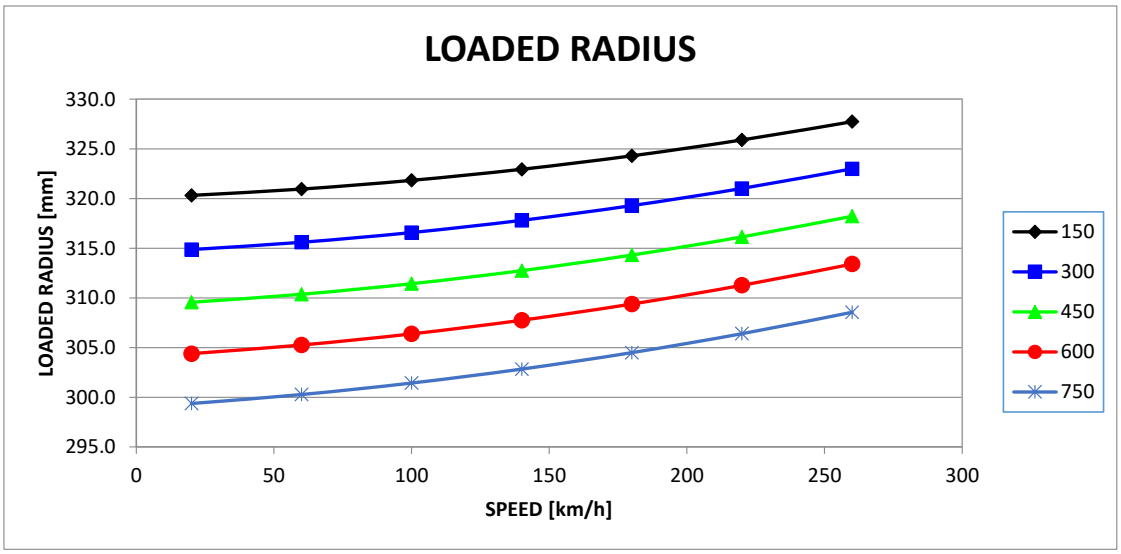

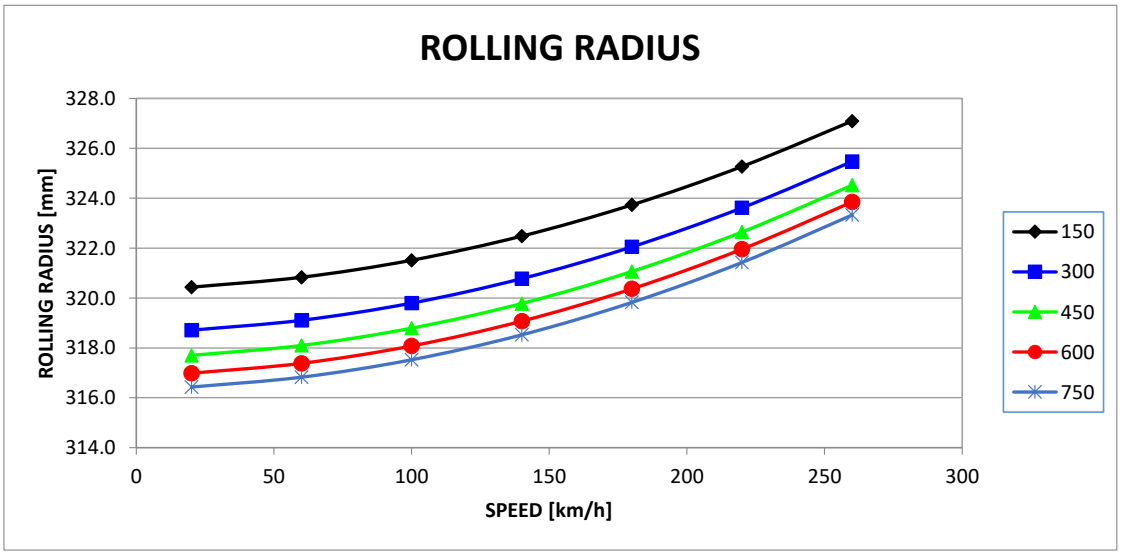

DYNAMIC MEASUREMENTS @ 1.8bar (26psi), CA 0.0°

260/650-18x10.0J WHB

LOADED RADIUS

SPEED [km/h] \ LOAD [kg]	150	300	450	600	750
20	319.3	313.4	307.7	302.2	296.9
60	320.0	314.2	308.6	303.1	297.8
100	320.9	315.2	309.7	304.3	298.9
140	322.1	316.6	311.1	305.7	300.4
180	323.5	318.1	312.8	307.5	302.2
220	325.2	320.0	314.8	309.5	304.3
260	327.2	322.1	317.0	311.9	306.7

ROLLING RADIUS

SPEED [km/h] \ LOAD [kg]	150	300	450	600	750
20	319.6	317.8	316.8	316.1	315.6
60	320.0	318.3	317.3	316.5	316.0
100	320.7	319.0	318.0	317.3	316.7
140	321.7	320.0	319.0	318.3	317.8
180	323.1	321.4	320.4	319.7	319.1
220	324.7	323.0	322.0	321.3	320.8
260	326.6	325.0	324.0	323.3	322.8

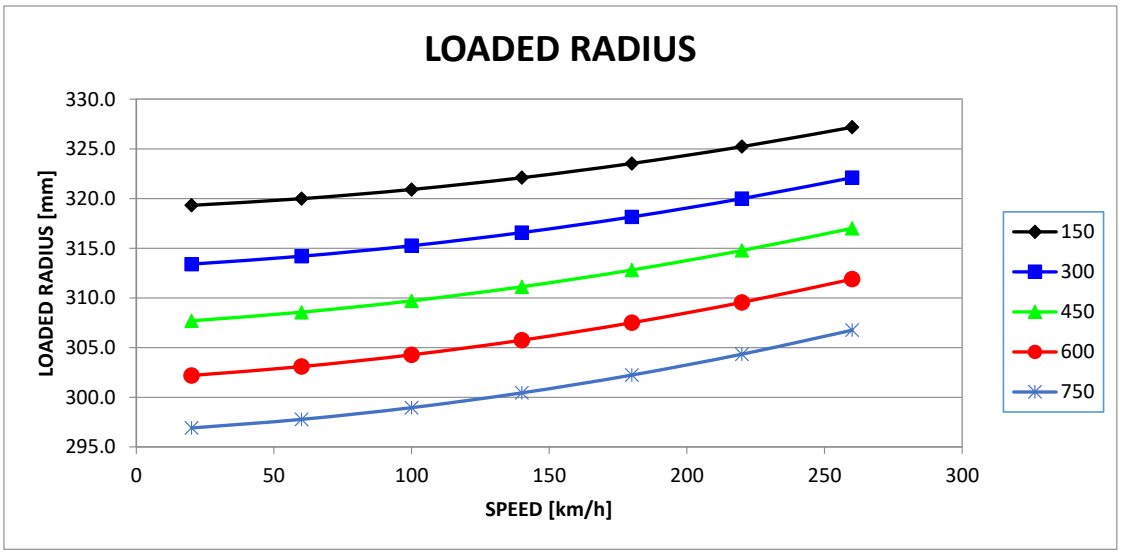

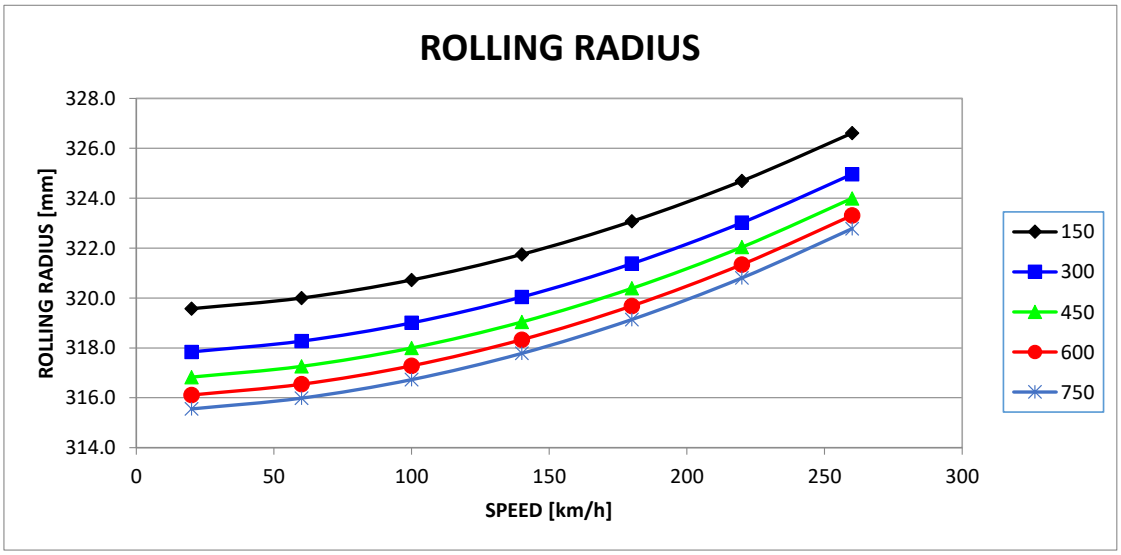

STATIC RADIAL DEFLECTION – 260/650-18x10.0J @ CA 0.0 ° DHG

Load [kg]	Inflation Pressure [bar]						
	2.6	2.4	2.2	2.0	1.8	1.6	1.4
0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
25	0.7	0.8	0.9	0.9	1.0	1.1	1.1
50	1.5	1.6	1.7	1.8	1.9	2.1	2.3
75	2.2	2.4	2.6	2.7	2.9	3.2	3.4
100	2.9	3.1	3.4	3.6	3.8	4.2	4.5
125	3.6	3.9	4.2	4.5	4.7	5.2	5.6
150	4.3	4.7	5.0	5.3	5.7	6.2	6.7
175	5.0	5.4	5.8	6.2	6.6	7.2	7.8
200	5.7	6.2	6.6	7.0	7.5	8.2	8.8
225	6.4	6.9	7.4	7.8	8.3	9.1	9.9
250	7.1	7.6	8.2	8.7	9.2	10.1	10.9
275	7.8	8.4	8.9	9.5	10.1	11.0	11.9
300	8.5	9.1	9.7	10.3	10.9	12.0	12.9
325	9.1	9.8	10.4	11.1	11.8	12.9	13.9
350	9.8	10.5	11.2	11.9	12.6	13.8	14.9
375	10.5	11.2	11.9	12.7	13.5	14.7	15.9
400	11.1	11.9	12.6	13.4	14.3	15.6	16.9
425	11.8	12.6	13.4	14.2	15.1	16.5	17.9
450	12.4	13.3	14.1	15.0	15.9	17.4	18.8
475	13.1	13.9	14.8	15.7	16.7	18.3	19.8
500	13.7	14.6	15.5	16.5	17.5	19.1	20.7
525	14.4	15.3	16.2	17.2	18.3	20.0	21.6
550	15.0	16.0	16.9	18.0	19.1	20.8	22.6
575	15.6	16.6	17.6	18.7	19.9	21.7	23.5
600	16.3	17.3	18.2	19.4	20.7	22.5	24.4
625	16.9	17.9	18.9	20.1	21.4	23.3	25.3
650	17.5	18.6	19.6	20.8	22.2	24.2	26.2
675	18.1	19.2	20.3	21.6	23.0	25.0	27.1
700	18.7	19.9	20.9	22.3	23.7	25.8	28.0
725	19.3	20.5	21.6	23.0	24.5	26.6	28.8
750	19.9	21.1	22.2	23.6	25.2	27.4	29.7
775	20.5	21.7	22.9	24.3	25.9	28.2	30.6
800	21.1	22.4	23.5	25.0	26.7	29.0	31.4

STATIC RADIAL DEFLECTION – 260/650-18x10.0J @ CA 0.0° DHG

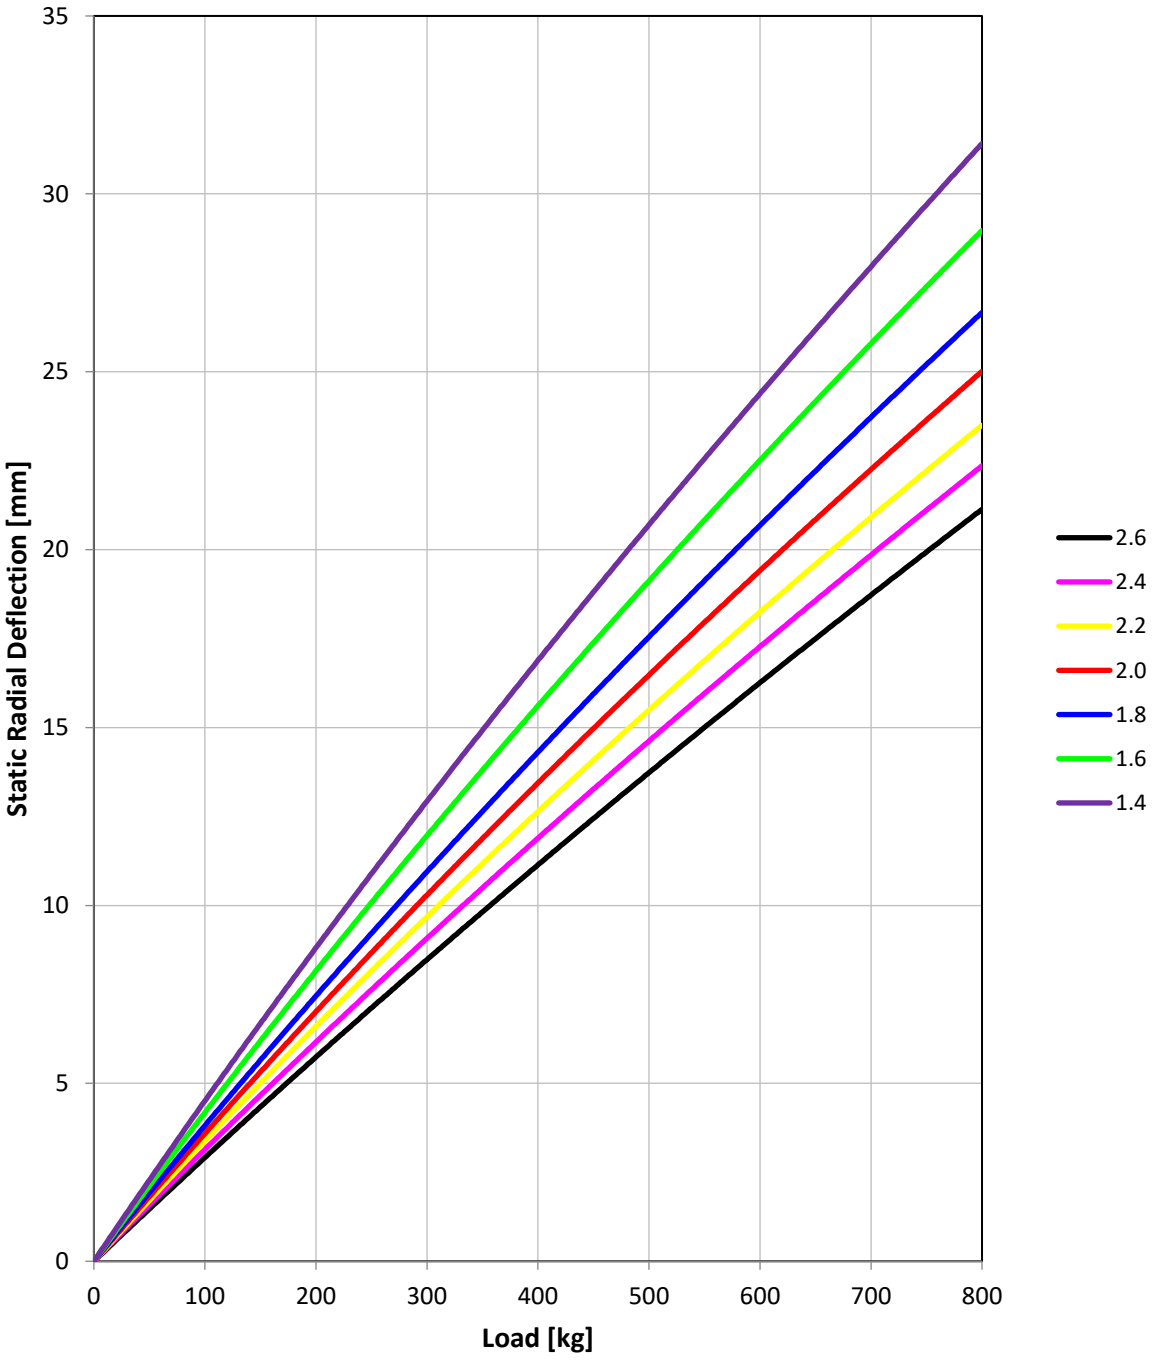

STATIC RADIAL DEFLECTION – 260/650-18x10.0J @ CA -3.0 ° DHG

Load [kg]	Inflation Pressure [bar]						
	2.6	2.4	2.2	2.0	1.8	1.6	1.4
0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
25	0.9	0.9	1.0	1.0	1.1	1.2	1.3
50	1.7	1.8	2.0	2.0	2.2	2.4	2.6
75	2.6	2.7	2.9	3.0	3.2	3.6	3.9
100	3.4	3.6	3.8	4.0	4.3	4.7	5.1
125	4.2	4.5	4.8	4.9	5.3	5.8	6.4
150	5.0	5.3	5.7	5.8	6.3	6.9	7.6
175	5.8	6.2	6.5	6.8	7.3	8.0	8.7
200	6.6	7.0	7.4	7.7	8.3	9.1	9.9
225	7.4	7.8	8.3	8.6	9.3	10.1	11.0
250	8.1	8.6	9.1	9.5	10.2	11.1	12.1
275	8.9	9.4	10.0	10.3	11.1	12.1	13.2
300	9.6	10.2	10.8	11.2	12.1	13.1	14.2
325	10.4	10.9	11.6	12.0	13.0	14.1	15.3
350	11.1	11.7	12.4	12.9	13.9	15.1	16.3
375	11.8	12.4	13.2	13.7	14.8	16.0	17.3
400	12.5	13.2	13.9	14.5	15.6	17.0	18.4
425	13.2	13.9	14.7	15.3	16.5	17.9	19.3
450	13.9	14.6	15.5	16.1	17.4	18.8	20.3
475	14.6	15.3	16.2	16.9	18.2	19.7	21.3
500	15.3	16.0	16.9	17.7	19.0	20.6	22.2
525	16.0	16.7	17.7	18.5	19.9	21.5	23.2
550	16.6	17.4	18.4	19.3	20.7	22.4	24.1
575	17.3	18.1	19.1	20.0	21.5	23.2	25.0
600	17.9	18.8	19.8	20.8	22.3	24.1	25.9
625	18.6	19.4	20.5	21.5	23.1	24.9	26.8
650	19.2	20.1	21.2	22.3	23.9	25.7	27.7
675	19.9	20.7	21.9	23.0	24.7	26.6	28.6
700	20.5	21.4	22.6	23.7	25.4	27.4	29.4
725	21.1	22.0	23.2	24.5	26.2	28.2	30.3
750	21.7	22.7	23.9	25.2	26.9	29.0	31.1
775	22.3	23.3	24.6	25.9	27.7	29.8	32.0
800	22.9	23.9	25.2	26.6	28.4	30.6	32.8

STATIC RADIAL DEFLECTION – 260/650-18x10.0J @ CA -3.0° DHG

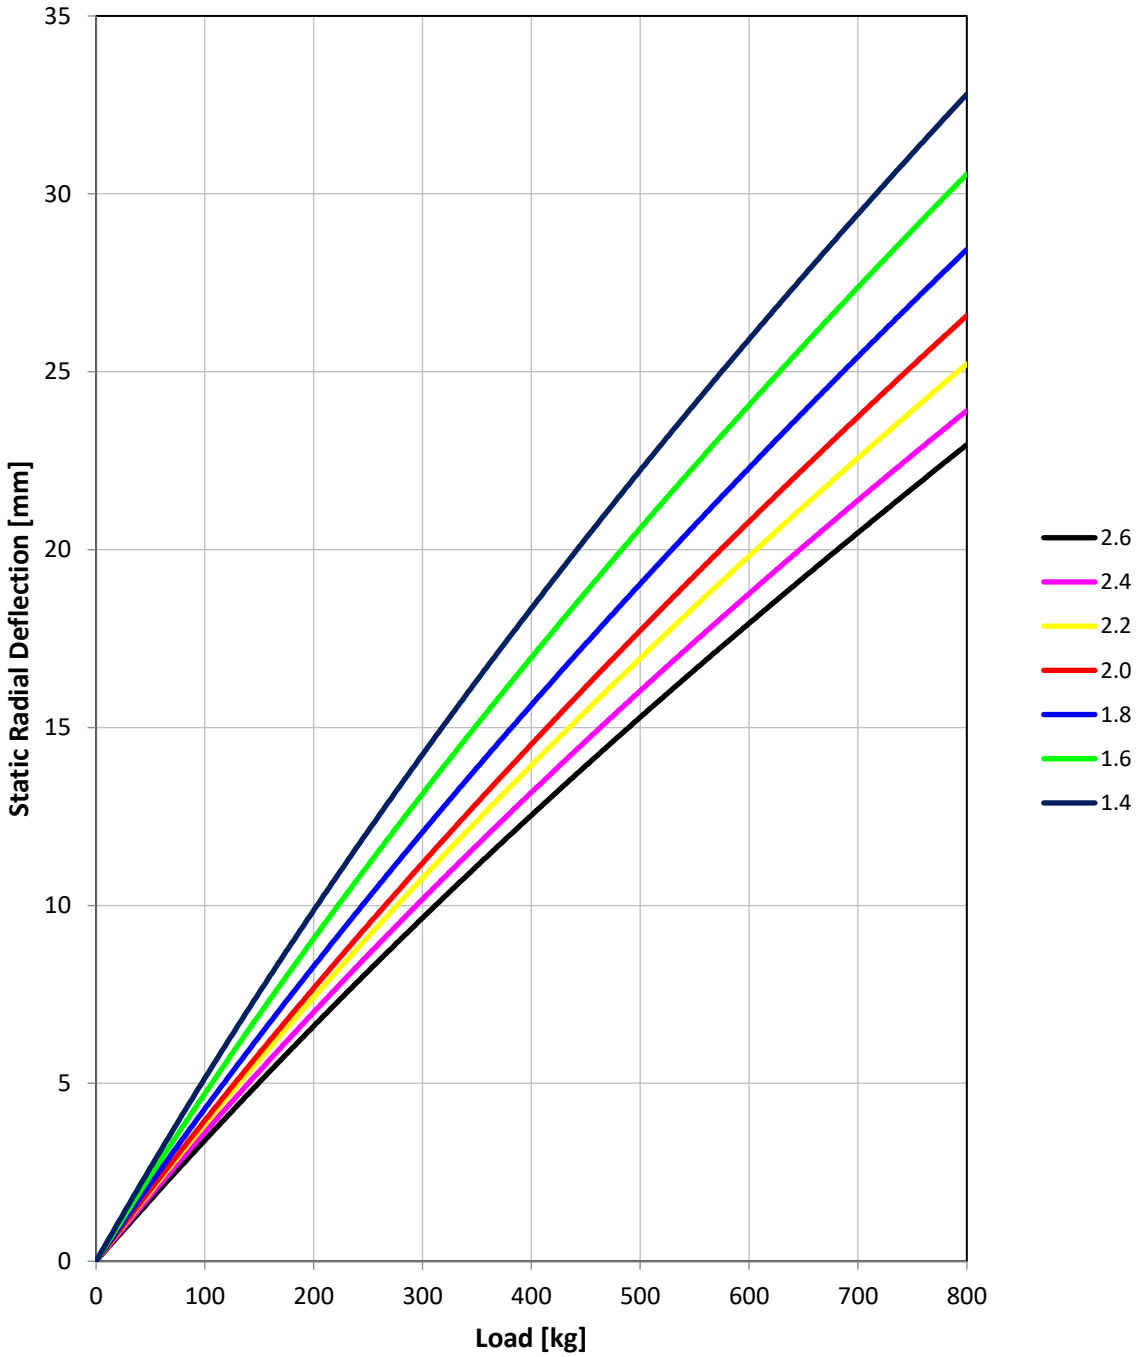

STATIC RADIAL DEFLECTION – 260/650-18x10.0J @ CA 0.0 ° WHB

Load [kg]	Inflation Pressure [bar]						
	2.6	2.4	2.2	2.0	1.8	1.6	1.4
0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
25	0.8	0.8	0.9	0.9	1.0	1.1	1.2
50	1.5	1.7	1.7	1.9	2.0	2.2	2.4
75	2.3	2.5	2.5	2.8	2.9	3.2	3.5
100	3.0	3.3	3.3	3.7	3.9	4.3	4.7
125	3.8	4.1	4.2	4.6	4.8	5.3	5.8
150	4.5	4.9	5.0	5.4	5.8	6.3	6.9
175	5.2	5.6	5.7	6.3	6.7	7.2	7.9
200	5.9	6.4	6.5	7.1	7.6	8.2	9.0
225	6.6	7.1	7.3	8.0	8.5	9.2	10.0
250	7.3	7.8	8.0	8.8	9.3	10.1	11.0
275	8.0	8.6	8.8	9.6	10.2	11.0	12.0
300	8.7	9.3	9.5	10.4	11.1	11.9	13.0
325	9.4	10.0	10.3	11.2	11.9	12.8	14.0
350	10.1	10.7	11.0	11.9	12.7	13.7	14.9
375	10.8	11.4	11.7	12.7	13.5	14.6	15.9
400	11.4	12.0	12.4	13.5	14.4	15.5	16.8
425	12.1	12.7	13.1	14.2	15.2	16.3	17.7
450	12.7	13.4	13.8	14.9	16.0	17.2	18.6
475	13.4	14.0	14.5	15.7	16.7	18.0	19.5
500	14.0	14.7	15.2	16.4	17.5	18.8	20.4
525	14.6	15.3	15.9	17.1	18.3	19.6	21.2
550	15.3	15.9	16.6	17.8	19.1	20.4	22.1
575	15.9	16.6	17.2	18.5	19.8	21.2	22.9
600	16.5	17.2	17.9	19.2	20.6	22.0	23.8
625	17.1	17.8	18.5	19.9	21.3	22.8	24.6
650	17.7	18.4	19.2	20.6	22.0	23.6	25.4
675	18.3	19.0	19.8	21.2	22.8	24.3	26.2
700	18.9	19.6	20.5	21.9	23.5	25.1	27.0
725	19.5	20.2	21.1	22.6	24.2	25.9	27.8
750	20.1	20.8	21.7	23.2	24.9	26.6	28.6
775	20.7	21.4	22.4	23.9	25.6	27.3	29.4
800	21.3	21.9	23.0	24.5	26.3	28.1	30.2

STATIC RADIAL DEFLECTION – 260/650-18x10.0J @ CA 0.0° WHB

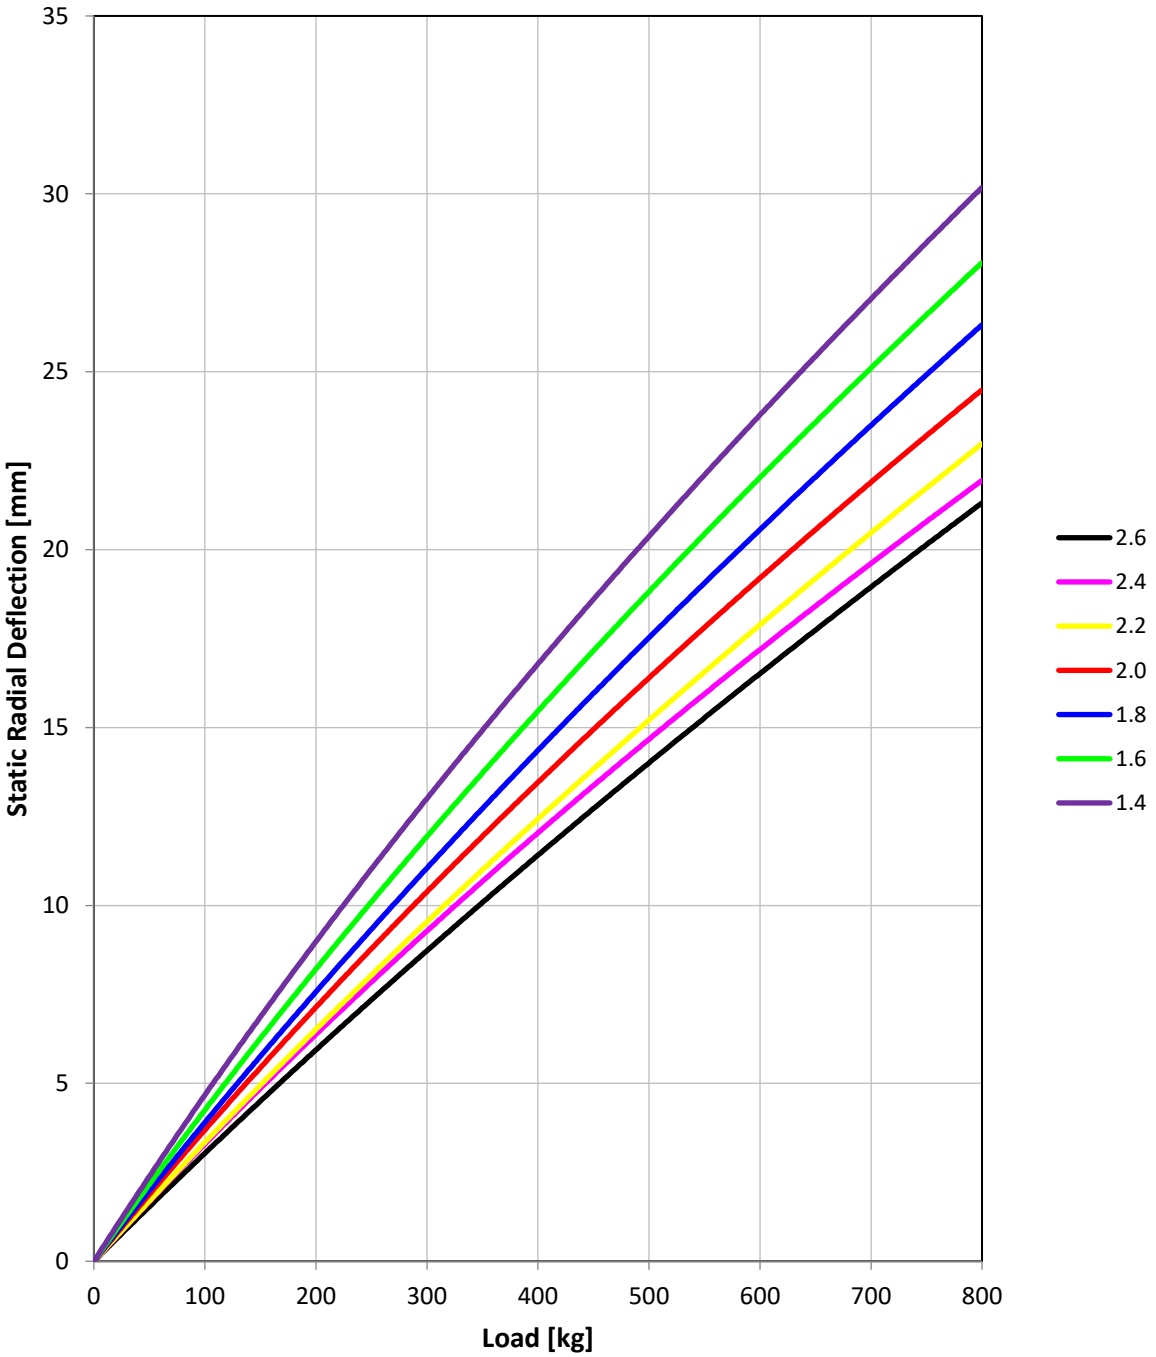

STATIC RADIAL DEFLECTION – 260/650-18x10.0J @ CA -3.0 ° WHB

Load [kg]	Inflation Pressure [bar]						
	2.6	2.4	2.2	2.0	1.8	1.6	1.4
0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
25	0.9	0.9	1.0	1.0	1.1	1.2	1.3
50	1.8	1.8	2.0	2.1	2.2	2.4	2.6
75	2.7	2.7	2.9	3.1	3.2	3.5	3.9
100	3.5	3.6	3.8	4.0	4.3	4.7	5.1
125	4.3	4.5	4.8	5.0	5.3	5.8	6.3
150	5.1	5.3	5.6	5.9	6.3	6.8	7.5
175	5.9	6.1	6.5	6.8	7.3	7.9	8.6
200	6.7	6.9	7.4	7.7	8.2	8.9	9.7
225	7.5	7.7	8.2	8.6	9.1	9.9	10.8
250	8.2	8.5	9.0	9.5	10.1	10.9	11.9
275	9.0	9.3	9.9	10.4	11.0	11.9	12.9
300	9.7	10.1	10.6	11.2	11.9	12.8	14.0
325	10.4	10.8	11.4	12.0	12.8	13.8	15.0
350	11.1	11.5	12.2	12.9	13.6	14.7	16.0
375	11.8	12.3	13.0	13.7	14.5	15.6	16.9
400	12.5	13.0	13.7	14.5	15.3	16.5	17.9
425	13.2	13.7	14.5	15.3	16.1	17.4	18.8
450	13.9	14.4	15.2	16.0	17.0	18.2	19.8
475	14.5	15.1	15.9	16.8	17.8	19.1	20.7
500	15.2	15.8	16.6	17.6	18.6	19.9	21.6
525	15.8	16.4	17.3	18.3	19.4	20.8	22.5
550	16.5	17.1	18.0	19.0	20.1	21.6	23.3
575	17.1	17.7	18.7	19.8	20.9	22.4	24.2
600	17.7	18.4	19.4	20.5	21.7	23.2	25.1
625	18.3	19.0	20.1	21.2	22.4	24.0	25.9
650	18.9	19.7	20.7	21.9	23.2	24.8	26.7
675	19.5	20.3	21.4	22.6	23.9	25.6	27.5
700	20.1	20.9	22.0	23.3	24.6	26.3	28.4
725	20.7	21.5	22.7	24.0	25.3	27.1	29.2
750	21.3	22.1	23.3	24.7	26.1	27.8	30.0
775	21.9	22.7	23.9	25.3	26.8	28.6	30.7
800	22.4	23.3	24.6	26.0	27.5	29.3	31.5
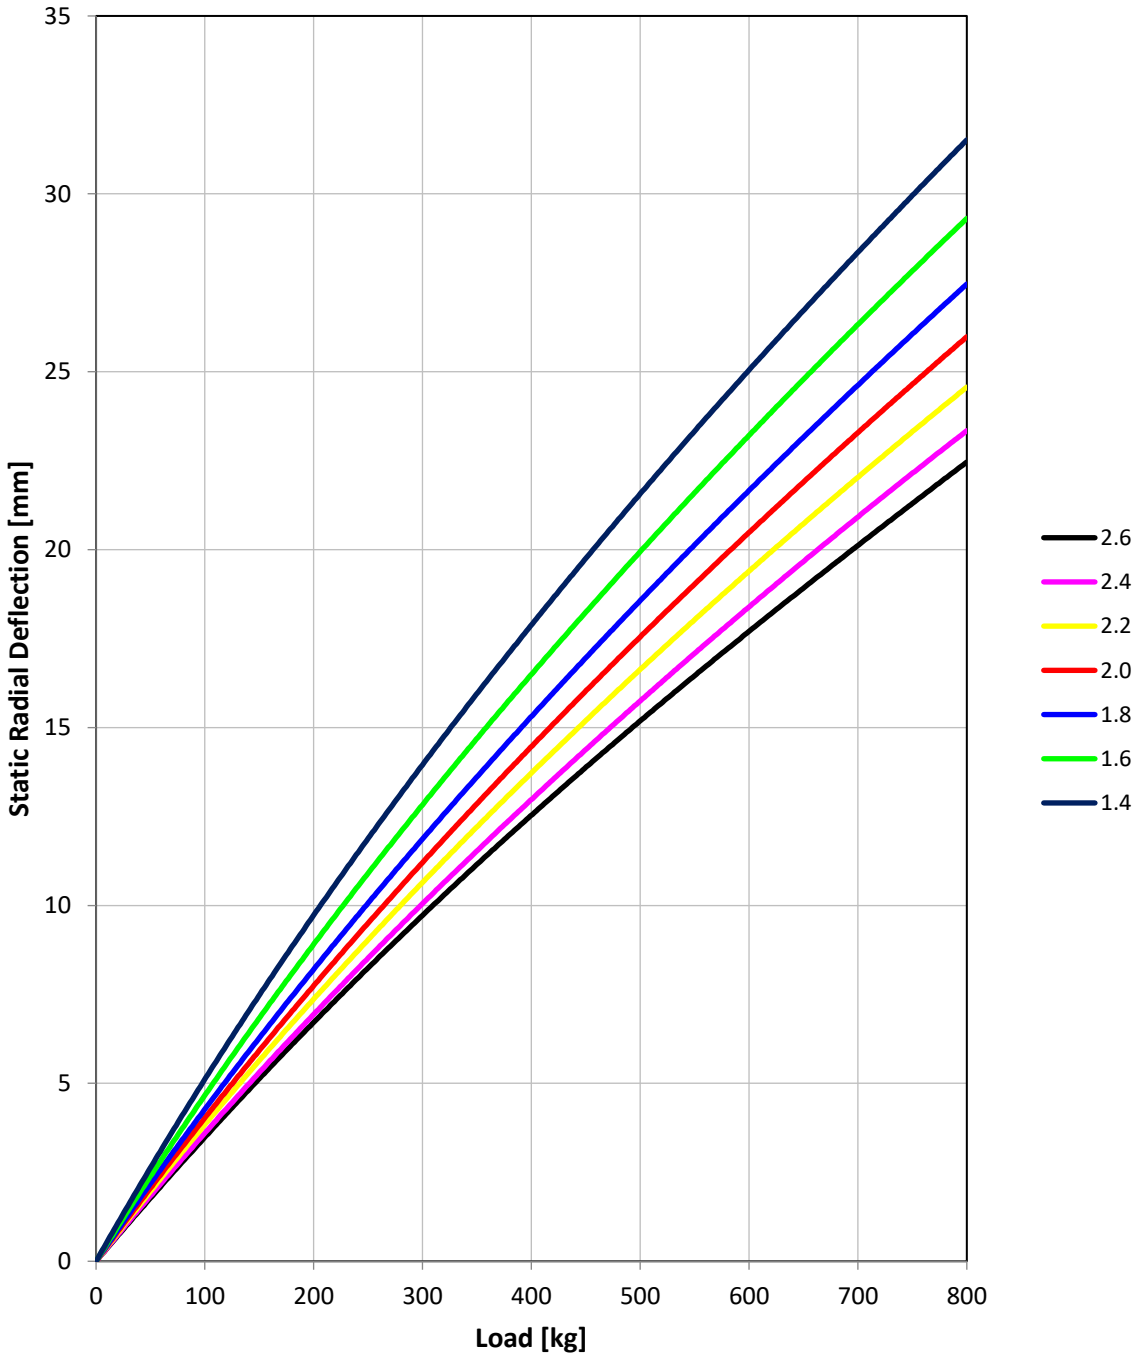
STATIC RADIAL DEFLECTION – 260/650-18x10.0J @ CA -3.0° WHB