TYRE DATA BOOKLET

265/660-18 DHHB

2022 - 2026

CONTENTS:

1: INTRODUCTION

2: STATIC DIMENSIONS (DHHB)

3: DYNAMIC MEASUREMENTS (DHHB)

4: STATIC RADIAL DEFLECTION (DHHB)

INTRODUCTION

INTRODUCTION
This document provides the user with technical information regarding several aspects of the tyre characteristics. The data was acquired using indoor testing methods on physical tyres. For individual car fitments, usage guidelines and prescriptions for camber and pressure please refer to the relevent Pirelli Technical Booklet, which is included as part of this Pirelli Data Package.

STATIC MEASUREMENTS

Slick Tyres				
Size & Fitment	Nominal Weight (kilograms)	Max Width **(C)** (mm)	Circumference **(πD)** (mm)	Tread Width **(Cb)** (mm)
265/660-18 DHHB 18"x10.0J	10.5	278	2097	238

DYNAMIC MEASUREMENTS @ 2.0bar (29psi), CA 0.0°

265/660-18x10.0J DHHB

LOADED RADIUS

SPEED [km/h] \ LOAD [kg]	150	300	450	600	750
20	327.6	322.4	317.1	311.8	306.5
60	328.2	323.0	317.7	312.4	307.2
100	329.1	323.9	318.6	313.4	308.2
140	330.2	325.0	319.9	314.7	309.6
180	331.5	326.5	321.4	316.4	311.3
220	333.1	328.1	323.2	318.3	313.4
260	334.9	330.1	325.3	320.5	315.8
280					
300					

ROLLING RADIUS

SPEED [km/h] \ LOAD [kg]	150	300	450	600	750
20	328.5	327.2	326.4	326.0	325.8
60	328.9	327.6	326.7	326.3	326.0
100	329.5	328.2	327.3	326.9	326.6
140	330.4	329.1	328.3	327.8	327.5
180	331.6	330.3	329.5	329.0	328.8
220	333.0	331.8	331.0	330.6	330.4
260	334.7	333.6	332.8	332.6	332.3
280					
300					

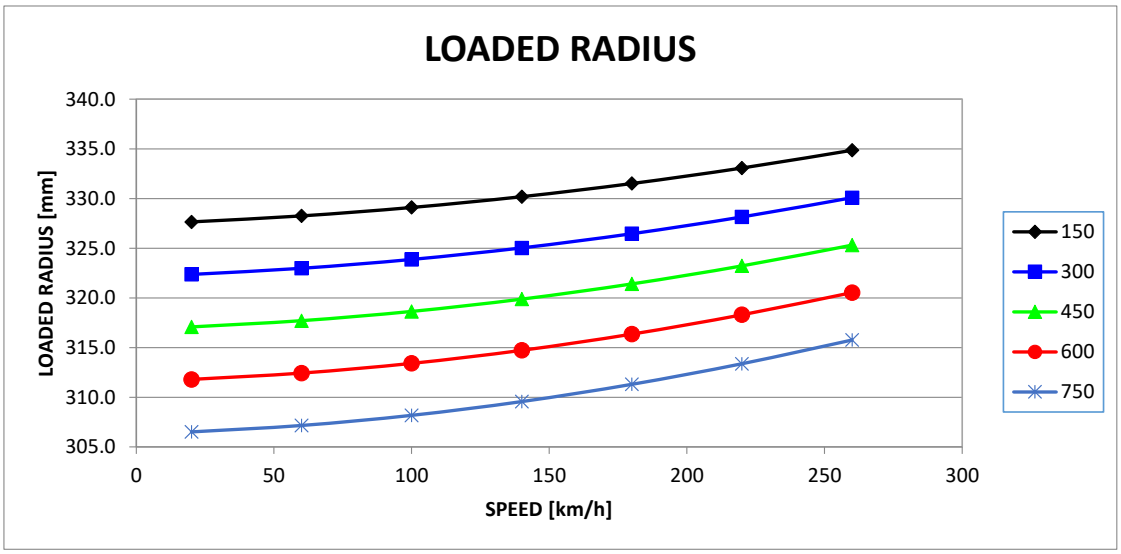

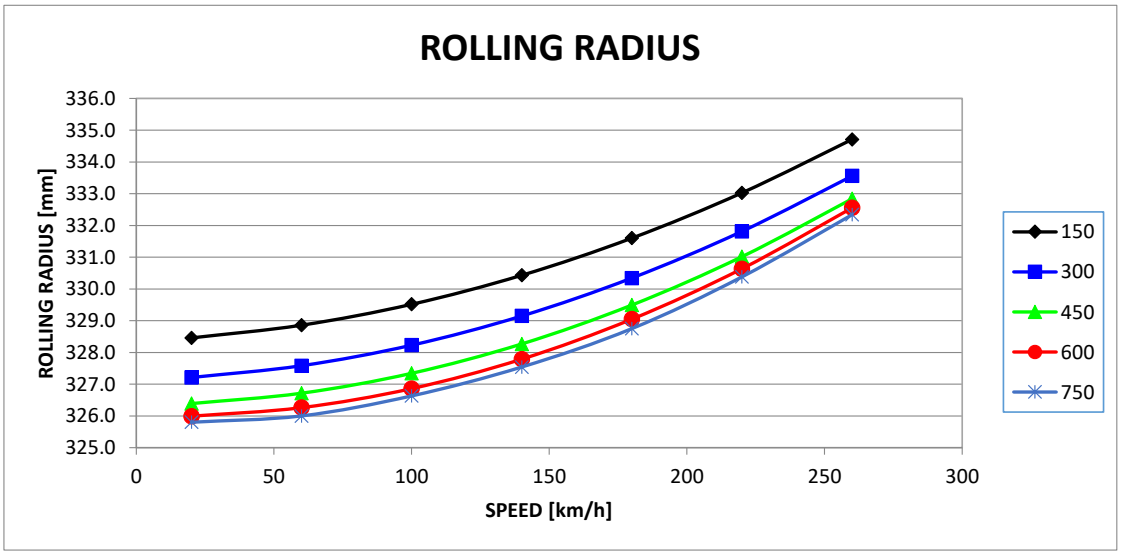

STATIC RADIAL DEFLECTION – 265/660-18x10.0J @ CA 0.0 ° DHHB

Load [kg]	Inflation Pressure [bar]						
	2.6	2.4	2.2	2.0	1.8	1.6	1.4
0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
25	0.9	0.9	0.9	1.0	1.0	1.1	1.2
50	1.7	1.7	1.8	1.9	2.1	2.2	2.4
75	2.5	2.6	2.7	2.9	3.1	3.2	3.5
100	3.3	3.4	3.6	3.8	4.1	4.3	4.7
125	4.1	4.2	4.5	4.7	5.0	5.3	5.8
150	4.9	5.0	5.3	5.6	6.0	6.4	6.9
175	5.7	5.8	6.1	6.5	6.9	7.4	8.0
200	6.4	6.6	6.9	7.3	7.9	8.4	9.1
225	7.1	7.3	7.8	8.2	8.8	9.3	10.2
250	7.9	8.1	8.6	9.0	9.7	10.3	11.2
275	8.6	8.8	9.3	9.9	10.6	11.3	12.3
300	9.3	9.6	10.1	10.7	11.4	12.2	13.3
325	10.0	10.3	10.9	11.5	12.3	13.2	14.3
350	10.7	11.0	11.6	12.3	13.2	14.1	15.3
375	11.4	11.7	12.4	13.1	14.0	15.0	16.3
400	12.0	12.4	13.1	13.9	14.9	15.9	17.3
425	12.7	13.1	13.8	14.7	15.7	16.8	18.3
450	13.3	13.8	14.6	15.4	16.5	17.7	19.3
475	14.0	14.4	15.3	16.2	17.3	18.6	20.2
500	14.6	15.1	16.0	16.9	18.1	19.4	21.2
525	15.3	15.8	16.7	17.7	18.9	20.3	22.1
550	15.9	16.4	17.3	18.4	19.7	21.1	23.1
575	16.5	17.1	18.0	19.1	20.5	22.0	24.0
600	17.1	17.7	18.7	19.9	21.3	22.8	24.9
625	17.7	18.3	19.4	20.6	22.0	23.6	25.8
650	18.3	19.0	20.0	21.3	22.8	24.5	26.7
675	18.9	19.6	20.7	22.0	23.5	25.3	27.6
700	19.5	20.2	21.3	22.7	24.3	26.1	28.5
725	20.1	20.8	22.0	23.4	25.0	26.9	29.3
750	20.6	21.4	22.6	24.1	25.8	27.7	30.2
775							
800							

STATIC RADIAL DEFLECTION – 265/660-18x10.0J @ CA 0.0° DHHB

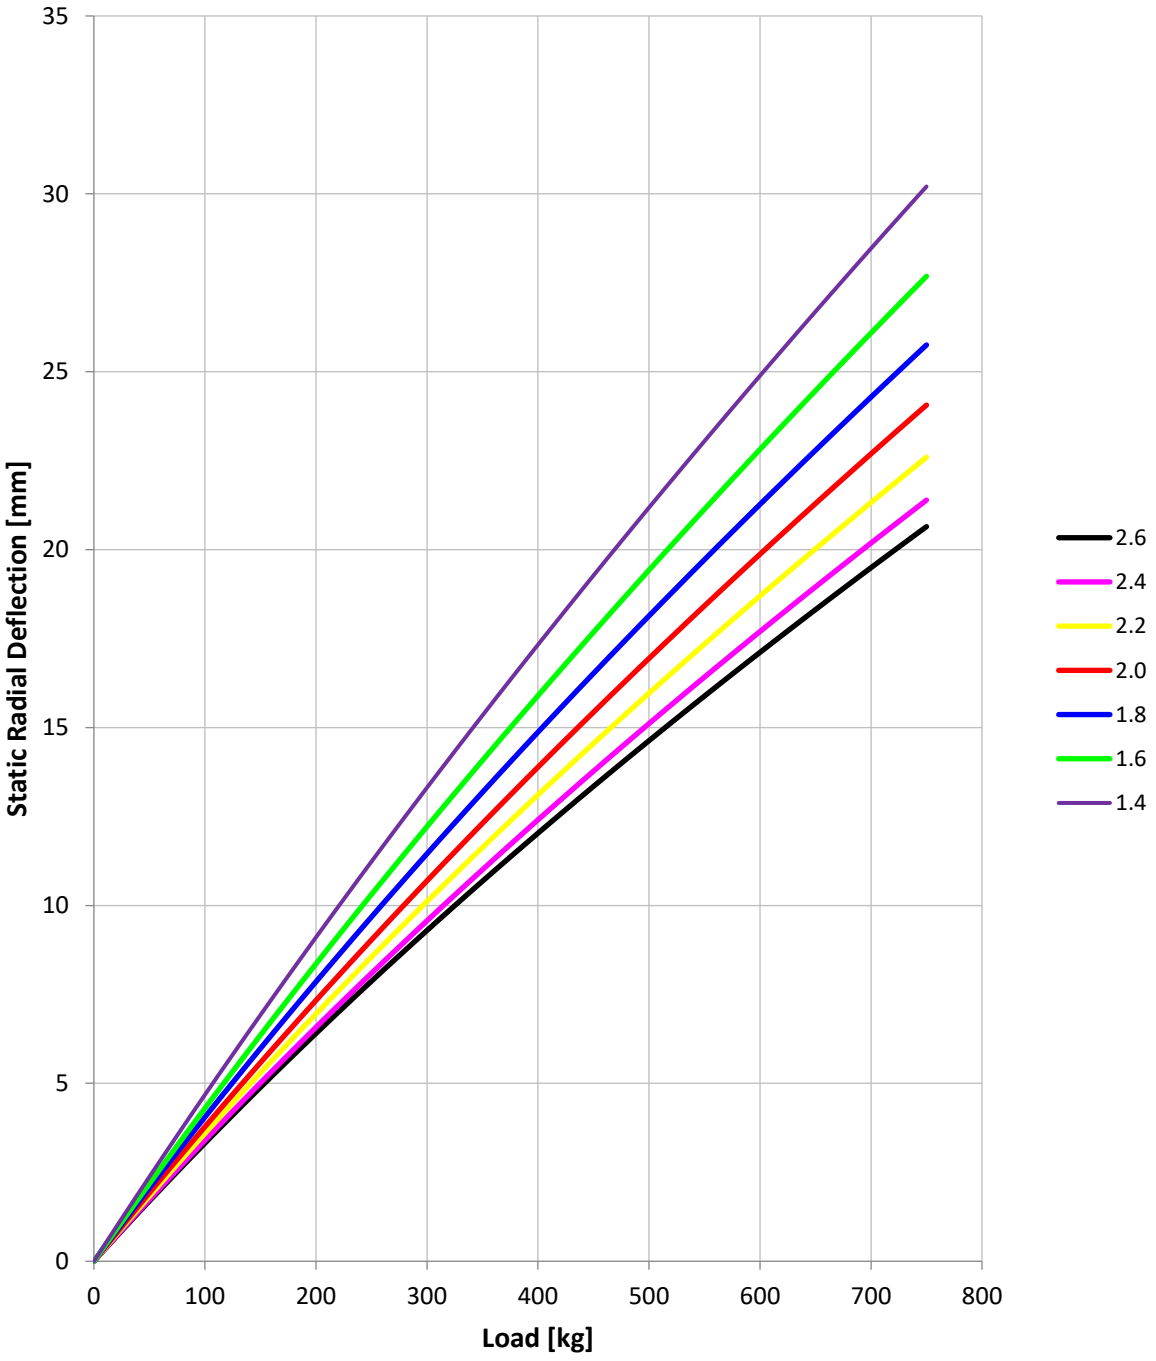

STATIC RADIAL DEFLECTION – 265/660-18x10.0J @ CA -3.0 ° DHHB

Load [kg]	Inflation Pressure [bar]						
	2.6	2.4	2.2	2.0	1.8	1.6	1.4
0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
25	1.0	1.0	1.1	1.1	1.2	1.2	1.4
50	1.9	2.0	2.1	2.2	2.3	2.5	2.7
75	2.8	3.0	3.1	3.2	3.4	3.7	4.0
100	3.7	3.9	4.1	4.3	4.5	4.8	5.3
125	4.5	4.8	5.0	5.3	5.6	6.0	6.5
150	5.4	5.7	6.0	6.3	6.6	7.1	7.8
175	6.2	6.5	6.9	7.2	7.7	8.2	9.0
200	7.0	7.4	7.8	8.2	8.7	9.2	10.1
225	7.8	8.2	8.6	9.1	9.6	10.3	11.3
250	8.6	9.0	9.5	10.0	10.6	11.3	12.4
275	9.4	9.8	10.3	10.9	11.6	12.4	13.5
300	10.1	10.6	11.1	11.8	12.5	13.4	14.6
325	10.9	11.4	12.0	12.6	13.4	14.4	15.7
350	11.6	12.1	12.8	13.5	14.3	15.3	16.7
375	12.3	12.9	13.5	14.3	15.2	16.3	17.8
400	13.0	13.6	14.3	15.1	16.1	17.2	18.8
425	13.7	14.3	15.1	15.9	17.0	18.2	19.8
450	14.4	15.0	15.8	16.7	17.8	19.1	20.8
475	15.1	15.7	16.6	17.5	18.7	20.0	21.8
500	15.8	16.4	17.3	18.3	19.5	20.9	22.8
525	16.4	17.1	18.0	19.0	20.3	21.8	23.7
550	17.1	17.8	18.7	19.8	21.1	22.6	24.7
575	17.7	18.4	19.4	20.5	21.9	23.5	25.6
600	18.4	19.1	20.1	21.3	22.7	24.4	26.5
625	19.0	19.7	20.8	22.0	23.5	25.2	27.4
650	19.6	20.4	21.4	22.7	24.3	26.0	28.3
675	20.2	21.0	22.1	23.4	25.1	26.9	29.2
700	20.9	21.6	22.8	24.1	25.8	27.7	30.1
725	21.5	22.2	23.4	24.8	26.6	28.5	31.0
750	22.1	22.8	24.1	25.5	27.3	29.3	31.9
775							
800							
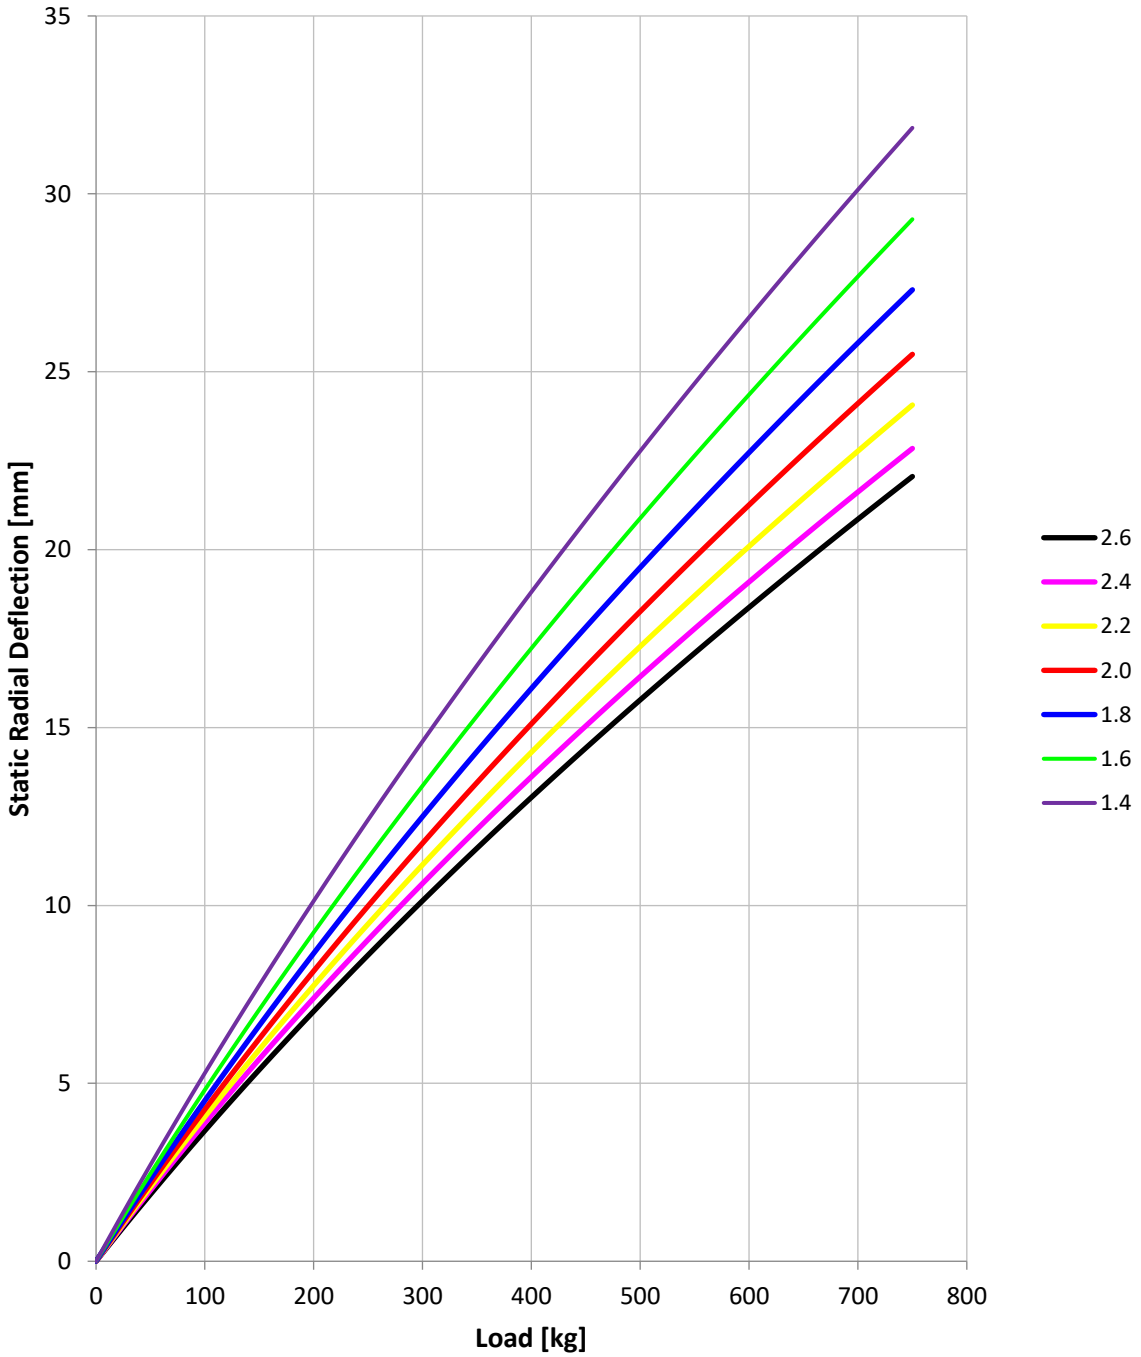
STATIC RADIAL DEFLECTION – 265/660-18x10.0J @ CA -3.0° DHHB