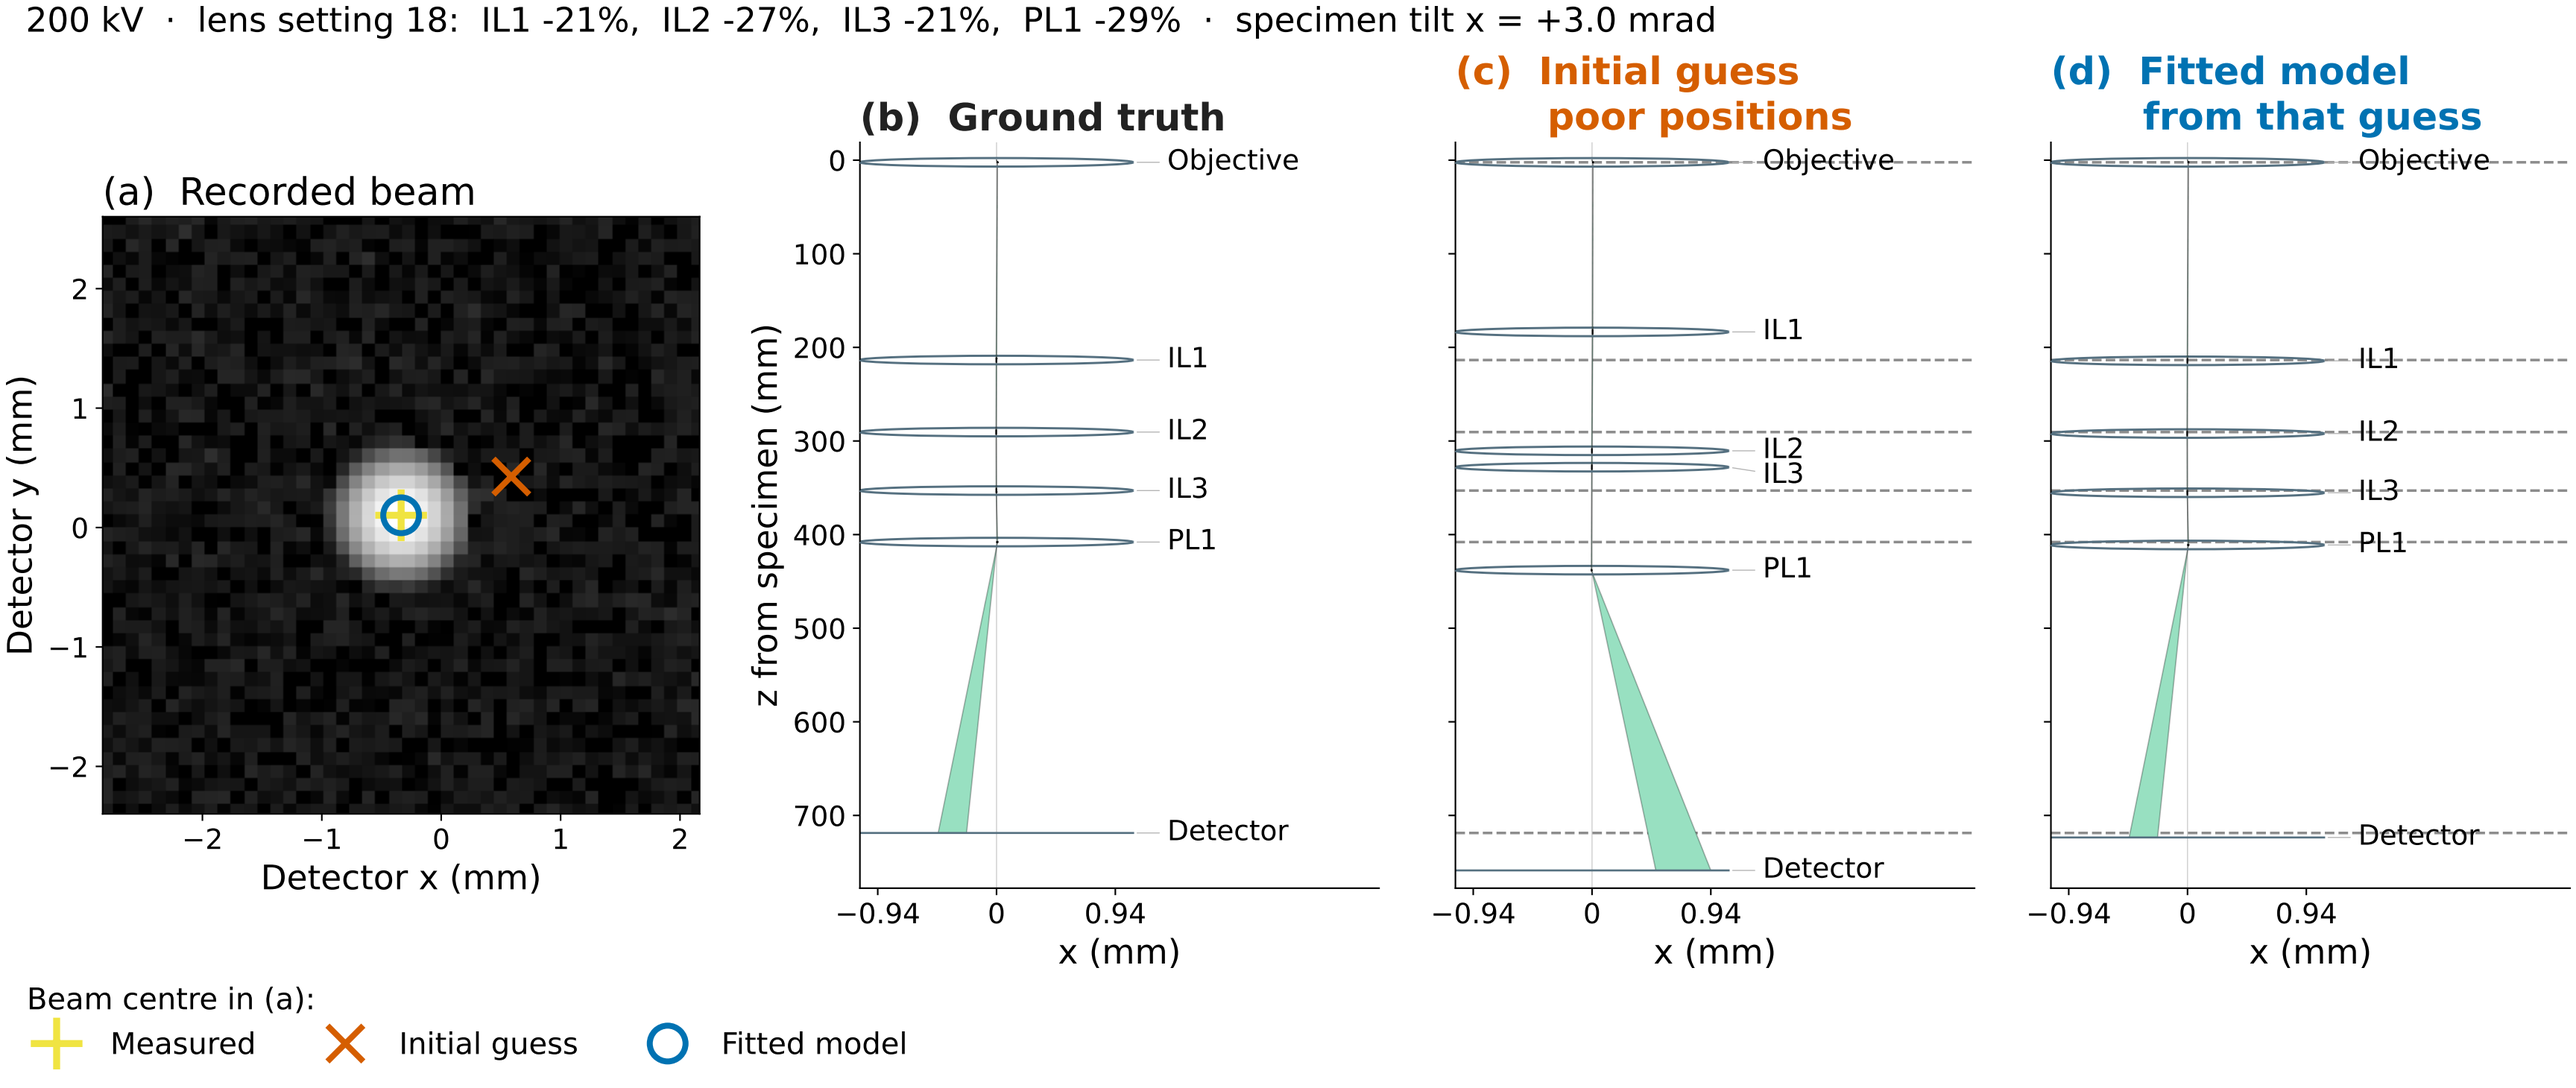

200 kV · lens setting 18: IL1 -21%, IL2 -27%, IL3 -21%, PL1 -29% · specimen tilt x = +3.0 mrad
(a) Recorded beam
Detector y (mm)
Detector x (mm)
(b) Ground truth
(c) Initial guess
poor positions
(d) Fitted model
from that guess
z from specimen (mm)
x (mm)
Objective
IL1
IL2
IL3
PL1
Detector
Beam centre in (a):
Measured
Initial guess
Fitted model