

Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help

Logical
Physical
940,976

Time: 00:11:33

Automatically Choose Connection Type

Scenario 0
New
Delete
Toggle PC/L List Window

Switch0
Physical
Config
CLI
Attributes

IOS Command Line Interface

```

VLINE-S-CHANGED: Interface FastEthernet0/1, changed state to up
VLINEPROTO-S-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state to up
VLINE-S-CHANGED: Interface FastEthernet0/2, changed state to up
VLINEPROTO-S-UPDOWN: Line protocol on Interface FastEthernet0/2, changed state to up
VLINE-S-CHANGED: Interface FastEthernet0/3, changed state to up
VLINEPROTO-S-UPDOWN: Line protocol on Interface FastEthernet0/3, changed state to up
VLINE-S-CHANGED: Interface FastEthernet0/4, changed state to up
VLINEPROTO-S-UPDOWN: Line protocol on Interface FastEthernet0/4, changed state to up
VLINE-S-CHANGED: Interface FastEthernet0/5, changed state to up
VLINEPROTO-S-UPDOWN: Line protocol on Interface FastEthernet0/5, changed state to up
VLINE-S-CHANGED: Interface FastEthernet0/6, changed state to up
VLINEPROTO-S-UPDOWN: Line protocol on Interface FastEthernet0/6, changed state to up

Switch>ed
Translating "ed"...domain server (255.255.255.255)
% Unknown command or computer name, or unable to find computer address

Switch>en
Switch>conf t
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#vlan 2
Switch(config-vlan)#name programmer
Switch(config-vlan)#int range fa0/1-3
Switch(config-if-range)#switchport mode access
Switch(config-if-range)#switchport access vlan 2
Switch(config-if-range)#exit
Switch(config)#show
^
% Invalid input detected at '' marker.

Switch(config)#show vlan
^
% Invalid input detected at '' marker.


Switch(config)#show ip
^
% Invalid input detected at '' marker.

Switch(config)#

```

Copy
Paste

[illegible]

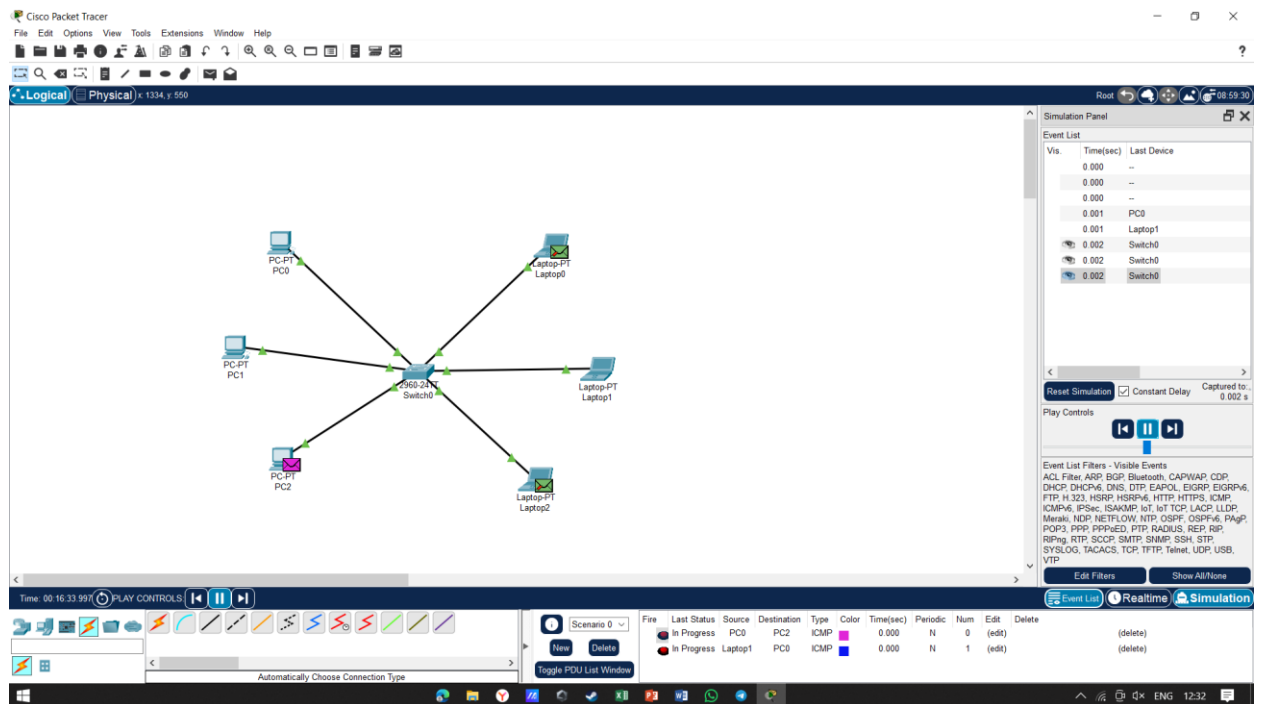

4.Создали сеть директоров.

