




1.

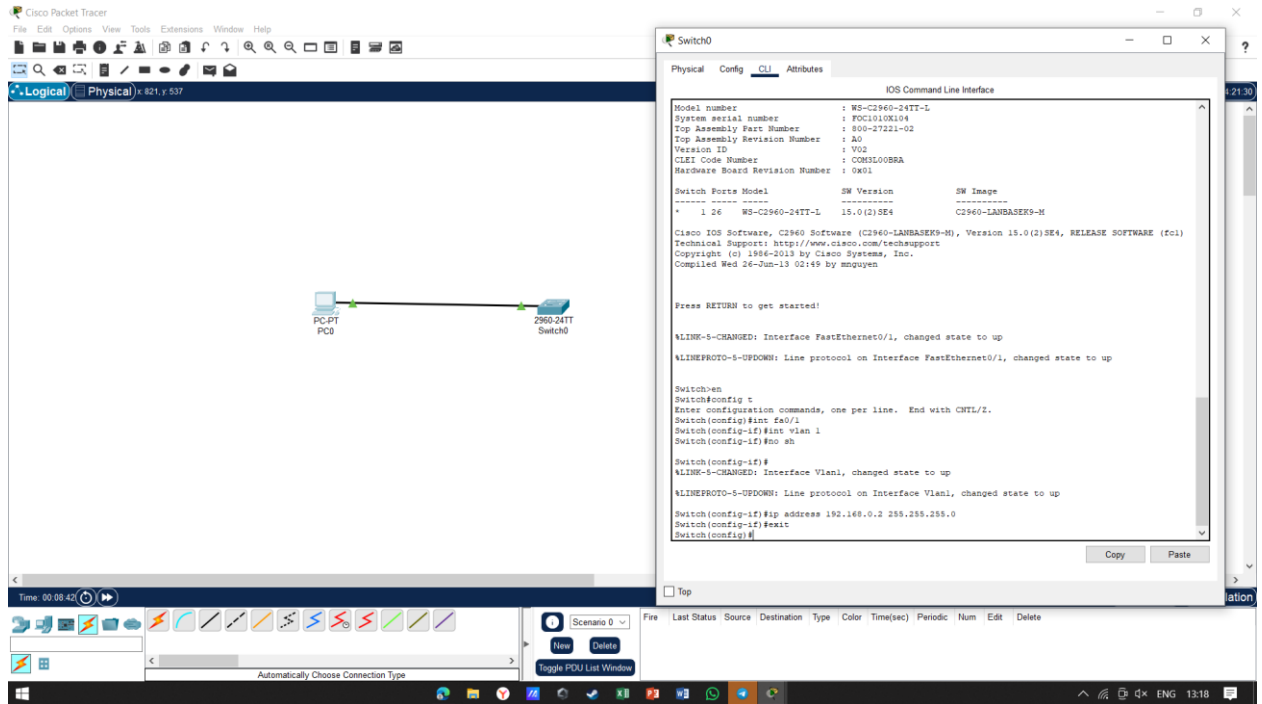


2.

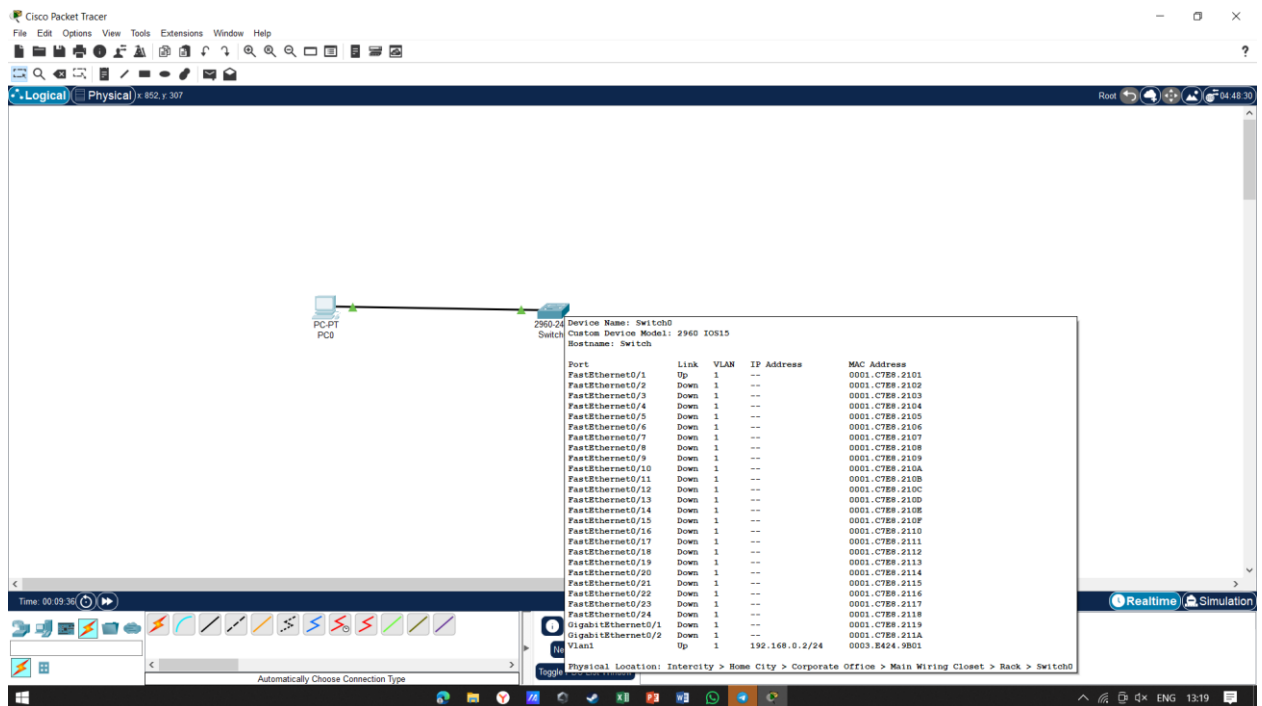

3.

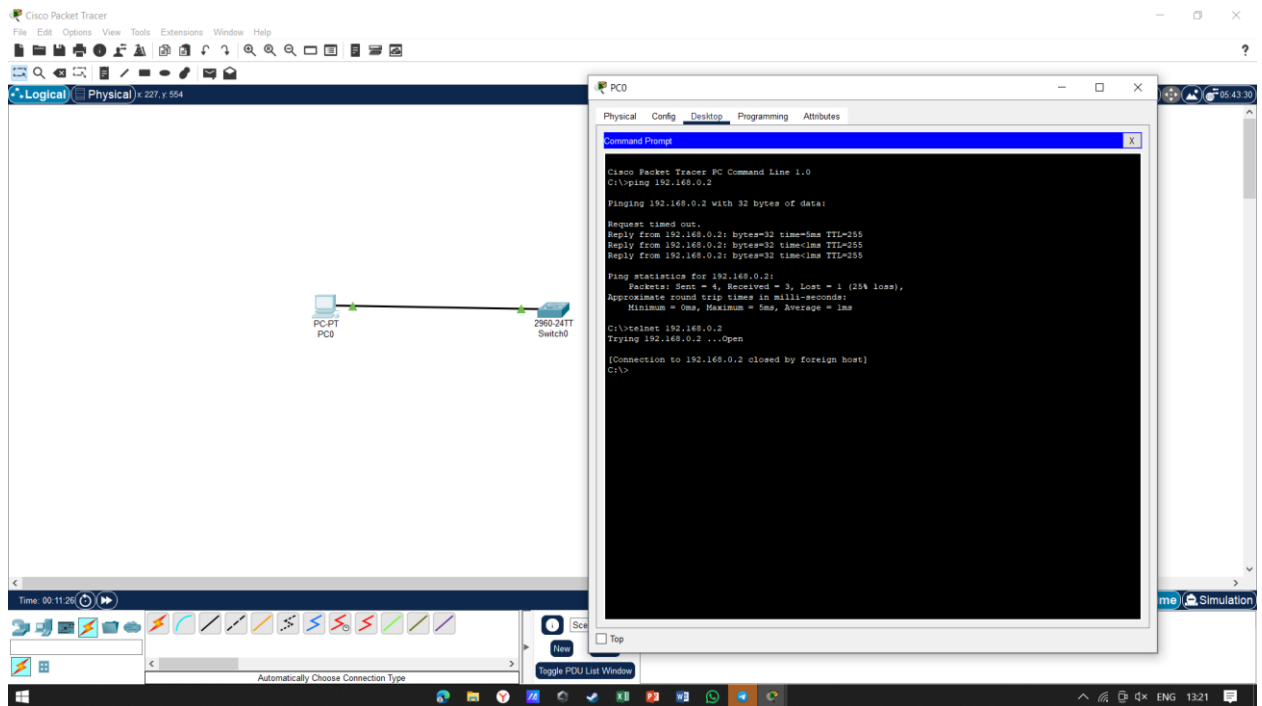

4.

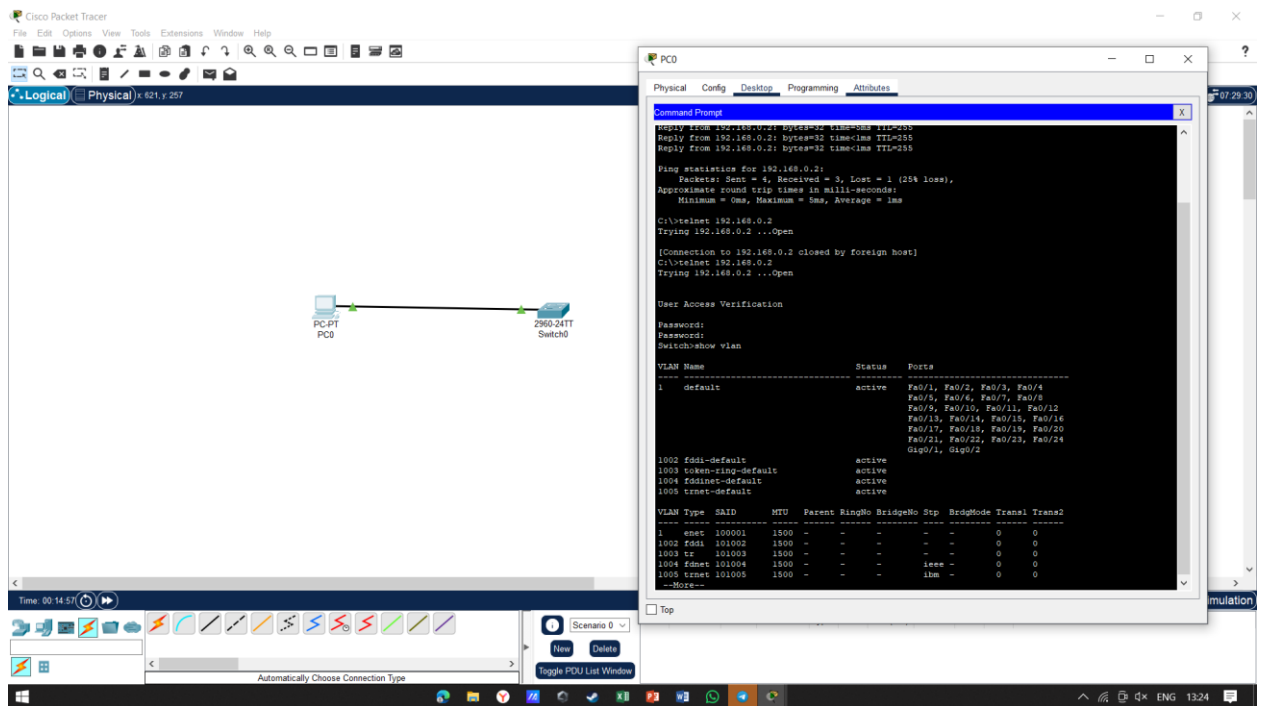

5.

Cisco Packet Tracer

File Edit Options View Tools Extensions Window Help

Logical Physical 481.7.346

PC-PT PC0

PC0

Physical Config Desktop Programming Attributes

Command Prompt

Trying 192.168.0.2 ...Open

User Access Verification

Password:

Switch#show vlan

VLAN Name	Status	Ports
1 default	active	Fa0/1, Fa0/2, Fa0/3, Fa0/4 Fa0/5, Fa0/6, Fa0/7, Fa0/8 Fa0/9, Fa0/10, Fa0/11, Fa0/12 Fa0/13, Fa0/14, Fa0/15, Fa0/16 Fa0/17, Fa0/18, Fa0/19, Fa0/20 Fa0/21, Fa0/22, Fa0/23, Fa0/24 Gig0/1, Gig0/2
1002 fddi-default	active	
1003 token-ring-default	active	
1004 fddinet-default	active	
1005 trinet-default	active	

VLAN Type	SAID	MTU	Parent	RingNo	BridgeNo	Stp	BridgeMode	Trans1	Trans2
1	enet	100001	1500	-	-	-	-	0	0
1002	fddi	101002	1500	-	-	-	-	0	0
1003	tr	101003	1500	-	-	-	-	0	0
1004	fddinet	101004	1500	-	-	-	ieee	0	0
1005	trinet	101005	1500	-	-	-	llm	0	0

VLAN Type	SAID	MTU	Parent	RingNo	BridgeNo	Stp	BridgeMode	Trans1	Trans2
Remote VLAN VLANs									
Primary	Secondary	Type	Ports						

Switch#

Switch#en

Password:

Switch#conf t

Enter configuration commands, one per line. End with CNTL/Z.

Switch(config)#

Time: 00:17:42

Scenario 0

New Delete

Toggle PCU List Window

Realtime Simulation

ENG 13:27