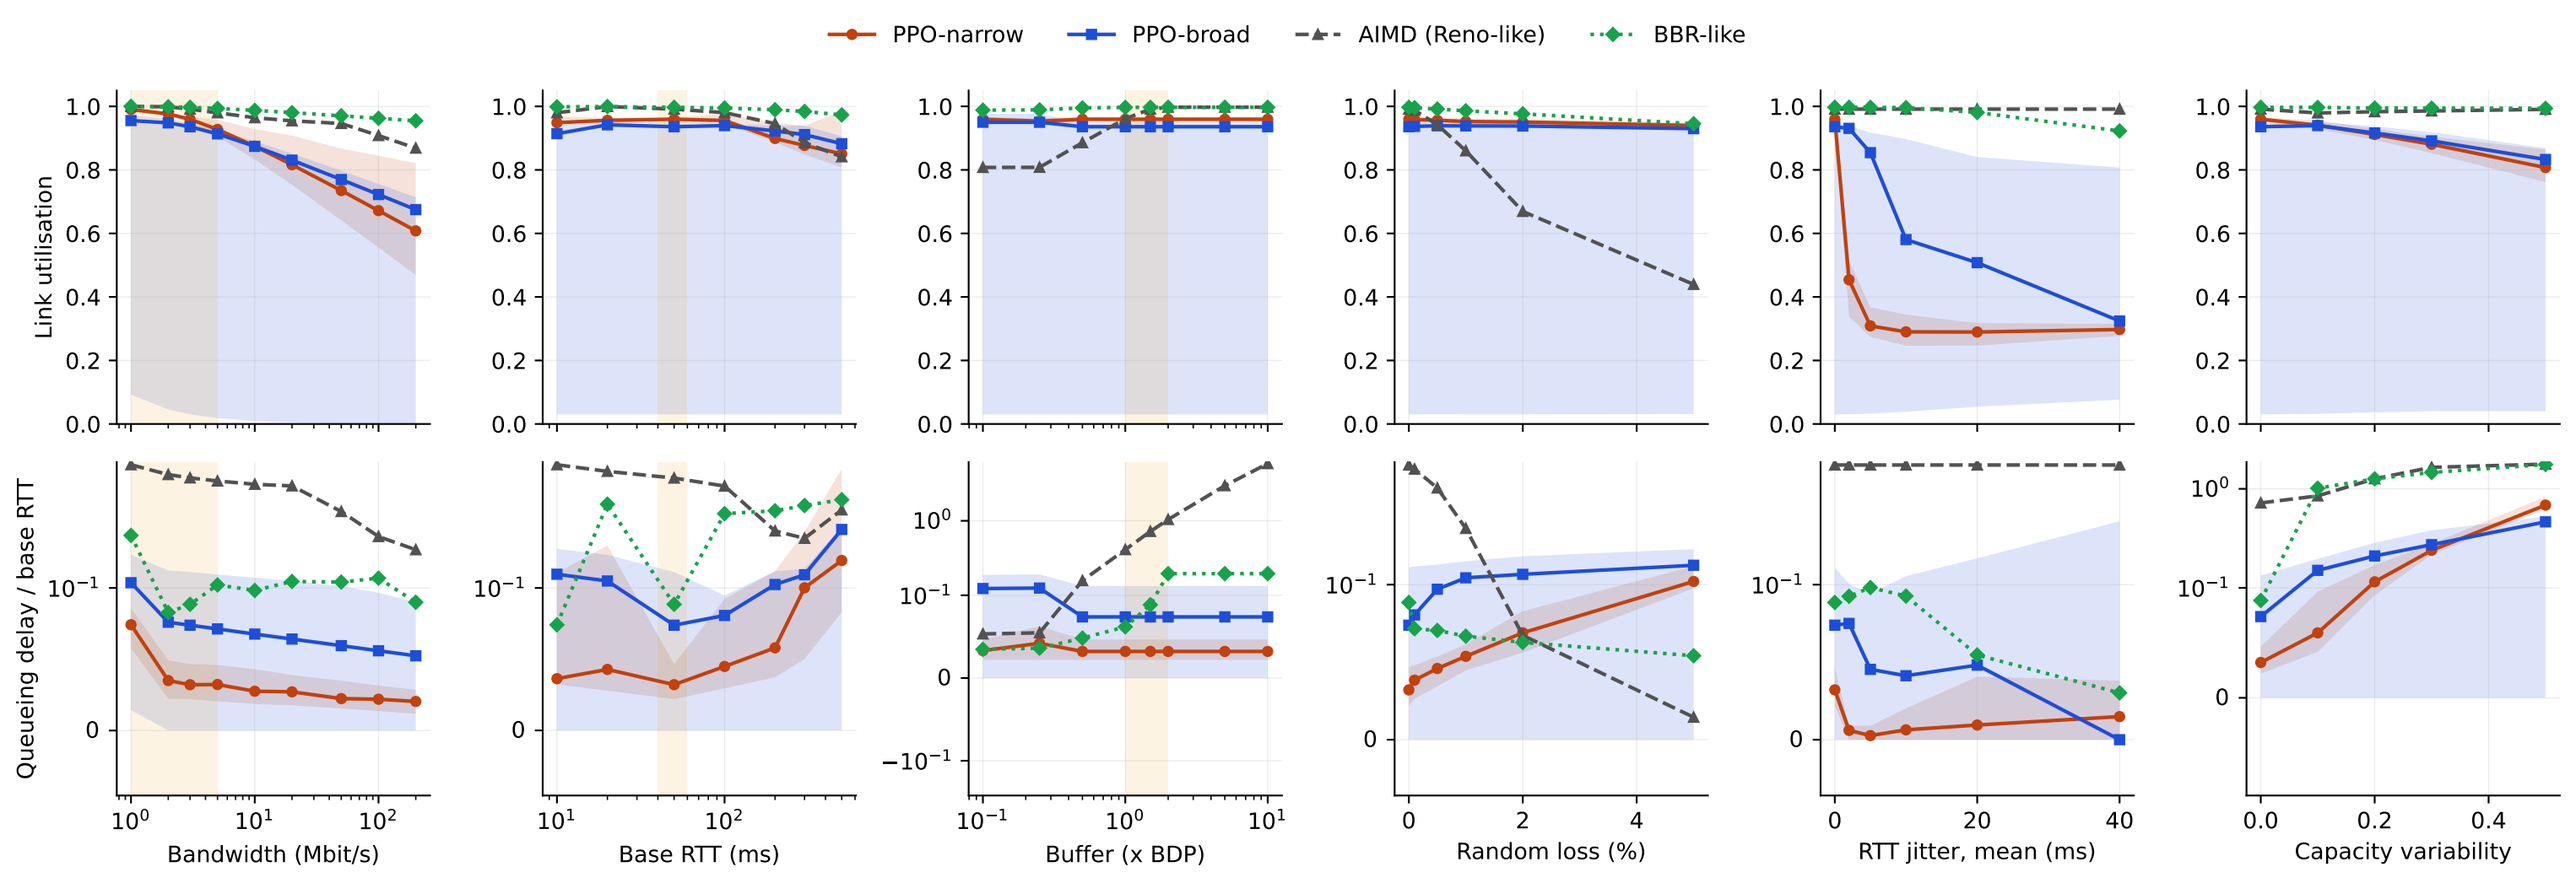
PPO-narrow
PPO-broad
AIMD (Reno-like)
BBR-like
Link utilisation
Queueing delay / base RTT
Bandwidth (Mbit/s)
Base RTT (ms)
Buffer (x BDP)
Random loss (%)
RTT jitter, mean (ms)
Capacity variability