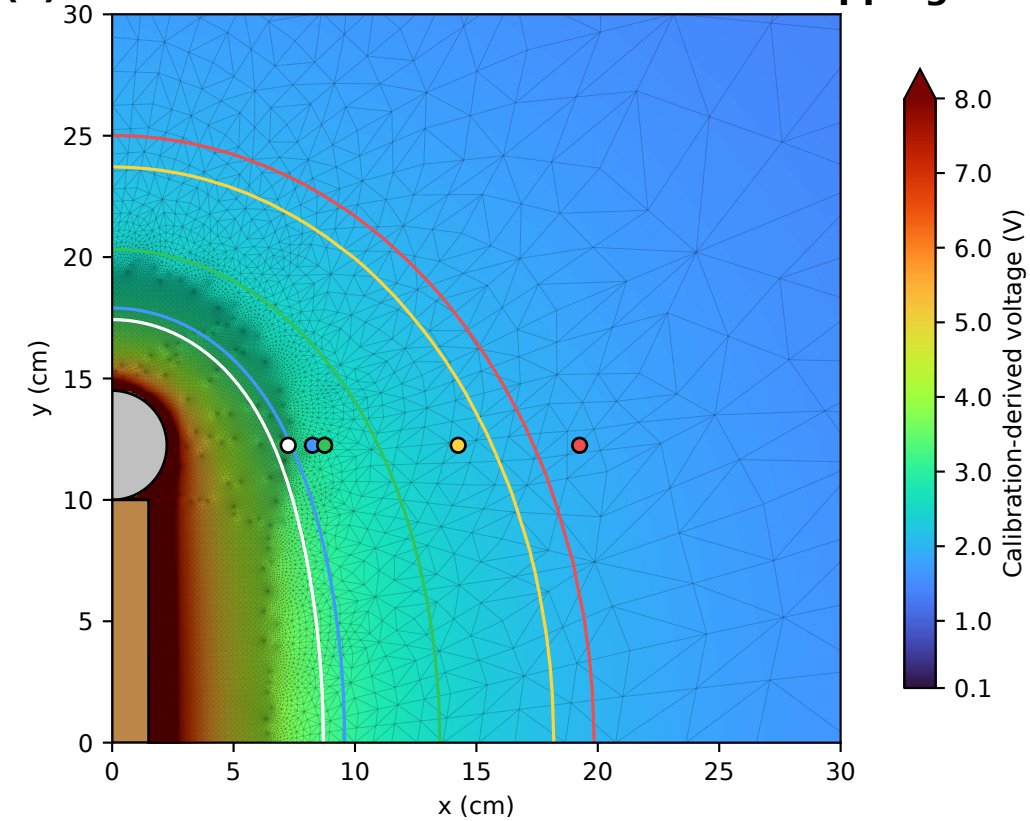
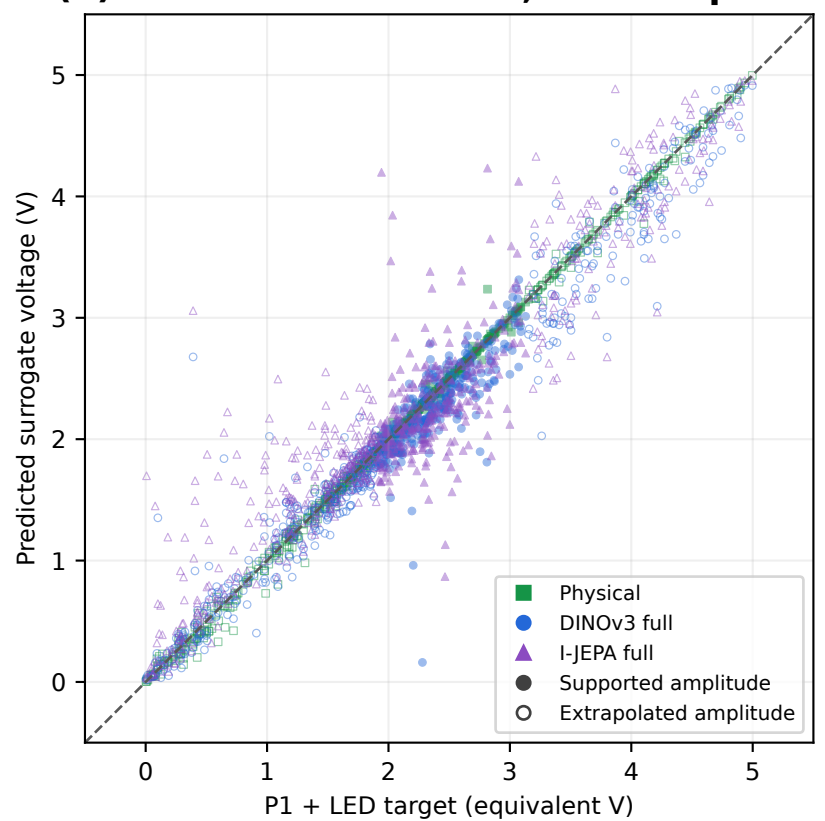

(a) FEM contours with five-LED fitted remapping
x (cm)
y (cm)
Calibration-derived voltage (V)
0.1
1.0
2.0
3.0
4.0
5.0
6.0
7.0
8.0


(b) Real test: 92 frames, 736 air queries
P1 + LED target (equivalent V)
Predicted surrogate voltage (V)
Physical
DINOv3 full
I-JEPA full
Supported amplitude
Extrapolated amplitude