



Power


USB-C that (should) work with A-C and C-C cables. Not USB-PD, just 5v1.5a

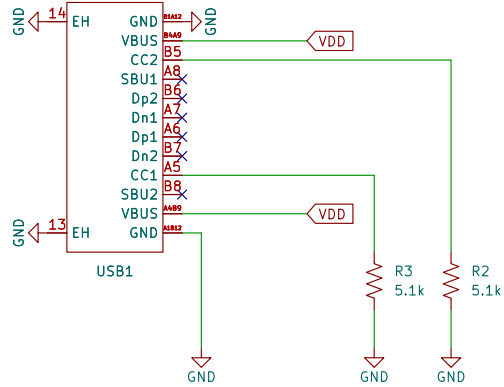

Alternative to USB port

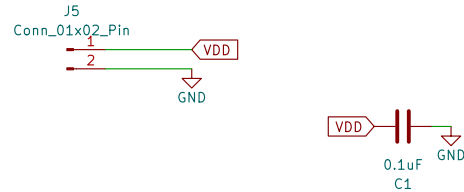

I2C Bus Extender

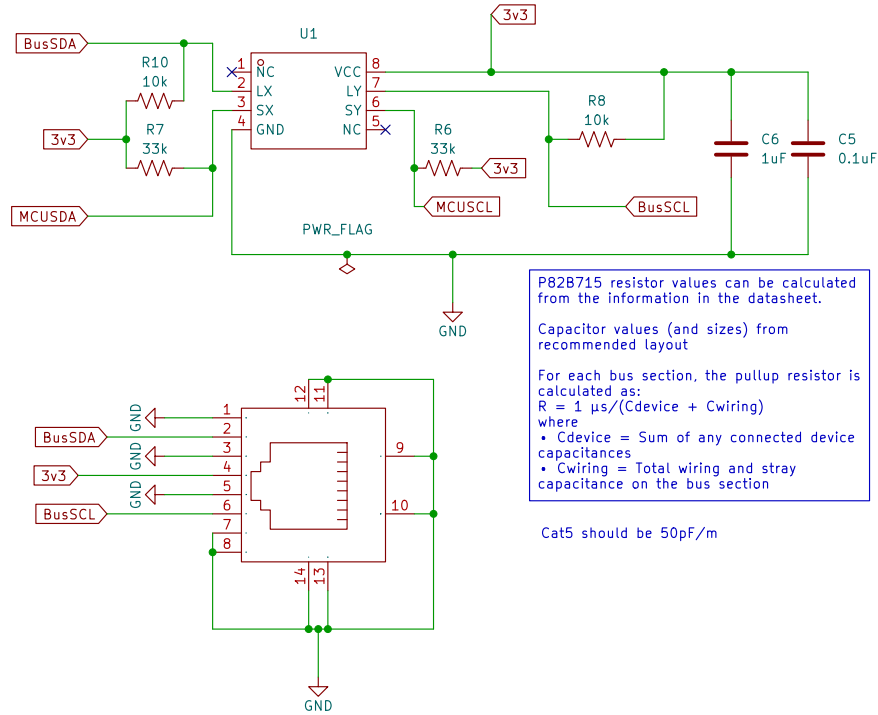



P82B715 resistor values can be calculated from the information in the datasheet.

Capacitor values (and sizes) from recommended layout

For each bus section, the pullup resistor is calculated as:
 $R = 1 \mu s / (C_{device} + C_{wiring})$
 where
 • C_{device} = Sum of any connected device capacitances
 • C_{wiring} = Total wiring and stray capacitance on the bus section

Cat5 should be 50pF/m

U2
ESP32-S3-SUPERMINI
Circuits_MCU:ESP32_S3_Supermini PWR_FLAG

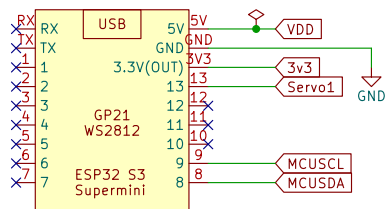

tmuWolverine

Sheet: /
File: HonkLock.kicad_sch

Title: HonkLock

Size: A4 Date: 2026-08-26
KiCad E.D.A. 10.0.6

Rev: 1
Id: 1/1