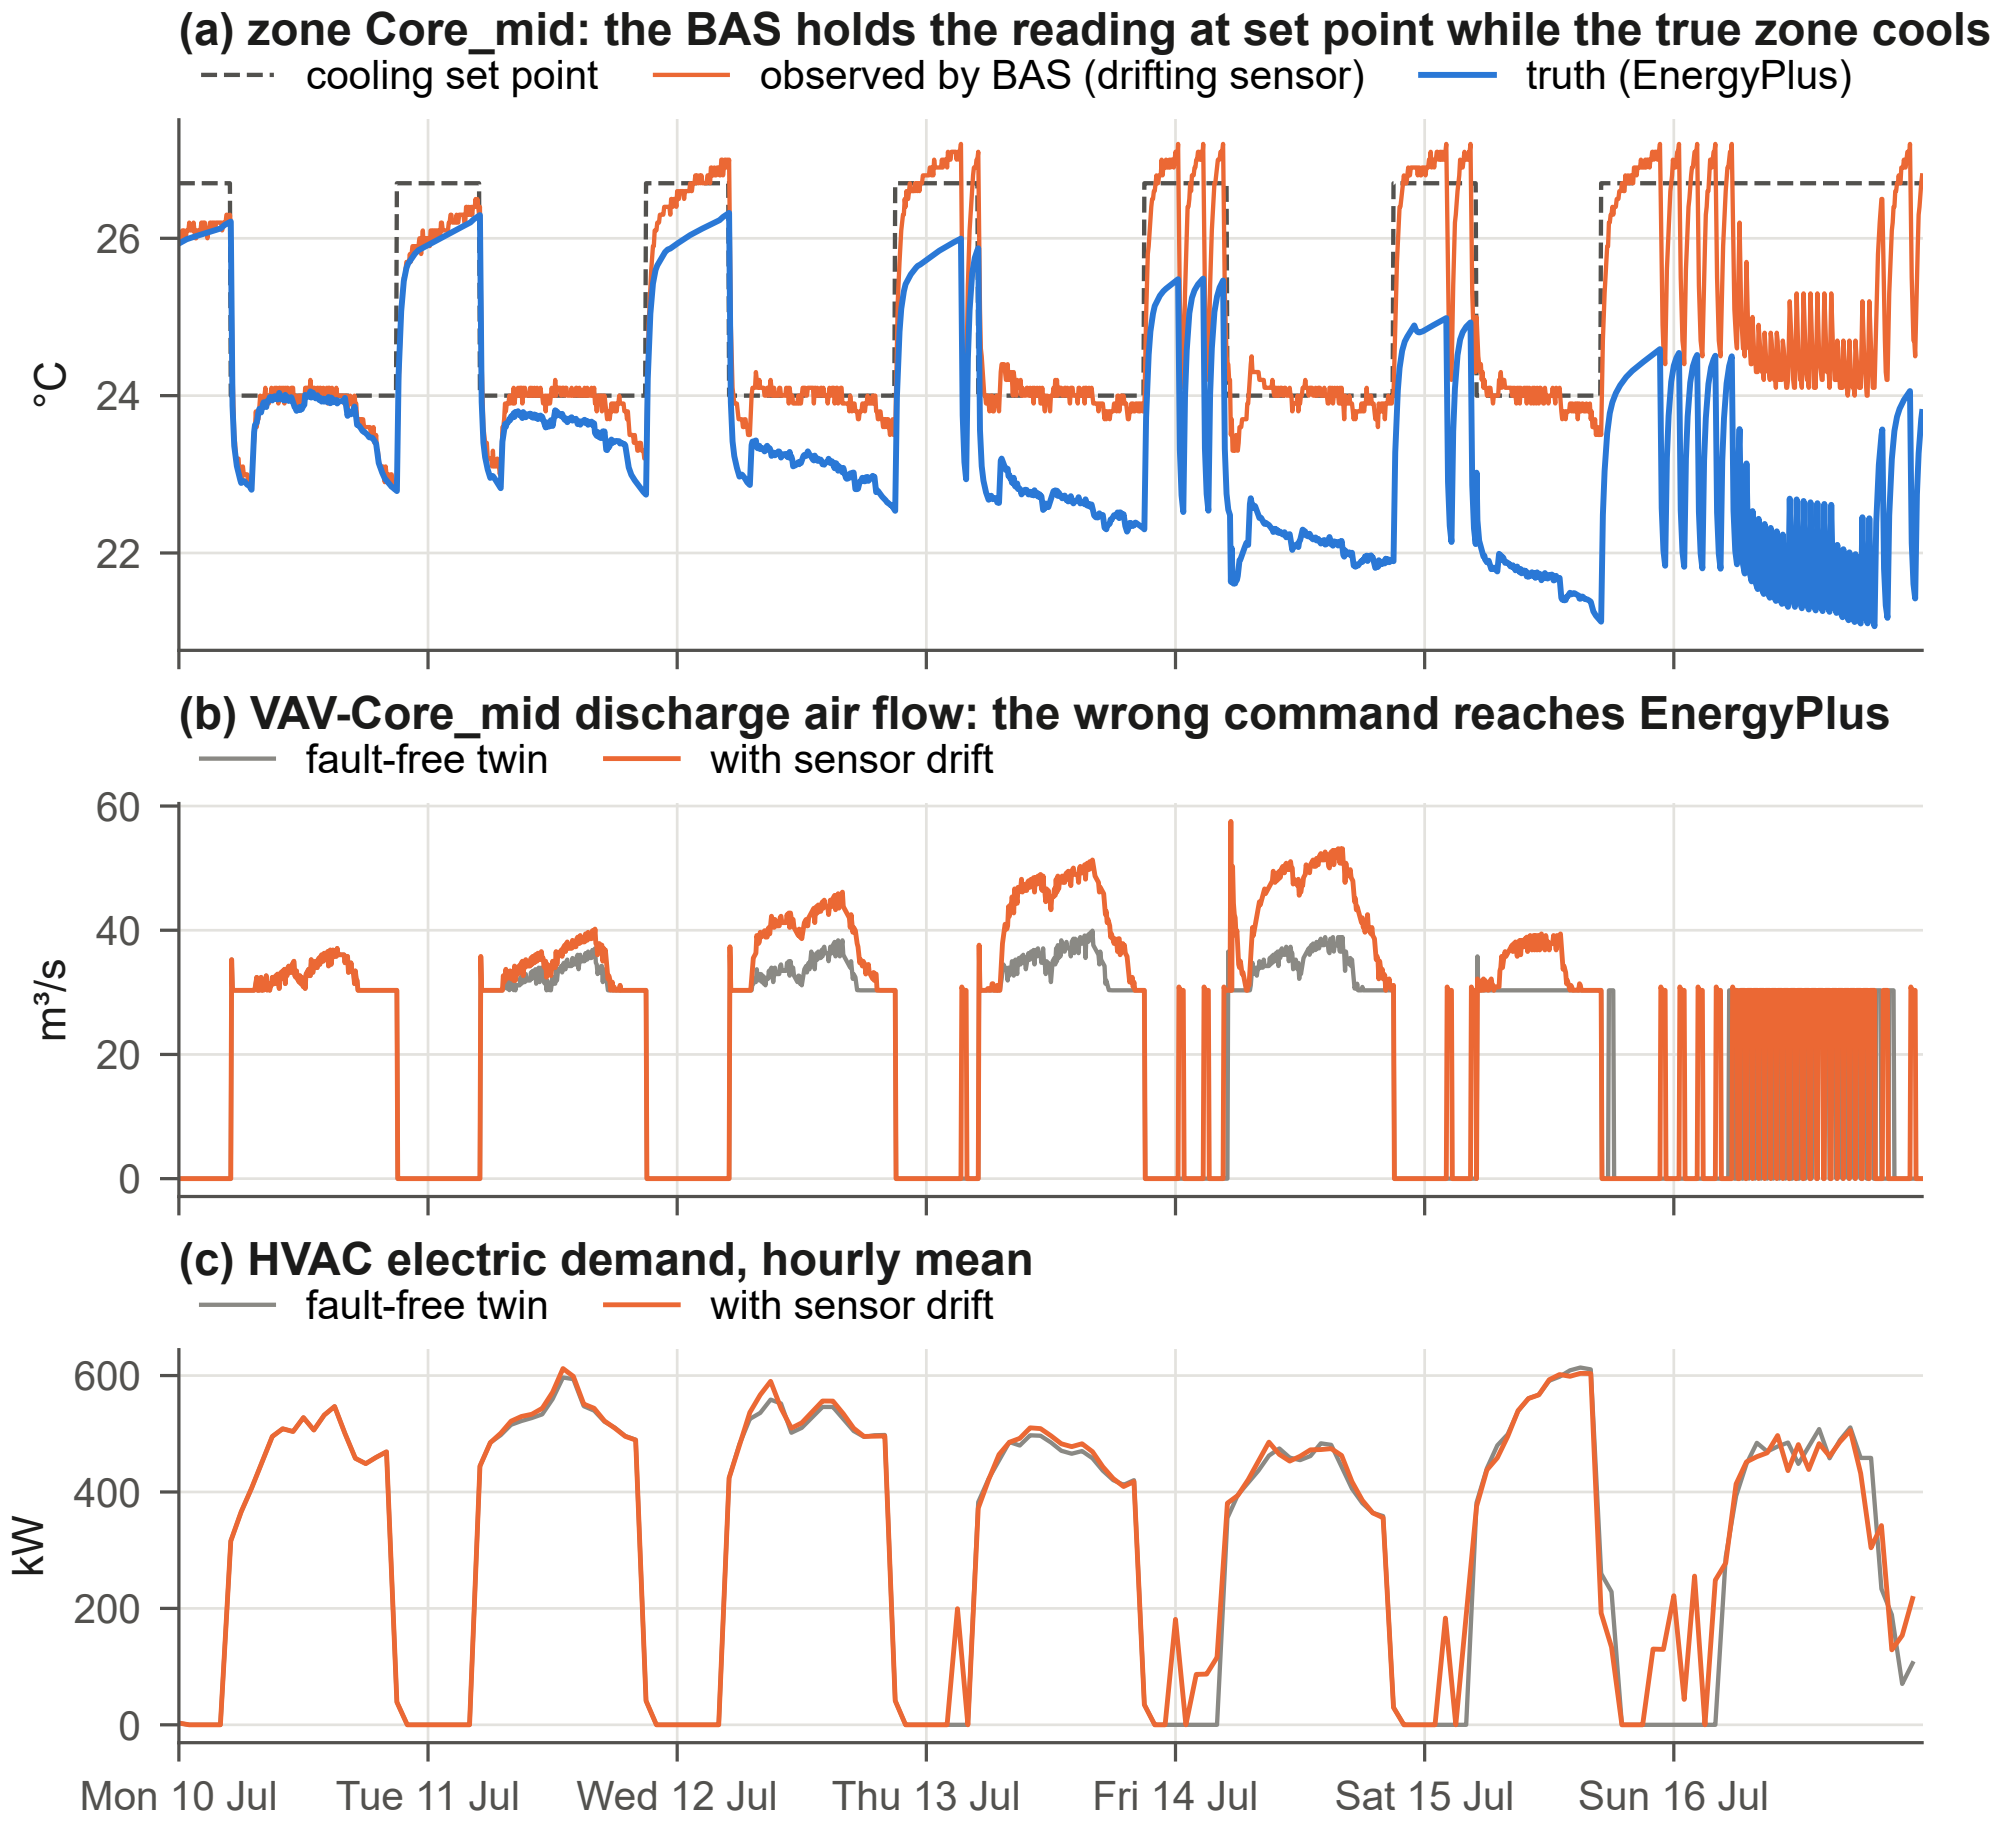

(a) zone Core_mid: the BAS holds the reading at set point while the true zone cools
cooling set point
observed by BAS (drifting sensor)
truth (EnergyPlus)
°C
26
24
22
(b) VAV-Core_mid discharge air flow: the wrong command reaches EnergyPlus
fault-free twin
with sensor drift
m³/s
60
40
20
0
(c) HVAC electric demand, hourly mean
fault-free twin
with sensor drift
kW
600
400
200
0
Mon 10 Jul
Tue 11 Jul
Wed 12 Jul
Thu 13 Jul
Fri 14 Jul
Sat 15 Jul
Sun 16 Jul