


Grandstream Networks, Inc.

IPPBX HTTPS API



The UCM6xxx provides a new API interface to query, edit PBX settings and implement multiple call functions on another server connected to it via API. UCM will actively send system reports and call reports to this other server. Additionally, legacy CDR API, REC API and PMS API in addition to QUEUE API are included and supported by default when enabling API.

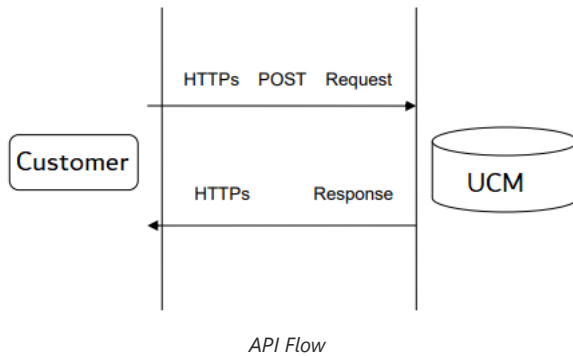

The UCM6xxx series includes the UCM620x, UCM630x, and UCM630xA series as well as the UCM6510.

The UCM6xxx series include the UCM620x, UCM630x and UCM630xA series as well as the UCM6510.

API Basics

To get started with UCM's API feature, users must configure the HTTPS API settings and get familiar with the feature's communication method, request structure, response messages, and event reports. WebSocket is supported to ensure a bi-directional communication between the IPPBX and the client for immediate notifications and reports.

Configuring the API

Enabling PBX API Interface

1. Log into the UCM web UI and navigate to **Integrations > API Configuration > HTTPS API Settings (New)**.
2. Check the Enable option and configure a username and password. These credentials will be used when connecting to the API.

API Configuration

API Settings (New) | HTTPS API Settings (Old) | CDR Real-time Output Settings | Upload Prompts User Configuration

The UCM provides a second API interface to query, edit PBX settings and implement multiple call functions on another server connected to it via API. PBX will actively send system reports and call reports to this other server. Additionally, legacy CDR API, REC API and PMS API are supported. Please see the user manual for more details.

Enable API: ☒ Save

+ Add

USER	OPTIONS
cdrapi	

1 / 1 Total: 1 10 / page Goto 1

Copyright © Grandstream Networks, Inc. 2022. All Rights Reserved.

HTTPS API Settings

Note

The admin can create multiple users with different credentials to be able to authenticate into the API.

Enable	Enable/Disable API. The default setting is disabled.
Username	Configure the username for API Authentication.
Password	Configure the password for API Authentication.
Call Control	<p>If enabled, 3rd party applications will be able to manage inbound calls via API actions.</p> <p>acceptCall will accept incoming calls while refuseCall will reject them. If no actions are done within 10 seconds, calls will automatically be accepted.</p>

New API Configuration Parameters

Login Restrictions

When several failed login attempts have been made from a specific IP address, that IP address will be added to the UCM's blacklist and will be unable to access the UCM. To ensure this doesn't happen to trusted IP addresses, consider enabling and adding its IP address to the whitelist as shown on the same page as the server configuration.

Communication

Communication Protocol

The API uses HTTPS protocol and the same certificate used for UCM web portal. If the UCM is using HTTP, the API feature cannot be used.

JSON data into HTTP request

Below is a JSON example of **challenge** action and how the JSON script will be encapsulated in HTTPS Post request:

```
curl -H "Content-Type: application/json;charset=UTF-8" -H
"Connection: close" -X POST -d '{"request": {"action": "challenge",
"user": "cdrapi", "version": "1.0"}}' -k
"https://192.168.5.153:8089/api" --insecure
```

As a response to the sent request, the UCM will return a challenge string which will be used to generate the token as mentioned above and with the same structure the **login** action needs to be sent to have the cookie id as response.

Communication Method

The communication between the UCM and 3rd party applications is like the following:

- o 3rd party application server sends request to UCM:
 1. 3rd party application initiates the request.
 2. 3rd party application is the client, and UCM is the server.
 3. Scenario: 3rd party application initiates calls and sends query to UCM.

Version Control

“Challenge” requests must contain the API version number. If version is not specified, requests will be parsed based on the latest version of the API, and this may result in information being processed incorrectly. Thus, it is highly recommended to include version number in the challenge request.

Example: If the latest API version is 1.2, and the 3rd party interface was developed using version 1.0, version 1.0 must be included when sending the challenge request.

```
{"request": {"action": "challenge", "version": "1.0", "user":
"api"}}
```

Operation Log

UCM’s Operation Log feature is able to display API activity history. API actions will be labeled with “(API)” at the end of each entry. Operation Log entries can be filtered and deleted.

Operation Log				
<div> Delete Search Result (s) Delete All Logs Download Search Result (s) Download All Log </div>				
Date	User Name	IP Address	Results	Page Operation
2019-02-25 17:03:03	cdrapi	192.168.129.16	Operation successful	Logout: logout(API)
2019-02-25 17:03:02	cdrapi	192.168.129.16	Operation successful	Extensions: updatesIPAccount(API)
2019-02-25 17:03:02	cdrapi	192.168.129.16	Operation successful	applyChanges(API)
2019-02-25 17:03:01	cdrapi	192.168.129.16	Operation successful	Login: login(API)
2019-02-25 16:43:12	cdrapi	192.168.129.16	Operation successful	Extensions: updatesIPAccount(API)
2019-02-25 16:43:12	cdrapi	192.168.129.16	Operation successful	applyChanges(API)

Figure 4: Operation Log

API Queries

The new API supports the queries listed below which will accomplish certain requests and get DATA about different modules on UCM62xx.

getSystemStatus	addInboundRoute	listPaginggroup
-----------------	-----------------	-----------------

getSystemGeneralStatus	getInboundRoute	addPaginggroup
listAccount	updateInboundRoute	getPaginggroup
getSIPAccount	deleteInboundRoute	updatePaginggroup
updateSIPAccount	playPromptByOrg	deletePaginggroup
listVoIPTrunk	listBridgedChannels	MulticastPaging
addSIPTrunk	listUnBridgedChannels	MulticastPagingHangup
getSIPTrunk	Hangup	listIVR
updateSIPTrunk	Callbarge	addIVR
deleteSIPTrunk	listQueue	getIVR
listOutboundRoute	getQueue	updateIVR
addOutboundRoute	updateQueue	deleteIVR
getOutboundRoute	addQueue	cdrapi
updateOutboundRoute	deleteQueue	recapi
deleteOutboundRoute	loginLogoffQueueAgent	pmsapi
listInboundRoute	pauseUnpauseQueueAgent	queueapi
mute	Unmute	hold
unhold	dialExtension	dialOutbound
callTransfer	transferNumberInbound	transferNumberOutbound
dialIVR	dialIVROutbound	dialQueue
dialRinggroup	dialOutboundTwo	listUser
getUser	updateUser	listExtensionGroup
listPinSets	refuseCall	acceptCall
applyChanges	addAnalogTrunk	getAnalogTrunk
listAnalogTrunk	updateAnalogTrunk	deleteAnalogTrunk
addSLATrunk	updateSLATrunk	deleteDigitalTrunk
addDigitalTrunk	getDogitalTrunk	listDigitalTrunk
updateDigitalTrunk	listDepartment	

New API Supported Queries

Note

There were rare occurrences when the UCM stopped responding to the HTTPS requests. In case that happens, please reboot the UCM.

Establishing Connection and User Authentication

To use HTTPS API users need to connect to the UCM6xxx's IP address with HTTPS/HTTP port which is by default **8089** then authenticate using the configured **Username** and **Password**.

Challenge

The HTTP authentication is based on challenge/response authentication protocol. The client sends a request for a challenge.

```
{
  "request":{
    "action":"challenge",
    "user":"cdrapi",
    "version":"1.0"
  }
}

{
  "response":{
    "challenge":"0000001652831717"
  },
  "status":0
}
```

Key word	Value	Mandatory	Type	Note
Request Parameter				
user		Yes	string	API username
Version		No	string	API protocol version. New versions will be available for future interfaces. Different versions will be compatible with one another. This keyword is not mandatory. By default, the latest version will be used. If the requested version cannot be matched, the latest version is used
Successful response				
status	0	Yes	int	Successful response
challenge	16-digit Random	Yes	string	Random string returned by the API used to

	number			generate secret key for logging in.
Failed response				
status		Yes		Please see the error code list for more details.
remain_number		No	int	When obtaining parameter failed, the number of remaining attempts will be returned. After exceeding the remaining number of attempts, this IP and username will be added to UCM login blacklist. On UCM web page, the banned IP can be removed.
remain_time		No	int	When an IP address or username has been banned, the ban period will be returned.

HTTP Challenge

Login

Upon obtaining the challenge string, the client then creates an MD5 hash consisting of the challenge and the user password. By sending a login command with the username and MD5 hash, the client will be able to log in. User information will be returned upon successful login.

```
{
  "request":{
    "action":"login",
    "token":"0faa24433e3c7a9bcfa8000f735305d5",
    "url":"http://192.168.5.199:8070",
    "user":"cdrapi"
  }
}
```

```
{
  "response":{
    "cookie":"sid1652831717-1574421057"
  },
  "status":0
}
```

Key word	Value	Mandatory	Type	Note
Request Parameter				
user		Yes	string	API username
token		No	string	Verification code MD5(\${challenge}\${password})

url		No	string	The URL used by the 3rd party application to obtain API reports. For example: \${ip}:\${port}/\${path} Note: If this parameter is not included, no API report can be sent. Note: This feature is not supported yet.
Successful response				
status	0	Yes	int	Successful response
Cookie		Yes	string	Cookie is generated after the 3rd party application successfully connects to the UCM. Excluding challenge and login requests, other API requests need to include the cookie returned by API authentication. Cookie times out in 10 minutes.
Failed response				
status		Yes		Please see the error code list for more details.
remain_num		No	int	When obtaining parameter failed, the number of remaining attempts will be returned. After exceeding the remaining number of attempts, this IP and username will be added to UCM login blacklist. On UCM web page, the banned IP can be removed.
remain_time		No	int	When an IP address or username has been banned, the ban period will be returned.

HTTPS API Login

Logout

The user can send a logout request to log out of the API session.

Request

```
{
  "request":{
    "action":"logout",
    "cookie":"sid930353464-1670323942"
  }
}
```

Response


```
{
  "response": {},
  "status": 0
}
```

Key word	Value	Mandato ry	Type	Note
Request Parameter				
cookie		No	string	Verification code MD5(\$ {challenge} \$ {password})
Successful response				
status	0	Yes	int	Successful response
Failed response				
status		Yes		Please see the error code list for more details.

Data Definition

Request Data

Action: Define the action needed to be executed on the UCM.

Cookie: Session identifier.

Parameters: Parameters of the defined action.

```
{
  "request": {
    "action": "",
    "cookie": "",
    "options": "" #This field is optional to
  include parameters
  }
}
```

Parameters will be added depending on the used action

Response Data

Status: Please refer to the return code table. [Error Return Codes]

Operation Methods

Get System Configuration

getSystemStatus

The “getSystemStatus” action will return the system information.

Request

```
{
  "request":{
    "action":"getSystemStatus",
    "cookie":"sid877877-1574437822"
  }
}
```

Response

```
{
  "response":{
    "idle-time":"14:32:44",
    "part-number":"9660002815A",
    "serial-number":"21AWMJPH70BCA783",
    "system-time":"2019-11-22 17:50:26 UTC+02:00",
    "up-time":"07:33:15"
  },
  "status":0
}
```

Key Word	Value	Mandatory	Type	Note
Request Parameter				
cookie		Yes	string	Returned value after login. All requests must include this value. If no cookie is included, error code -6 will be returned.
Successful response				
status	0	Yes	int	Return successful, status is 0
part-number		No	string	Product part number
up-time		No	string	System uptime since bootup
idle-time		No	string	System idle time
system-time		No	string	System time
Failed response				
status		yes	int	Please see the error code list for more details.

getSystemStatus

getSystemGeneralStatus

The "getSystemGeneralStatus" action will return the version information.

Request

```
{
  "request":{
    "action":"getSystemGeneralStatus",
    "cookie":"sid877877-1574437822"
  }
}
```

Response

```
{
  "response":{
    "base-version":"1.0.20.13",
    "boot-version":"1.0.20.8",
    "core-version":"1.0.20.8",
    "gswave-version":"1.0.20.13",
    "lang-version":"1.0.20.13",
    "product-model":"UCM6202 V1.5A",
    "prog-version":"1.0.20.13",
    "rcvr-version":"1.0.20.8"
  },
  "status":0
}
```

Key Word	Value	Mandato ry	Type	Note
Request Parameter				
cookie		yes	string	Returned value after login. All requests must include this value. If no cookie is included, error code -6 will be returned.
Successful response				
status	0	yes	int	Successful response, status is 0
product- model		no	string	Product model
base- version		no	string	Base version
prog- version		no	string	Program version
boot- version		no	string	Boot version
core- version		no	string	Core version
rcvr- version		no	string	Recovery version
lang- version		no	string	Lang version

gswave-version		no	string	GSWave version
Failed response				
status		yes	int	Please see the error code list for more details.

getSystemGeneralStatus

Extension

Add SIPAccountAndUser

Creates a new SIP extension. The addSIPAccountAndUser's supported parameters and values are the same as the existing **updateSIPAccount** command.

- **Request**

```

{
  "request": {
    "action": "addSIPAccountAndUser",
    "cookie": "sid343971159-1551949394",
    "extension": "1001",
    "max_contacts": "3",
    "permission": "internal",
    "language": "ch",
    "secret": "Abc123456!",
    "vmsecret": "Abc123456!",
    "user_password": "Abc123456!",
    "wave_privilege_id": "0",
    "presence_settings":
      [{
        "presence_status": "available",
        "cfu_destination_type": "1",
        "cfb_destination_type": "0",
        "cfn_destination_type": "5",
        "cfu_timetype": "0",
        "cfb_timetype": "0",
        "cfn_timetype": "0",
        "cfu": "6000",
        "cfn": "6500",
        "cfb": ""
      }, {
        "presence_status": "away",
        "cfu_destination_type": "5",
        "cfb_destination_type": "0",
        "cfn_destination_type": "0",
        "cfu_timetype": "0",
        "cfb_timetype": "0",
        "cfn_timetype": "0",
        "cfu": "6500",
        "cfn": "",
        "cfb": ""
      }, {
        "presence_status": "chat",
        "cfb": null,
        "cfn": null,
        "cfu": null,
        "cfb_timetype": 0,
        "cfn_timetype": 0,
        "cfu_timetype": 0,
        "cfb_destination_type": "0",
        "cfn_destination_type": "0",
        "cfu_destination_type": "0"
      }, {
        "presence_status": "userdef",
        "cfu_destination_type": "0",
        "cfb_destination_type": "0",
        "cfn_destination_type": "0",
        "cfu_timetype": "0",
        "cfb_timetype": "0",
        "cfn_timetype": "0",
        "cfu": "",
        "cfn": "",
        "cfb": ""
      }, {
        "presence_status": "unavailable",
        "cfb": null,
        "cfn": null,
        "cfu": null,
        "cfb_timetype": 0,
        "cfn_timetype": 0,
        "cfu_timetype": 0,
        "cfb_destination_type": "0",
        "cfn_destination_type": "0",
        "cfu_destination_type": "0"
      }
    ]
  }
}

```

○ Response

```
{
  "response": {
    "need_apply": "yes"
  },
  "status": 0
}
```

deleteUser

Delete an existing SIP extension.

Supported parameters:

Key Word	Value	Mandatory	Type	Note
Request Parameters				
cookie		yes	string	Return needed value after login. All requests must include this value. If not

				ki e is in cl u d e d, er r o r c o d e - 6 w il l b e re tu r n e d.
user_name		yes	string	T h e e xt e n si o n n u m b er

o Request

```
{
  "request":{
    "action":"deleteUser",
    "cookie":"sid1466367100-1946280676",
    "user_name":"1003"
  }
}
```

o Response

```
{
  "response": {
    "need_apply": "yes"
  },
  "status": 0
}
```

listAccount

The "listAccount" action will return information about the extensions created on the UCM, such as the extension's number, its name etc.

Note

The needed information, can be defined in the parameter "**options**".

Request

```
{
  "request":{
    "action":"listAccount",
    "cookie":"sid877877-1574437822",
    "item_num":"30",
    "options":"extension,account_type,fullname,status,addr",
    "page":"1",
    "sidx":"extension",
    "sord":"asc"
  }
  #If only the action and the cookie were defined, this will
  return all the available account
}
```

Response

```
{
  "response":{
    "account":[
      {
        "account_type":"SIP(WebRTC) ",
        "addr":"-",
        "extension":"1000",
        "fullname":null,
        "status":"Unavailable"
      },
      {
        "account_type":"SIP(WebRTC) ",
        "addr":"192.168.5.95:62144",
        "extension":"1102",
        "fullname":null,
        "status":"Idle"
      },
    ],
    "page":1,
    "total_item":2,
    "total_page":1
  },
  "status":0
}
```

Key Word	Value	Mandatory	Type	Note
Request Parameter				
cookie		yes	string	Returned value after login. All requests must include this value. If no cookie is included, error code -6 will be returned.

page		no	int	Retrieves the extensions on the specified page. This page is based on the value for the item_num parameter. If item_num is unspecified, all items will be on page 1.
item_num		no	int	Maximum number of extensions to retrieve for the query. If unspecified, all extensions will be returned. This also indicates the number of items per page for the page parameter
sord	acs, desc	no	string	Sorting method. acs stands for ascending, and desc stands for descending.
sidx		no	string	Sort according to the index.
options	extension, account_type, fullname, out_of_service, status, addr, urgemsg, newms, oldmsg	no	string	Specify the extension details to retrieve and display. Multiple items can be entered and must be separated by commas. If unspecified, all details will be returned.
Successful response:				
status	0	yes	int	Successful response, status is 0
account		yes	Json array	Account List
total_item		yes	int	Total number of items on the list
total_page		yes	int	Total number of items on the list
page		yes	int	Page the extensions are on.
extension		yes	string	Extension number.
account_type	SIP, IAX, FXS, SIP(Web RTC)	no	string	Extension type.
fullname		no	string	Caller ID Name, which consists of first_name, space, and last name.

out_of_service	Yes, no	no	string	Indicates whether the extension is out of service
status	Idle, InUse, Busy, Unavailable, Ringing	no	string	Just “Extension status” is fine.
addr		no	string	IP address and port number of registered extensions. If there are multiple devices under the same account, they will be separated by commas.
urgmsg		no	int	Number of urgent messages.
newmsg		no	int	Number of new messages.
oldmsg		no	int	Number of old messages.
presence_status	unavailable, available, away, chat, dnd, userdef	no	string	Presence status. Only SIP extensions support presence status.
presence_def_script				Custom presence status. If presence_status is userdef, this parameter’s value will be used.
user_name		no	string	Typically the same as extension number.
email_to_user		no	string	Indicates whether or not to send email notifications to an extension’s configured email address if the extension gets updated.
Failed response:				
status		yes	int	Please see the error code list for more details.

listAccount

getSIPAccount

The “getSIPAccount” action will return information about specific extension.

o Request

```
{
  "request": {
    "action": "getSIPAccount",
    "cookie": "sid877877-1574437822",
    "extension": "1000"
  }
}
```

- **Response**

```
{
  "response":{
    "cti_feature_privilege":{
      "active_call":"no",
      "callbarge":"no",
      "extension_status":"no",
      "hangup":"no"
    },
    "extension":{
      "account_type":"SIP(WebRTC) ",
      "alertinfo":null,
      "allow":"ulaw,alaw,gsm,g726,g722,g729,h264,ilbc",
      "authid":null,
      "auto_record":"off",
      "bypass_outrt_auth":"no",
      "call_waiting":"yes",
      "callbarging_monitor":"",
      "cc_agent_policy":"never",
      "cc_max_agents":1,
      "cc_max_monitors":2,
      "cc_monitor_policy":"never",
      "cidnumber":"1000",
      "custom_autoanswer":"no",
      "directmedia":"no",
      "dnd":"no",
      "dnd_timetype":0,
      "dndwhitelist":"",
      "dtmfmode":"rfc2833",
      "emergcidnumber":null,
      "en_ringboth":"no",
      "enable_ldap":"yes",
      "enable_qualify":"no",
      "enable_webrtc":"yes",
      "enablehotdesk":"no",
      "encryption":"no",
      "extension":"1000",
      "external_number":null,
      "fax_gateway":"no",
      "faxdetect":"no",
      "fullname":null,
      "fwdwhitelist":null,
      "hasvoicemail":"yes",
      "ice_support":"yes",
      "intranet_ip_filter":"no",
      "limitime":null,
      "local_network1":null,
      "local_network10":null,
      "local_network2":null,
      "local_network3":null,
      "local_network4":null,
      "local_network5":null,
      "local_network6":null,
      "local_network4":null,
      "local_network5":null,
      "local_network6":null,
      "local_network7":null,
      "local_network8":null,
      "local_network9":null,
      "max_contacts":1,
      "media_encryption":"auto_dtls",
      "missed_call":"no",
      "mohsuggest":"default",
      "nat":"yes",
      "out_of_service":"no",
      "permission":"internal",
      "presence_def_script":null,
      "presence_status":"available",
      "qualify":1000,
      "qualifyfreq":60,
      "ring_timeout":null,
      "ringboth_timetype":0,
      "sca_enable":"no",
      "seamless_transfer_members":"",
      "secret":"pas0",
      "sendtofax":null,
      "skip_auth_timetype":0,
      "skip_vmsecret":"no",
      "specific_ip":null,
      "strategy_ipacl":0,
      "t38_udptl":"no",
      "tel_uri":"disabled",
      "use_avpf":"yes",
      "use_callee_dod_on_fm":"no",
      "use_callee_dod_on_fwd_rb":"no",
      "user_outrt_passwd":null,
```

```

        "vmsecret":"5333"
    },
    "sip_presence_settings":[
        {
            "cfb":null,
            "cfb_destination_type":"0",
            "cfb_timetype":0,
            "cfn":null,
            "cfn_destination_type":"0",
            "cfn_timetype":0,
            "cfu":null,
            "cfu_destination_type":"0",
            "cfu_timetype":0,
            "presence_status":"available"
        },
        "sip_presence_settings":[
            {
                "cfb":null,
                "cfb_destination_type":"0",
                "cfb_timetype":0,
                "cfn":null,
                "cfn_destination_type":"0",
                "cfn_timetype":0,
                "cfu":null,
                "cfu_destination_type":"0",
                "cfu_timetype":0,
                "presence_status":"available"
            },
            {
                "cfb":null,
                "cfb_destination_type":"0",
                "cfb_timetype":0,
                "cfn":null,
                "cfn_destination_type":"0",
                "cfn_timetype":0,
                "cfu":null,
                "cfu_destination_type":"0",
                "cfu_timetype":0,
                "presence_status":"away"
            },
            {
                "cfb":null,
                "cfb_destination_type":"0",
                "cfb_timetype":0,
                "cfn":null,
                "cfn_destination_type":"0",
                "cfn_timetype":0,
                "cfu":null,
                "cfu_destination_type":"0",
                "cfu_timetype":0,
                "presence_status":"chat"
            },
            {
                "cfb":null,
                "cfb_destination_type":"0",
                "cfb_timetype":0,
                "cfn":null,
                "cfn_destination_type":"0",
                "cfn_timetype":0,
                "cfu":null,
                "cfu_destination_type":"0",
                "cfu_timetype":0,
                "presence_status":"unavailable"
            },
            {
                "cfb":null,
                "cfb_destination_type":"0",
                "cfb_timetype":0,
                "cfn":null,
                "cfn_destination_type":"0",
                "cfn_timetype":0,
                "cfu":null,
                "cfu_destination_type":"0",
                "cfu_timetype":0,
                "presence_status":"userdef"
            }
        ],
        "voicemail":{
            "vm_attach":null,
            "vm_reserve":null
        }
    },
    "status":0
}

```

Note

If you only want to get some parameters regarding a specific extension, users can specify that parameter in the sending request.

Key Word	Value	Mandatory	Type	Note
Request Parameter				
cookie		yes	string	Returned value after login. All requests must include this value. If no cookie is included, error code -6 will be returned.
extension	Existing extension number	yes	string	Specify which extension's configuration to retrieve.
Successful response				
status	0	yes	int	The response is successful, status is 0.
extension		no	JsonObject	The specific configuration of the extension.
account_type	SIP, IAX, FXS, SIP(WebRTC)	no	string	Extension type.
fullname		no	string	Caller ID Name, which consists of first_name, space, and last name.
hasvoicemail	yes, no	no	string	Indicates whether voicemail is enabled or disabled.
cidnumber		no	string	Caller ID of incoming calls.
secret		no	string	SIP/IAX password.
vmsecret		no	string	Voicemail password.
skip_vmsecret	Yes, no	no	string	Indicates whether an extension will need to enter a password when dialing into voicemail.
ring_timeout		no	int	Extensions' ring timeout. If unspecified, the system ring timeout will be used. Default is 60 seconds.

auto_record	all, external, internal, off	no	string	Auto-recording. all: all incoming calls to the extension will be recorded external: only calls to external numbers will be recorded. internal: only calls to internal numbers will be recorded. off: No calls will be recorded.
encryption	no, yes, support	no	string	SRTP encryption mode. Set whether to turn on SRTP mode to encrypt RTP streams. Support: Enable but not forced.
faxdetect	no, yes	no	string	Configure the mode of using fax. There are 2 available settings. The default is “no”. no: Disable fax related features. yes (Fax detection): Fax signals from this user or the trunk can be detected during a call. The received fax will be sent to the email address set for the user. If the user's email address is not configured, the fax will be sent to the default email address set on the fax page.
sendtofax	yes, no	no	string	Indicates whether fax will also be sent to the extension's configured email address when receiving a fax call.
strategy_ipacl	0,1,2	no	int	Indicates the device's ACL policy. 0(Allow All): Any IP address can register to this extension. 1(Local Network): Only IP addresses in the configured subnets can register to this extension. Devices on the UCM's subnet is allowed by default. Up to 10 subnets can be added. 2 (Special IP address): This option seems to have been merged with 1 (Local Network) in 1.0.20.x
local_networkk1		no	string	local_network1-10 are the subnets that are allowed to register to the extension when 1 is configured as the value for strategy_ipacl .

local_network2		no	string	
local_network3		no	string	
local_network4		no	string	
local_network5		no	string	
local_network6		no	string	
local_network7		no	string	
local_network8		no	string	
local_network9		no	string	
local_network10		no	string	
specific_ip		no	string	When the policy is 2, that is, Special IP Address, Format is xxx.xxx.xxx.xxx or xxx:xxx:xxx:xxx:xxx:xxx:xxx:xxx:xxx.
allow	ulaw, alaw, gsm, g726, g722, g729, h264, ilbc, g726aal2, adpcm, g723, h263, h263p, vp8, opus, h265, rtx	no	string	The extension's supported codecs. Several codecs can be configured for a single extension.
dnd	yes, no	no	string	Indicates DND status. If set to yes, all calls will be ignored, and the extension's call forwarding rules will not take effect
dnd_time_type	0,1,2,3,4,5,6,8	no	int	The time conditions where DND status will be enabled. 0: All Time 1: Office Time 2: Out of Office Time 3: Holiday 4: Out of Holiday 5: Out of office time or holiday 6: Specific time 8: Office time and out of holiday

permission	internal, internal- local, internal- local- national, internal- local- national- international	no	string	Outbound call permissions of the extension. internal: Internal internal-local: Local internal-local-national: Nationwide internal-local-national-international: International
nat	yes, no	no	string	Indicates whether the extension is behind a NAT. If the UCM is using a public IP address to communicate with devices behind NAT, one-way audio issues may occur if this option is not enabled, NAT is not configured properly, or if SIP/RTP ports are not supported by the firewall.
bypass_outrt_auth	no, yes, bytime	no	string	Indicates whether the extension can skip password authentication when dialing out of a trunk yes: Users will not need to enter a password when dialing out of a trunk. bytime: Users will not need to enter a password when dialing out of a trunk only during the specified time condition.
skip_auth_timetype	0,1,2,3,4,5,6,8	no	int	Time condition where the extension will be able to dial out of a trunk without needing to enter a password. 0: All Time 1: Office Time 2: Out of Office Time 3: Holiday 4: Out of Holiday 5: Out of office time or holiday 6: Specific time 8: Office time and out of holiday
t38_udptl	yes, no	no	string	Indicates whether T.38 support is toggled on or off
directmedia	yes, no	no	string	Indicates whether direct media is enabled or not. No: The PBX will route RTP media streams from SIP endpoints through itself. Yes: The PBX will attempt to redirect RTP media streams so that they are only between caller and callee. Note: It is not always

				possible for the UCM to negotiate endpoint-to-endpoint media routing.
dtmfmode	rfc4733, info, inband, auto	no	string	<p>Indicates the DTMF signaling sent from the extension</p> <p>Info: Signaling is transmitted through SIP messages.</p> <p>Inband: Signaling is transmitted in audio streams. Requires PCMU and PCMA codec support.</p> <p>RFC4733: Signaling is transmitted as audio but is encoded separately from the audio stream.</p> <p>Auto: Selects the signaling to use based on negotiation. Signaling is preferred in the following priority: RFC4733, Inband, Info</p>
enable_qualify	yes, no	no	string	<p>Indicates whether keep-alive is enabled for this extension.</p> <p>Yes: The PBX periodically sends SIP OPTION messages to the extension endpoint to monitor and maintain UCM's connection to the endpoint.</p>
qualifyfreq		no	int	<p>Keep-alive Frequency.</p> <p>Indicates how often keep-alive messages are sent to this extension's endpoints.</p>
authid		no	string	<p>Authentication ID.</p> <p>This is the SIP service subscriber's ID used for authentication. If not configured, the Extension Number will be used for authentication.</p>
tel_uri	disabled, user_phone, enabled	no	string	<p>TEL URI.</p> <p>Enabled: TEL URI and Remove OBP from Route cannot be enabled at the same time. "Tel:" will be used instead of "SIP:" in the SIP request.</p> <p>User_Phone: If the phone has an assigned PSTN telephone number, this field should be set. A "User=Phone" parameter will then be attached to the Request-Line and "TO" header in the SIP request to indicate the E.164 number.</p>
enablehotdesk	no, yes	no	string	<p>Indicates whether hotdesking is enabled for this extension.</p>

				Yes: SIP Password will accept only alphanumeric characters; Extension will be used for AuthID.
user_outrt_password		no	string	Dial Trunk Password Password that must be entered by the extension to dial out.
out_of_service	yes, no	no	string	Indicates whether the “Disable this Extension” option is toggled on or off for this extension. Yes: The extension is disabled. No: The extension is enabled.
mohsuggest	default, ringbacktone_default,	no	string	Music on Hold. Indicates the Music on Hold playlist to use when putting parties on hold.
en_ringboth	no, yes	no	string	Ring Simultaneously: Indicates whether the “Ring Simultaneously” option is toggled on or off for this extension If enabled, both this extension and the configured external number will be rung at the same time. If the calling the external number requires the use of a register trunk, the register trunk’s number will be displayed to the caller. Failover trunks cannot be used for Ring Simultaneously calls.
external_number		no	string	The external number configured for Ring Simultaneously. Hyphens (-) are ignored
use_callee_dod_on_fwd_rb	no, yes	no	string	Indicates whether the callee’s DOD number will be used as CID for forwarded calls or Ring Simultaneously calls
use_callee_dod_on_fm	no, yes	no	string	Use Callee DOD for Follow Me Indicates whether to the callee’s DOD number will be used as CID for Follow Me calls.
ringboth_timetype	0,1,2,3,4,5, 6, 8	no	int	Time Condition for Ring Simultaneously The time conditions when Ring Simultaneously will be

				<p>used</p> <p>0: All Time</p> <p>1: Office Time</p> <p>2: Out of Office Time</p> <p>3: Holiday</p> <p>4: Out of Holiday</p> <p>5: Out of office time or holiday</p> <p>6: Specific time</p> <p>8: Office time and out of holiday</p>
enable_ldap	yes, no	no	string	<p>Enable LDAP</p> <p>Indicates whether this extension can be added to LDAP phonebooks.</p>
max_contacts		no	int	<p>Concurrent Registrations</p> <p>The maximum allowed number of endpoints that can register to this extension. Supported values: 1-10</p>
custom_auto_answer	no, yes	no	string	<p>Custom Call-info for Auto Answer</p> <p>Indicates whether the extension supports auto-answer when denoted in Call-info and Alert-info headers.</p>
sca_enable	no, yes	no	string	<p>Enable SCA</p> <p>Indicates whether or not SCA is enabled for the extension</p>
call_waiting	yes, no	no	string	<p>Call Waiting</p> <p>Indicates whether calls can be made to the extension while it is already in a call. If disabled, CC service and Call Forward Busy will not work.</p>
emergcidnumber		no	string	<p>Emergency Calls CID</p> <p>CallerID number that will be used when calling out and receiving direct callbacks.</p>
enable_webrtc	yes, no	no	string	<p>Enable WebRTC Support</p> <p>Indicates whether this extension supports WebRTC registration and calling.</p>
alertinfo	none, ring1, ring2, ring3, ring4, ring5, ring6, ring7, ring8, ring9, ring10, Bellcore-dr1,			<p>Alert-info</p> <p>Indicates the alert-info header that will be used in the extension's INVITE requests to specify a ring tone to be used by the UAS.</p>

	Bellcore-dr2 Bellcore-dr3, Bellcore-dr4, Bellcore-dr5, custom			
limitime		no	int	Maximum Call Duration Indicates the maximum duration of this extension's calls. The default value 0 means no limit.
dndwhitelist		no	string	DND whitelist Displays the numbers that can call this extension even if it has DND enabled. Multiple numbers are separated by commas.
fwdwhitelist		no	string	Forward Whitelist Displays the numbers that will ignore this extension's call forwarding rules when calling in. Multiple numbers are separated by commas
callbarging_monitor		no	string	Allow call-barging Displays the extensions that can barge in and monitor this extensions' calls via feature code.
seamless_transfer_members		no	string	Allowed to seamless transfer Displays the extensions that can seamlessly transfer to this extension.
sip_presence_settings			Json array	The specific configuration content of the online status of the SIP extension. The specific content needs to specify which state the presence_status is. "sip_presence_settings": [{ "presence_status": "available", "cfb":"6000" , "cfn": null, "cfu": null, "cfb_timetype": 1, "cfn_timetype": 0, "cfu_timetype": 0, "cfb_destination_type": "0", "cfn_destination_type": "0", "cfu_destination_type": "0" } , { "presence_status": "unavailable", "cfb": null, "cfn": "12345", "cfu": null, "cfb_timetype": 0,

				"cfb_timetype": 2, "cfu_timetype": 0, "cfb_destination_type": "0", "cfn_destination_type": "0", "cfu_destination_type": "0" }] When available, cfb to extension 6000; When unavailable, cfn to custom extension 12345.
presence_status	available, away, chat, dnd, userdef, unavailable	no	string	Presence status of this extension. Default is Available.
cfb		no	string	Call Forward Busy (CFB) destination. Callers will be redirected to this number if the extension is busy.
cfn		no	string	Call Forward No Answer (CFNA) Destination Callers will be redirected to this number if calls to the extension are not answered before ring timeout. Note: If unspecified, this feature is disabled.
cfu		no	string	Call Forward Unconditional (CFU) destination. Callers will always be redirected to this number.
cfb_timetype	0,1,2,3,4,5, 6,8	no	string	Call forward busy based on this time condition. CFB will be active only during the selected time condition. 0: All Time 1: Office Time 2: Out of Office Time 3: Holiday 4: Out of Holiday 5: Out of office time or holiday 6: Specific time 8: Office time and out of holiday
cfn_timetype	0,1,2,3,4,5, 6,8	no	string	Call forward no answer based on this time condition. CFNA will be active only during the selected time condition. 0: All Time 1: Office Time 2: Out of Office Time 3: Holiday 4: Out of Holiday 5: Out of office time or holiday 6: Specific time

cfu_timetype	0,1,2,3,4,5,6,8	no	string	<p>Call forward unconditional based on this time condition. CFU will be active only during the selected time condition.</p> <p>0: All Time 1: Office Time 2: Out of Office Time 3: Holiday 4: Out of Holiday 5: Out of office time or holiday 6: Specific time 8: Office time and out of holiday</p>
cfb_destination_type	0,1,2,3,4,5,6,8			<p>Extension type of the CFB destination. If unspecified, CFB will be disabled.0: None 1: Extension 2: Custom Number 3: Voicemail 4: Ring Group 5: Queues 6: Voicemail Group</p>
cfn_destination_type	0,1,2,3,4,5,6,8			<p>Extension type of the CFNA destination. If unspecified, CFNA will be disabled. 0: None 1: Extension 2: Custom Number 3: Voicemail 4: Ring Group 5: Queues 6: Voicemail Group</p>
cfu_destination_type	0,1,2,3,4,5,6,8			<p>Extension type of the CFU destination. If unspecified, CFU will be disabled 0: None 1: Extension 2: Custom Number 3: Voicemail 4: Ring Group 5: Queues 6: Voicemail Group</p>
voicemail		no	JsonObject	<p>Specific Configuration of voicemail. "voicemail": { "vm_attach": null, "vm_reserve": null }</p>
vm_attach	NULL, yes, no	no	string	<p>Send voicemail to email NULL: "Default". Global voicemail settings in the Voicemail page will be used</p>
vm_reserve	NULL, yes, no	no	string	<p>Keep Voicemail after Emailing Only applicable when either condition is fulfilled:</p>

				1. Edit Extension→Send Voicemail to Email is enabled. 2. Voicemail→Voicemail Email Settings→Send Voicemail to Email is enabled and Edit Extension→Send Voicemail to Email is set to “Default”. Global voicemail settings in the Voicemail page will be used. “Default”. Global voicemail settings in the Voicemail page will be used.
Failed response				
status		yes	int	Please see the error code list for more details.

getSIPAccount

updateSIPAccount

This action will allow users to update an existing SIP account.

◦ Request

```
{
  "request":{
    "action":"updateSIPAccount",
    "cookie":"sid719338887-1574671289",
    "extension":"1000",
    "permission":"internal"
  }
}
```

◦ Response

```
{
  "response":{
    "extension":{
      "alertinfo":null,
      "extension":"1000"
    }
  },
  "status":0
}
```

Note

Editing presence configuration requires sending the entire json list of sip_presence_settings. Make sure to specify the presence status when updating presence settings.

Key Word	Value	Mand atory	Typ e	Note
Request Parameter				

cookie		yes	string	Returned value after login. All requests must include this value. If no cookie is included, error code -6 will be returned.
extension	Required . 2-18 digits	yes	string	Specify which extension's configuration to retrieve.
hasvoicemail	yes, no	no	string	Indicates whether voicemail is enabled or disabled.
cidnumber		no	string	Caller ID of incoming calls.
secret		no	string	SIP/IAX password.
vmsecret		no	string	Voicemail password.
skip_vmsecret	Yes, no	no	string	Indicates whether an extension will need to enter a password when dialing into voicemail.
ring_timeout	Value between 3 and 600. Can be set to "null". When set to null, global settings will be used.	no	int	Ring Timeout when set to NULL, the system default ring timeout is used.
auto_record	all, external, internal, off	no	string	Auto-recording. all: all incoming calls to the extension will be recorded external: only calls to external numbers will be recorded. internal: only calls to internal numbers will be recorded. off: No calls will be recorded.
encryption	no, yes, support	no	string	SRTP encryption mode. Set whether to turn on SRTP mode to encrypt RTP streams. Support: Enable but not forced.
faxdetect	no, yes	no	string	Configure the mode of using fax. There are 2 available settings. The default is "no". no: Disable fax related features. yes (Fax detection): Fax signals from this user or the trunk can be detected during a call. The received fax will be

				sent to the email address set for the user. If the user's email address is not configured, the fax will be sent to the default email address set on the fax page.
sendtofax	yes, no	no	string	Indicates whether fax will also be sent to the extension's configured email address when receiving a fax call.
strategy_ipacl	0,1,2	no	int	Indicates the device's ACL policy. 0(Allow All): Any IP address can register to this extension. 1(Local Network): Only IP addresses in the configured subnets can register to this extension. Devices on the UCM's subnet is allowed by default. Up to 10 subnets can be added. 2 (Special IP address): This option seems to have been merged with 1 (Local Network) in 1.0.20.x
local_network 1		no	string	local_network1-10 are the subnets that are allowed to register to the extension when 1 is configured as the value for strategy_ipacl .
local_network 2		no	string	
local_network 3		no	string	
local_network 4		no	string	
local_network 5		no	string	
local_network 6		no	string	
local_network 7		no	string	
local_network 8		no	string	
local_network 9		no	string	
local_network 10		no	string	

specific_ip	IP address	no	string	When the policy is 2, that is, Special IP Address, Format is xxx.xxx.xxx.xxx or xxxxx:xxxx:xxxx:xxxx:xxxx:xx:xxxx:xxxx.
allow	ulaw,alaw,gsm,g726,g729,h264,ilbc,g726aal2,adpcm,g723,h263,h263p,vp8,opus,h265,rtx	no	string	The extension's supported codecs. Several codecs can be configured for a single extension.
dnd	yes, no	no	string	Do Not Disturb. yes: All calls will be ignored, and the call forward unconditional/ no answer/ busy of the extension will not take effect.
dnd_timetype	0,1,2,3,4,5,6,8	no	int	The time conditions where DND status will be enabled. 0: All Time 1: Office Time 2: Out of Office Time 3: Holiday 4: Out of Holiday 5: Out of office time or holiday 6: Specific time 8: Office time and out of holiday
permission	internal, internal-local, internal-local-national, internal-local-national-international	no	string	Select outbound permission. internal: internal internal-local: local internal-local-national: nationwide internal-local-national-international: international
nat	yes, no	no	string	NAT is used when UCM uses public IP and communicates with devices hidden behind a NAT network, such as a broadband router. You may encounter one-way audio problem. This type of problem is often associated with NAT configuration or SIP and RTP ports supported by the firewall.
bypass_outrt_auth	no, yes, bytime	no	string	Skip trunk authentication. yes: When dialing an external line, the user does not need to

				enter a password; bytime: dial an external line in the set time condition, the user does not need to enter a password.
skip_auth_time_type	0,1,2,3,4,5,6,8	no	int	Time condition where the extension will be able to dial out of a trunk without needing to enter a password. 0: All Time 1: Office Time 2: Out of Office Time 3: Holiday 4: Out of Holiday 5: Out of office time or holiday 6: Specific time 8: Office time and out of holiday
t38_udptl	yes, no	no	string	Whether to support T.38 UDPTL.
directmedia	yes, no	no	string	Whether to enable direct media. No: the PBX will route the media streams from SIP endpoints through itself. Yes: the PBX will attempt to redirect the RTP media streams to bypass the PBX and to go directly between caller and callee. Note: It is not always possible for the PBX to negotiate endpoint-to-endpoint media routing.
dtmfmode	rfc4733, info, inband, auto	no	string	Default mode of sending DTMF signal. The DTMF signal is carried by the info method of SIP signaling. Inband: Requires 64kbit codec PCMU and PCMA. Auto: Adaptive preference is for RFC2833, followed by inband.
enable_qualify	yes, no	no	string	Enable keeping-alive. Yes: The PBX periodically sends SIP OPTION signaling to detect if the host is online
qualifyfreq	Required . Set a value between 1 and 3600.	no	int	Keep-alive Frequency. When the host is on, set the interval of sending keep-alive messages measured in seconds.
authid	Up to 32 characters	no	string	Authentication ID. This is the SIP service subscriber's ID used for authentication. If not

	excludin g space., ;:?"() <>@,√[] ={}.			configured, the Extension Number will be used for authentication.
tel_uri	disabled, user_pho ne, enabled	no	string	TEL URI. Enabled: TEL URI and Remove OBP from Route cannot be enabled at the same time. "Tel:" will be used instead of "SIP:" in the SIP request. User_Phone: If the phone has an assigned PSTN telephone number, this field should be set. A "User=Phone" parameter will then be attached to the Request-Line and "TO" header in the SIP request to indicate the E.164 number.
enablehotdesk	no, yes	no	string	Support Hot-desking Mode yes: SIP Password will accept only alphanumeric characters; Extension will be used for AuthID.
user_outrt_pas swd	4-10 digits	no	string	Dial Trunk Password Configure personal password when making outbound calls.
out_of_service	yes, no	no	string	Whether to disable this extension yes: disable no: enable
mohsuggest	Required : default, ringback tone_def ault, MoH playlist name, etc	no	string	Music on Hold. Specify which Music on Hold class to suggest to the bridged channel when putting them on hold.
en_ringboth	no, yes	no	string	Ring Simultaneously If you want the extension and external number to ring simultaneously, check this box. If you use register trunk for outbound calls, the caller will display the registered number. The outbound call will use only the main trunk. The failover trunk will not be used.
external_numbr	Up to 32 alphanu meric character s and special	no	string	Set the external number for Ring Simultaneously. "-" is the connection character and will be ignored.

	character s +-*#			
use_callee_dod_on_fwd_rb	no, yes	no	string	yes: Use the callee's DOD number as callerID on Outgoing Forwarding or Ring Simultaneously calls.
use_callee_dod_on_fm	no, yes	no	string	Use Callee DOD for Follow Me Use the callee DOD number as CID if configured Follow Me numbers are external numbers.
ringboth_timetype	0,1,2,3,4,5,6, 8	no	int	Time Condition for Ring Simultaneously The time conditions when Ring Simultaneously will be used 0: All Time 1: Office Time 2: Out of Office Time 3: Holiday 4: Out of Holiday 5: Out of office time or holiday 6: Specific time 8: Office time and out of holiday
enable_ldap	yes, no	no	string	Enable LDAP yes: If enabled, the extension will be added to LDAP Phonebook PBX lists.
max_contacts	Value between 1 and 10	no	int	Concurrent Registrations The maximum endpoints which can be registered to this extension. Value: 1-10.
custom_autoanswer	no, yes	no	string	Custom Call-info for Auto Answer yes: If checked, the invite message sent to the extension will contain a Call-info header to indicate auto answer.
sca_enable	no, yes	no	string	Enable SCA.
call_waiting	yes, no	no	string	Call waiting yes: Allows calls to the extension even when it is already in a call. This only works if the caller is directly dialing the extension. If disabled, the CC service and busy in-call forward will not work.
emergcidnumber	2-32 alphanumeric characters	no	string	Emergency Calls CID CallerID number that will be used when calling out and receiving direct callbacks.

enable_webrtc	yes, no	no	string	Enable WebRTC Support Enable registration and call from WebRTC.
alertinfo	none, ring1, ring2, ring3, ring4, ring5, ring6, ring7, ring8, ring9, ring10, Bellcore -dr1, Bellcore -dr2 Bellcore -dr3, Bellcore -dr4, Bellcore -dr5, custom			Alert-info When present in an INVITE request, the Alert-info header field specifies an alternative ring tone to the UAS.
limitime	Value between 0 and 86400	no	int	Maximum Call Duration The maximum call duration (in seconds). The default value 0 means no limit.
dndwhitelist		no	string	DND whitelist Multiple numbers are supported and separated by commas.
fwdwhitelist		no	string	Forward Whitelist Set extension numbers, multiple can be separated by commas. Calls from users in the forward whitelist will not be forwarded.
callbarging_monitor		no	string	Set up Allow call-barging list. Members of the list can spy on this extension via feature codes. Multiple extensions can be set, separated by commas.
seamless_transfer_members		no	string	Set up Allow to seamless transfer list. Members of the list can seamlessly transfer via feature code. Multiple extensions can be set, separated by commas.
sip_presence_settings			Json array	The specific configuration content of the online status of the SIP extension. The specific content needs to specify which state the presence_status is. "sip_presence_settings": [{ "presence_status": "available", "cfn":"6000" ,

				<pre>"cfn": null, "cfu": null, "cfb_timetype": 1, "cfn_timetype": 0, "cfu_timetype": 0, "cfb_destination_type": "0", "cfn_destination_type": "0", "cfu_destination_type": "0" }, { "presence_status": "unavailable", "cfb": null, "cfn": "12345", "cfu": null, "cfb_timetype": 0, "cfn_timetype": 2, "cfu_timetype": 0, "cfb_destination_type": "0", "cfn_destination_type": "0", "cfu_destination_type": "0" }]</pre> <p>When available, cfb to extension 6000; When unavailable, cfn to custom extension 12345.</p>
presence_status	available , away, chat, dnd, userdef, unavailable	no	string	<p>Set the presence status of this extension. Default is Available. To set the transfer destination, configure call transfer.</p>
cfb		no	string	<p>Configure the target number to be forwarded to for Call Forward Busy(CFB). Incoming calls during busy time will be forwarded to the entered extension. Corresponds to the extension number under the cfb_destination_type type.</p>
cfn		no	string	<p>Configure the target number to be forwarded to for Call Forward No Answer(CFN). Incoming calls that are not answered after ring timeout will be forwarded to the entered extension. Note: If not specified, this feature is disabled. Corresponds to the extension number under the cfn_destination_type type.</p>
cfu		no	string	<p>Configure the target number to be forwarded to for Call Forward Unconditional(CFU). All incoming calls will be forwarded to the entered extension unconditionally. Corresponds to the extension number under the cfu_destination_type type.</p>

cfb_timetype	0,1,2,3,4 ,5,6,8	no	string	<p>Call forward busy based on this time condition. CFB will be active only during the selected time condition.</p> <p>0: All Time 1: Office Time 2: Out of Office Time 3: Holiday 4: Out of Holiday 5: Out of office time or holiday 6: Specific time 8: Office time and out of holiday</p>
cfn_timetype	0,1,2,3,4 ,5,6,8	no	string	<p>Call forward no answer based on this time condition. CFNA will be active only during the selected time condition.</p> <p>0: All Time 1: Office Time 2: Out of Office Time 3: Holiday 4: Out of Holiday 5: Out of office time or holiday 6: Specific time</p>
cfu_timetype	0,1,2,3,4 ,5,6,8	no	string	<p>Call forward unconditional based on this time condition. CFU will be active only during the selected time condition.</p> <p>0: All Time 1: Office Time 2: Out of Office Time 3: Holiday 4: Out of Holiday 5: Out of office time or holiday 6: Specific time 8: Office time and out of holiday</p>
cfb_destination_type	0,1,2,3,4 ,5,6			<p>Extension type of the CFB destination. If unspecified, CFB will be disabled.0: None 1: Extension 2: Custom Number 3: Voicemail 4: Ring Group 5: Queues 6: Voicemail Group</p>
cfn_destination_type	0,1,2,3,4 ,5,6			<p>Extension type of the CFNA destination. If unspecified, CFNA will be disabled.</p> <p>0: None 1: Extension 2: Custom Number 3: Voicemail 4: Ring Group 5: Queues 6: Voicemail Group</p>

cfu_destinatio n_type	0,1,2,3,4 ,5,6			Extension type of the CFU destination. If unspecified, CFU will be disabled 0: None 1: Extension 2: Custom Number 3: Voicemail 4: Ring Group 5: Queues 6: Voicemail Group
vm_attach	yes, no If set to NULL, global setting will be used.	no	string	Send voicemail to email NULL: the global setting will be used.
vm_reserve	Yes, no, NULL If set to NULL, global setting will be used.	no	string	Keep Voicemail after Emailing Only applies if extension-level is enabled or global Send Voicemail to Email is enabled and extension-level is default. NULL: the global setting will be used.
Successful response				
status	0	yes	int	Successful response, status is 0
Failed response				
status		yes	int	Please see the error code list for more details.

updateSIPAccount

listDepartment

This action lists the information included in the department management.

Request

```
{
  "request":{
    "action":"listDepartment",
    "cookie":"sid586289962-1731511039"
  }
}
```

Response

```

{
  "response":{
    "local_department_info":[
      {
        "auth":"",
        "cloud_department_id":3042,
        "cloud_father_id":0,
        "department_id":1,
        "father_id":0,
        "name":"Grandstream EMEA",
        "policy_id":1,
        "type":0,
        "users_cnt":0
      },
      {
        "auth":"",
        "cloud_department_id":3043,
        "cloud_father_id":3042,
        "department_id":2,
        "father_id":1,
        "name":"Support ",
        "policy_id":1,
        "type":0,
        "users_cnt":0
      },
      {
        "auth":"",
        "cloud_department_id":3044,
        "cloud_father_id":3043,
        "department_id":3,
        "father_id":2,
        "name":"UC",
        "policy_id":1,
        "type":0,
        "users_cnt":0
      },
      {
        "auth":"",
        "cloud_department_id":3045,
        "cloud_father_id":3043,
        "department_id":4,
        "father_id":2,
        "name":"Networking",
        "policy_id":1,
        "type":0,
        "users_cnt":0
      }
    ]
  },
  "status":0
}

```

Notes:

- Each department has an identifier labeled *"department_id"*.
- The departments are classified in a hierarchical manner, and sub-departments are identified by the field *"father_id"*, which corresponds to the *"department_id"* of the parent department.
- The root departments have a 'father_id' of 0, indicating that they do not belong to any parent departments.

Wave

cleanTerminalChatInformation

The *"cleanTerminalChatInformation"* action allows the user to clear the chat history of the user's Wave client.

- Request**

```
{
  "request":{
    "action":"cleanTerminalChatInformation",
    "cookie":"sid1602522965-14864168234",
    "extension":"1007"
  }
}
```

o Response

```
{
  "response":{
    "need_apply":"no"
  },
  "status":0
}
```

chatTerminalChatInformation Request Parameters

Name	Supported Values	Required	Value Type	Comments
cookie		Yes	String	Cookie value is obtained after logging in via the login command. If the cookie is invalid, error code -6 will be returned.
extension		Yes	Integer	User's extension number

chatTerminalChatInformation Request Responses

If the updateUser request is successful, the following will appear:

Parameter Name	Supported Values	Value Type	Comments
status	0	Integer	Success. Status is 0.
need_apply	yes,no	String	Whether changes need to be applied to take effect.

If the cleanTerminalChatInformation request fails, the following will appear:

Parameter Name	Supported Values	Value Type	Comments
status		Integer	Error code will appear. Please refer to the list of error codes for more details.

getSIPAccountQR

Example Request

```
{
  "request":{
    "extension":"1000",
    "action":"getSIPAccountQR"
  }
}
```

Example Response:

```
{
  "response": {

    "qr_base": "iVBORw0KGgoAAAANSUheUgAAAKsAAACrAQMAAAAJv5aAAAABlBMVEUA
AAD///+12Z/dAAAAAnRSTlP//8i138cAAAAJcEhZcwaACxIAAAsSAdLdfvAAALDSUR
BVEiJ5Zc/rqQwDManUqSDCyDlGulyJbgAfy4AV6LLNSLlAkMXAuH9Msy894ot1mirXY
QofjMKY/vzZw/xby/6v3Eimo/QHbzZvmOTD2rkOPM5OBpszEVdOjQeRI6PfnL9zDTiV
M+rp/ERHixN7iR3dkXtT/HMZveBNM2F+RmuUZ6TPeeDE54/g/9jjHyPvv++v8sgwLgu
a/ajlq518YcgBDhRTxTzgSh5P0yyCZfjzIrZbDZeDkmKG31SJcHsw3yYFfl2JnsatFo
f4MripVX2EDLeYPYHuECDiK8nPJnIhU6OL1L7oZJGpkNXGyKucOzK47wGfUm8ct/4L0
FIsFOZY4b0yjk5xf50lQxfDvGpRGpBfIXIno0c86vyF4WmhJkR5UeaEvw6myZouf7GH
nIe5ZgLDhDwQ2Oqp1VLJ8bJUWsDir9QaO/OkGOGAC3kExdLHaKkd/AyjBxrNAR05d0j
8W+HEOHMJmmFQGP40TzS7H7PuB4qbhWKG10KDKD3DB2eHlmgHWuzJlcpwsBgj6+yR
tNoFWMOsDrCP6csEEYBQN3zJZjjFOZw/rNZDwBiUWxU8w/Bu1CkS3Q9walGGAwSHK6h
NQMRp0lWOUc8I5lqq+RJhvbyGLMFhTpWfYn63FSzBsXTg52ANcCuMlc0Bt9rZeGYbBt
K72JXaf+aCB+lGO2fOiMUMgZNgMBpphOc51Batrc+4W3qlv1xTiAtFBPhgg2H2gwbcg
RPhysAeaCIFC0dTqvnAiRdHXylLXcRUlnflZTjps9UYjNWxXq7Zd3KMK2GxPeBVGcb
xy6tEOL32lN2fI5Ro60bWyDH2wUmjHdHi0A68yuQHGOstVpXqVQgXDnr3pRiPJSYk3t
bpmv1Hg1KMJPm6reRDcR3UcsywhzC8PHiWjr0HowzXfGPx0fXzFvb97gYZ/iv/vP4p/
AvzqVlYIWFVRAAAAABJRU5ErkJggg=="
  },
  "status": 0
}
```

Name	Supported Values	Required	Value Type	Comments
cookie		Yes	String	Cookie value is obtained after logging in via the login command. If the cookie is invalid, error code -6 will be returned.
extension		Yes	Integer	User's extension number

If the getSIPAccountQR request is successful, the following will appear:

Parameter Name	Supported Values	Value Type	Comments
status	0	Integer	Success. Status is 0.
qr_base	B	Base64 string	To turn this string into a QR code, there are various tools available to convert Base64 strings to images. For example, on linux, the terminal command base64 -d aa.txt > test.jpg can convert the string to a QR code image.

Trunk

listVoIPTrunk

The “listVoIPTrunk” action will allow users to get information about the existing SIP trunk, such as the trunk’s name, its IP address etc.

Note

The needed information, can be defined in the parameter “**options**”. Otherwise all the information will be returned.

- Request

```
{
  "request":{
    "action":"listVoIPTrunk",
    "cookie":"sid719338887-1574671289",
    "options":"trunk_index,trunk_name,trunk_type"
  }
}
```

o Response

```
{
  "response":{
    "page":1,
    "total_item":3,
    "total_page":1,
    "voip_trunk":[
      {
        "trunk_index":2,
        "trunk_name":"test",
        "trunk_type":"peer"
      },
      {
        "trunk_index":3,
        "trunk_name":"test2",
        "trunk_type":"peer"
      },
      {
        "trunk_index":4,
        "trunk_name":"test12",
        "trunk_type":"peer"
      }
    ]
  },
  "status":0
}
```

Key Word	Value	Mandatory	Type	Note
Request Parameter				
cookie		yes	string	Returned value after login. All requests must include this value. If no cookie is included, error code -6 will be returned.
Page		no	int	Get extension list by page number.
item_num		no	int	Number of trunks to return for the request. If unspecified, all trunks will be returned.
Sord	acs,desc	no	string	Sorting method. acs stands for ascending, and desc stands for descending.
Sidx		no	string	Sort by trunk index. This is based on trunk creation date.
options	trunk_index, trunk_name, host, trunk_type, username, technology, ldap_sync_enable, trunks.out_of_service	no	string	Specify the information to return. Multiple options can be selected and must be separated by commas. If unspecified, all the listed information will be returned.
Successful response				

status	0	yes	int	Successful response, status is 0
voip_trunk		yes	Json array	VOIP trunk list
total_item		yes	int	Total number of items that were returned.
total_page		yes	int	Total number of pages in the list.
page		yes	int	What page is on.
trunk_index		no	string	Trunk ID
trunk_name		no	string	Trunk name
Host		no	string	Host
trunk_type	peer, register	no	string	Trunk type Peer trunk and register trunk
username		no	string	Username of register trunk. NULL for peer trunk.
Failed response				
status		yes	int	Please see the error code list for more details.

listVoIPTrunk

addSIPTrunk

The “addSIPTrunk” action will allow users to create SIP trunks.

Request

```
{
  "request":{
    "action":"addSIPTrunk",
    "cookie":"sid719338887-1574671289",
    "host":"192.168.5.222",
    "trunk_name":"GStest",
    "trunk_type":"peer"
  }
}
```

Response

```
{
  "response":{
    "need_apply":"yes"
  },
  "status":0
}
```

Key Word	Value	Mandatory	Type	Note
Request parameter				

cookie		yes	string	Returned value after login. All requests must include this value. If no cookie is included, error code -6 will be returned.
trunk_name		yes	string	Trunk name
Host		yes	string	Host
trunk_type	Peer, register	yes	string	Trunk type
Username	Up to 64 characters	yes	string	Configure the username to authenticate with the VoIP provider.
Secret				Configure the password to authenticate with the VoIP provider. Required for register trunks.
The rest options are Same as updateSIP Trunk				
Successful response				
Status	0	yes	int	The response is successful, status is 0
Failed response				
Status		yes	int	Please see the error code list for more details.

addSIPTrunk

getSIPTrunk

The “getSIPTrunk” will allow users to get information about a specific trunk.

◦ Request

```
{
  "request":{
    "action":"getSIPTrunk",
    "cookie":"sid23597213-1574672527",
    "trunk":"3"
  }
}
```

◦ Response


```

{
  "response":{
    "trunk":{
      "allow":"ulaw,alaw,gsm,g726,g729,ilbc",
      "allow_outgoing_calls_if_reg_failed":"yes",
      "auth_trunk":"no",
      "authid":null,
      "auto_recording":"no",
      "cc_agent_policy":"never",
      "cc_max_agents":5,
      "cc_max_monitors":5,
      "cc_monitor_policy":"never",
      "cidname":null,
      "cidnumber":null,
      "dialin_direct":"no",
      "did_mode":"request-line",
      "dtmfmode":null,
      "enable_qualify":"no",
      "encryption":"no",
      "fromdomain":null,
      "fromuser":null,
      "host":"1.2.55.4",
      "keepcid":"no",
      "keeporgcid":"no",
      "ldap_custom_prefix":null,
      "ldap_default_outrt":null,
      "ldap_default_outrt_prefix":null,
      "ldap_sync_enable":"no",
      "ldap_sync_passwd":null,
      "ldap_sync_port":null,
      "nat":"no",
      "need_register":"no",
      "out_maxchans":0,
      "out_of_service":"no",
      "outboundproxy":null,
      "pai_number":null,
      "passthrough_pai":"yes",
      "qualifyfreq":60,
      "rmv_obp_from_route":"no",
      "secret":null,
      "send_ppi":"no",
      "status":"Unmonitored",
      "tel_uri":"disabled",
      "transport":"udp",
      "trunk_index":3,
      "trunk_name":"test2",
      "trunk_type":"peer",
      "uri_sip_or_sips":0,
      "use_dod_as_from_name":"no",
      "use_dod_in_ppi":"no",
      "use_for_sfu_conf":"no",
      "use_origcid_in_ppi":"no",
      "username":null
    }
  },
  "status":0
}

```

Key Word	Value	Mand atory	Typ e	Note
Request Parameter				
cookie		yes	string	Returned value after login. All requests must include this value. If no cookie is included, error code -6 will be returned.
trunk		yes	string	Retrieves the configuration of the specified trunk. Please enter the trunk ID.
Successful response				

status	0	yes	int	The response is successful, status is 0.
trunk		yes	Json , obj	Specific Trunk configuration.
trunk_index		yes	string	Trunk id.
allow	ulaw,alaw,gsm,g726,g729,ilbc,g722,g726aal2,adpcm,g723,h263,h263p,h264,h265,vp8,opus,rtx.	no	string	The trunk's supported codecs
allow_outgoing_calls_if_reg_failed	yes, no	no	string	Whether outgoing calls are allowed the trunk is unable to register successfully.
auth_trunk	yes, no	no	string	Authenticate trunk. If enabled, UCM will respond to incoming calls with 401 message to authenticate the trunk.
authid		no	string	Authenticate ID This is the SIP service subscriber's ID used for authentication. If not configured, the Extension Number will be used for authentication.
auto_recording	no, yes	no	string	Auto record.
cc_agent_policy	native, never	no	string	To enable CC service Control together with cc_monitor_policy. CC service is enabled if both cc_agent_policy and cc_monitory_policy are native. It is disabled if both are set to never.
cc_max_agents		no	int	The maximum number of CCSS agents that may be allocated to this channel. In other words, this number is the maximum number of CC requests this channel is allowed to make.

cc_max_monitors		no	int	The maximum number of monitor structures which may be created for this device. In other words, this number tells how many callers may request CC services for a specific device at one time.
cc_monitor_policy	native, never	no	string	To enable CC service Control together with cc_agent_policy. CC service is enabled if both cc_agent_policy and cc_monitory_policy are native. It is disabled if both are set to never.
cidname		no	string	Caller ID Name CID name for this trunk that will be used if the caller does not have CID name configured.
cidnumber		no	string	Caller ID Number that the trunk will try to use when making outbound calls. CID priority from highest to lowest is as follows: From User (register trunk only) > Inbound Call CID (enable using remote CID) > Trunk CID/register trunk username (Keep Trunk CID enabled) > DOD CID(with correspond DOD configuration) > Extension CID > Register Trunk Username (for register trunk only, Keep Trunk CID disabled) > Global Outbound CID. Note: Certain providers may ignore this CID.
dialin_direct	no, yes	no	string	Direct callback Allows external numbers the option to get directed to the extension that last called them.
did_mode	request-line, to-header	no	string	Direct callback Allows external numbers the option to get directed to the extension that last called them.
dtmfmode	null, rfc2833, info, inband, auto	no	string	Configures the mode for sending DTMF. Null: Use global setting. RFC4733 (default): DTMF is transmitted as audio in the RTP stream but is encoded separately from the audio stream. Backward-compatible with RFC2833. Info: DTMF is transmitted through SIP signaling using info method. Inband: DTMF is transmitted as audio and is included in the audio stream. Auto: self-adjust

enable_quality	yes, no	no	string	Enable Heartbeat Detection yes: the PBX will regularly send SIP OPTIONS to check if the device is online.
encryption	no, yes, support	no	string	SRTP encryption mode Toggles support for RTP stream encryption.
fax_intelligent_route		no	string	<p>Enable fax intelligent routing. Set the destination to which the fax will be forwarded when a fax is detected. The following options are available:</p> <ul style="list-style-type: none"> • Extension: Sends a fax to the specified extension when a fax is detected. If FXS extension is selected here, the fax will be sent to the FXS extension. • Fax to E-mail: When the fax is detected, the fax will be sent as an attachment to the specified e-mail address. The e-mail address can be the extension's mailbox or self-identification. Define a mailbox. <p>Note: If you need to send a fax to your mailbox, make sure that the Mailbox in System is set up correctly.</p>
fax_intelligent_route_destination		no	string	Fax destination. The destination of fax intelligent routing can only be a fax extension or an fxs extension with a fax device.
faxdetect	yes, no	no	string	
Fromdomain		no	string	<p>From domain Configure the actual domain where the extension comes from. Can override From field. For example, "trunk.UCM6510.provider.com" is the domain name of the following From header field: sip:1234567@trunk.UCM6510.provider.com</p>
fromuser		no	string	<p>Configure the actual user Can override From header field. A single ID could register multiple DID. For example "1234567" is the username of the following From header field: sip:1234567@trunk.UCM6510.provider.com</p>
host		no	string	Enter the IP address or hostname of the VoIP provider's server.
keepcid	no, yes	no	string	<p>Keep Trunk CID yes: Trunk CID will not be overwritten by host CID. When set</p>

				to yes, cidnumber is mandatory.
keeporgcid	no, yes	no	string	Keep Original CID Keep CID from the inbound call when dialing out even if option "Keep Trunk CID" is enabled. Please make sure the peer PBX at the other end supports matching user entry using the "username" field from the authentication line.
ldap_custom_prefix		no	string	LDAP Dialed Prefix System will automatically modify the remote contacts by adding this prefix. When ldap_default_outrt is set to self-defined, use this prefix.
ldap_default_outrt		no	int	LDAP Outbound Rule Specify an outbound rule. The PBX system will automatically modify the remote contacts by adding prefix parsed from this rule. If null and ldap_default_outrt_prefix is configured, use custom outbound prefix. If null, no outbound prefix is added by default.
ldap_sync_enable	no, yes	no	string	Sync LDAP Enable Provide and update the local LDAP contact to a remote peer automatically (SIP peer trunk only). To ensure successful synchronization, the remote peer needs to enable this service and set the same password as the local UCM.
ldap_sync_passwd		no	string	Sync LDAP Password This is the password used for LDAP contact file encryption and decryption. The password must be the same for both peers to ensure successful synchronization.
ldap_sync_port		no	int	Sync LDAP Port The TCP port used by this service.
nat	no, yes	no	string	Enable this setting if the UCM is using public IP and communicating with devices behind NAT. Note 1: This setting will overwrite the Contact header of received messages, which may affect the ability to establish calls when behind NAT. Consider changing settings in PBX Settings->SIP Settings->NAT instead. If one is experiencing one-way audio issues, please check the NAT configuration and SIP/RTP ports in the firewall.
need_register	no, yes	no	string	Whether to register on the external server.

out_maxchans		no	int	The number of current outgoing calls over the trunk at the same time. The default value 0 means no limit.
out_of_service		no	int	The number of current outgoing calls over the trunk at the same time. The default value 0 means no limit.
outboundproxy		no	string	Outbound proxy When configured, the outbound signal will be sent to the proxy instead of the devices directly. The outbound proxy can be domain name or IP address.
pai_number		no	string	PAI Header PAI header for the trunk formatted as "name<number>", "<number>", or "number". If not configured, CID will be used instead.
passthrough_pai	yes, no	no	string	Passthrough PAI Header If enabled and "Send PAI Header" is disabled, PAI headers will be preserved as calls pass through the UCM.
qualifyfreq		no	int	Configure the frequency (in seconds) to send SIP OPTIONS messages to check the status of the device. Default is 60.
rmv_obp_from_route	no, yes	no	string	Remove OBP from Route If enabled, the outbound proxy URI in the Route header will be removed from SIP requests. Default setting is "No".
secret		no	string	Password of register trunk
send_ppi	yes, no	no	string	Send PPI Header Yes: the invite message sent to trunks will contain PPI (P-Preferred-Identity) Header.
status	Unknown, Unmonitored, Reachable, Unreachable, Registered, Unregistered, Lagged, , Failed, Request	no	string	

	t Sent, Rejecte d, Timeou t, No Authen tication			
tel_uri	disable d, user_p hone, enabled	no	string	<p>TEL URI</p> <p>Enabled: TEL URI and Remove OBP from Route cannot be enabled at the same time. If set to "Enable", "Tel:" will be used instead of "SIP:" in the SIP request.</p> <p>User_phone: If the phone has an assigned PSTN telephone number, this field should be set. A "User=Phone" parameter will then be attached to the Request-Line and "TO" header in the SIP request to indicate the E.164 number.</p>
transport	udp, tcp, tls	no	string	Configure the SIP Transport method. Using TCP requires local TCP support; using TLS requires local TLS support.
trunk_index		no	string	Trunk ID
trunk_name		no	string	<p>Provider name</p> <p>Configure a unique label to identify the trunk when listed in outbound rules and incoming rules.</p>
trunk_type	peer, register	no	string	<p>Trunk type</p> <p>Peer trunk or register trunk</p>
use_dod_in_ppi	no, yes	no	string	<p>Displays whether the DOD is being used for the PPI header.</p> <p>If both use_dod_in_pi and use_origcid_in_ppi are set to "no", CID will be used for the PPI header.</p>
use_origcid_in_ppi	yes, no	no	string	<p>Displays whether or not the original CID is used for the PPI header.</p> <p>If both use_dod_in_pi and use_origcid_in_ppi are set to "no", CID will be used for the PPI header.</p>
username		no	string	Configure the username to authenticate with the VoIP provider.
use_for_sf_u_conf	yes, no	no	string	<p>IPVT Mode</p> <p>Enabling this will allow UCM to establish communication with IPVT.</p>
Failed response				
status		yes	string	Please see the error code list for more details.

updateSIPTrunk

The “updateSIPTrunk” action will allow users to update existing SIP trunk while specifying the trunk’s number.

◦ Request

```
{
  "request":{
    "action":"updateSIPTrunk",
    "cookie":"sid23597213-1574672527",
    "trunk":"5",
    "trunk_name":"GS1"
  }
}
```

◦ Response

```
{
  "response":{
    "need_apply":"yes"
  },
  "status":0
}
```

Key Word	Value	Mandatory	Type	Note
Request parameter				
cookie		yes	string	Cookie: Returned value after login. All requests must include this value. If no cookie is included, error code -6 will be returned.
trunk		yes	string	Trunk id, specify which trunk to edit.
allow	ulaw, alaw, gsm, g726, g729, ilbc, g722, g726aal2, adpcm, g723, h263, h263p, h264, h265, vp8, opus, rtx, mandatory	no	string	Supported codec, multiple can be set.
allow_outgoing_calls_if_reg_failed	yes, no	no	string	Whether outgoing calls are allowed when registration failed

				no: Calls are not allowed when the registration fails. If no outgoing registration is set, this configuration item can be ignored.
auth_trunk	yes, no	no	string	Authenticate trunk yes: the UCM will send a 401 response to the incoming call to authenticate the trunk.
authid	Up to 64 characters	no	string	Authenticate ID This is the SIP service subscriber's ID used for authentication. If not configured, the Extension Number will be used for authentication.
auto_recording	no, yes	no	string	Auto record.
cc_agent_policy	native, never	no	string	To enable CC service Control together with cc_monitor_policy. When cc_agent_policy and cc_monitor_policy are native at the same time, service is enables. When both are never, service is disabled.
cc_max_agents	1-999	no	int	The maximum number of CCSS agents that may be allocated to this channel. In other words, this number is the maximum number of CC requests this channel is allowed to make.
cc_max_monitors	1-999	no	int	The maximum number of monitor structures which may be created for this device. In other words, this number tells how many callers may request CC services for a specific device at one time.
cc_monitor_policy	native, never	no	string	To enable CC service Control together with cc_agent_policy. When cc_agent_policy and cc_monitor_policy are native at the same time, service is enables. When both are never, service is disabled.

cidname	2-64 character s	no	string	<p>Caller ID Name</p> <p>Configure the new name of the caller when the extension has no CallerID Name configured.</p>
cidnumber	2-64 character s	no	string	<p>Caller ID</p> <p>Number that the trunk will try to use when making outbound calls. CID priority from highest to lowest is as follows:</p> <p>From User (register trunk only) > Inbound Call CID (enable using remote CID) > Trunk CID/register trunk username (Keep Trunk CID enabled) > DOD CID(with correspond DOD configuration) > Extension CID > Register Trunk Username (for register trunk only, Keep Trunk CID disabled) > Global Outbound CID.</p> <p>Note: Certain providers may ignore this CID.</p>
dialin_direct	no, yes	no	string	<p>Direct callback</p> <p>Allows external numbers the option to get directed to the extension that last called them.</p>
did_mode	request- line, to- header	no	string	<p>DID Mode</p> <p>Configure to obtain the destination ID of an incoming SIP call from SIP Request-line or To header.</p>
dtmfmode	Null, rfc4733, info, inband, auto	no	string	<p>Configures the mode for sending DTMF.</p> <p>Null: Use global setting. RFC4733 (default): DTMF is transmitted as audio in the RTP stream but is encoded separately from the audio stream. Backward-compatible with RFC2833.</p> <p>Info: DTMF is transmitted through SIP signaling using info method.</p> <p>Inband: DTMF is transmitted as audio and is included in the audio stream.</p> <p>Auto: self-adjust</p>

enable_qualify	yes, no	no	string	<p>Enable Heartbeat Detection</p> <p>yes: the PBX will regularly send SIP OPTIONS to check if the device is online.</p>
encryption	no, yes, support	no	string	<p>SRTP encryption mode</p> <p>Set whether to turn on SRTP mode to encrypt RTP streams.</p>
fax_intelligent_route		no	string	<p>Enable fax intelligent routing. Set the destination to which the fax will be forwarded when a fax is detected. The following options are available:</p> <ul style="list-style-type: none"> ● Extension: Sends a fax to the specified extension when a fax is detected. If FXS extension is selected here, the fax will be sent to the FXS extension. ● Fax to E-mail: When the fax is detected, the fax will be sent as an attachment to the specified e-mail address. The e-mail address can be the extension's mailbox or self-identification. Define a mailbox. Note: If you need to send a fax to your mailbox, make sure that the Mailbox in System is set up correctly.
fax_intelligent_route_destination		no	string	<p>Fax destination. The destination of fax intelligent routing can only be a fax extension or an fxs extension with a fax device.</p>
fromdomain	Up to 60 characters	no	string	<p>From domain</p> <p>Configure the actual domain where the extension comes from. Can override From field. For example, "trunk.UCM6510.provider.com" is the domain name of the following From header field.</p> <p>sip:1234567@trunk.UCM6510.provider.com</p>

fromuser	Up to 64 characters	no	string	Configure the actual user, Can override From header field. A single ID could register multiple DID. For example “1234567” is the username of the following From header field: sip:1234567@trunk.UCM6510.provider.com
host	Required. Up to 60 characters.	no	string	Enter the IP address or hostname of the VoIP provider’s server.
keepcid	no, yes	no	string	Keep Trunk CID yes: Trunk CID will not be overwritten by host CID. When set to yes, cidnumber is mandatory.
keeporgcid	no, yes	no	string	Keep Original CID Keep CID from the inbound call when dialing out even if option “Keep Trunk CID” is enabled. Please make sure the peer PBX at the other end supports matching user entry using the “username” field from the authentication line.
ldap_custom_prefix	1-14 characters	no	string	LDAP Dialed Prefix System will automatically modify the remote contacts by adding this prefix. When ldap_default_outrt is set to self-defined, use this prefix.
ldap_default_outrt	The existing outgoing route id	no	int	LDAP Outbound Rule Specify an outbound rule. The PBX system will automatically modify the remote contacts by adding prefix parsed from this rule. If null and ldap_default_outrt_prefix is configured, use custom outbound prefix. If null, no outbound prefix is added by default.
ldap_sync_enable	no, yes	no	string	Sync LDAP Enable Provide and update the local LDAP contact to a remote peer

				<p>automatically (SIP peer trunk only). To ensure successful synchronization, the remote peer needs to enable this service and set the same password as the local UCM.</p>
ldap_sync_passwd	4-64 alphanumeric characters and underscore (_) only.	no	string	<p>Sync LDAP Password</p> <p>This is the password used for LDAP contact file encryption and decryption. The password must be the same for both peers to ensure successful synchronization.</p>
ldap_sync_port	Value between 1-65534	no	int	<p>Sync LDAP Port</p> <p>The TCP port used by this service.</p>
nat	no, yes	no	string	<p>Enable this setting if the UCM is using public IP and communicating with devices behind NAT. Note 1: This setting will overwrite the Contact header of received messages, which may affect the ability to establish calls when behind NAT. Consider changing settings in PBX Settings->SIP Settings->NAT instead.</p> <p>If one is experiencing one-way audio issues, please check the NAT configuration and SIP/RTP ports in the firewall.</p> <p>This configuration needs to be confirmed under real situation because it will change the Contact header field of incoming message in tun affects the establishing of calls. Under NAT environment, it requires configuring on NAT interface of SIP settings.</p>
need_register	no, yes	no	string	<p>Whether to register on the external server.</p>
out_maxchans	Value between 0-999	no	int	<p>The number of current outgoing calls over the trunk at the same time. The default value 0 means no limit.</p>

out_of_service	no, yes	no	string	Whether to disable the trunk.
outboundproxy	Domain name or IP address	no	string	Outbound proxy When configured, the outbound signal will be sent to the proxy instead of the devices directly. The outbound proxy can be domain name or IP address.
pai_number	Up to 60 characters	no	string	PAI Header The user and name of the PAI header, it is formatted as “name<number>” or “<number>” or “number”. If null, use the CID according to the priority.
passthrough_pai	yes, no	no	string	Passthrough PAI Header If enabled and “Send PAI Header” is disabled, PAI headers will be preserved as calls pass through the UCM.
qualifyfreq	Value between 1-3600	no	int	Configure the frequency (in seconds) to send SIP OPTIONS messages to check the status of the device. Default is 60.
rmv_obp_from_route	no, yes	no	string	Remove OBP from Route It is used for removing the URI of outbound proxy from Route header field of phone system. If enabled, Route header will be removed from SIP requests. The default setting is “No”.
secret	Up to 64 characters	no	string	Password of register trunk
send_ppi	no, yes	no	string	Send PPI Header Yes: the invite message sent to trunks will contain PPI (P-Preferred-Identity) Header.

tel_uri	disabled, user_phone, enabled	no	string	<p>TEL URI</p> <p>Enabled: TEL URI and Remove OBP from Route cannot be enabled at the same time. If set to “Enable”, “Tel:” will be used instead of “SIP:” in the SIP request.</p> <p>User_phone: If the phone has an assigned PSTN telephone number, this field should be set. A “User=Phone” parameter will then be attached to the Request-Line and “TO” header in the SIP request to indicate the E.164 number.</p>
transport	udp, tcp, tls	no	string	<p>Configure the SIP Transport method. Using TCP requires local TCP support; using TLS requires local TLS support.</p>
trunk_name	2-64 characters	no	string	<p>Trunk id</p>
use_dod_in_ppi	no, yes	no	string	<p>Configure how to set the PPI number.</p> <p>When use_dod_in_ppi and use_origcid_in_ppi are both no, set the ppi number by CID option priority.</p> <p>When use_origcid_in_ppi is yes, use the original CID in the PPI header, if no original CID, use the default number. When use_dod_in_ppi is yes, use the DOD number in the PPI header, if no DOD number, use the default number.</p>
use_origcid_in_ppi	no, yes	no	string	<p>Configure how to set the PPI number.</p> <p>When use_dod_in_ppi and use_origcid_in_ppi are both no, set the ppi number by CID option priority.</p> <p>When use_origcid_in_ppi is yes, use the original CID in the PPI header, if no original CID, use the default number. When use_dod_in_ppi is yes, use the DOD number in the PPI header, if no</p>

				DOD number, use the default number.
username	Up to 64 characters	no	string	Configure the username to authenticate with the VoIP provider.
use_for_sfu_conf	yes, no	no	string	IPVT Mode Configures the UCM to be used exclusively for IPVT. Warning: This will lock out certain UCM features.
Successful response				
status	0	yes	int	Successful response, the status is 0.
Failed response				
status		yes	int	Please see the error code list for more details.

updateSIPTrunk

deleteSIPTrunk

The “deleteSIPTrunk” action, allows users to delete an existing trunk.

Request

```
{
  "request":{
    "action":"deleteSIPTrunk",
    "cookie":"sid23597213-1574672527",
    "trunk":"5"
  }
}
```

Response

```
{
  "response":{
    "need_apply":"yes"
  },
  "status":0
}
```

Key Word	Value	Mandatory	Type	Note
Request parameter				
Cookie		yes	string	Returned value after login. All requests must include this value. If no cookie is included, error code -6 will be returned.

Trunk		yes	string	Enter the trunk ID to specify the trunk to delete.
Successful response				
Status	0	yes	int	The response is successful, status is 0
Failed response				
Status		yes	int	Please see the error code list for more details.

deleteSIPTrunk

listAnalogTrunk

The “listAnalogTrunk” action will allow users to get information about the existing analog trunks, such as the trunk’s name, trunk index etc.

Note: The needed information, can be defined in the parameter “**options**”. Otherwise, all the information will be returned.

o **Request**

```
{
  "request":{
    "action":"listAnalogTrunk",
    "cookie":"sid1838731674-1582859646",

    "options":"trunk_name,trunk_index,chans,out_of_service,trunkmode"
  }
}
```

o **Response**

```
{
  "response":{
    "analogtrunk":[
      {
        "chans":"1",
        "out_of_service":"no",
        "trunk_index":7,
        "trunk_name":"123",
        "trunkmode":"normal"
      }
    ],
    "page":1,
    "total_item":1,
    "total_page":1
  },
  "status":0
}
```

Key Word	Value	Mandatory	Type	Note
Request Parameter				

Cookie		yes	string	Returned value after login. All requests must include this value. If no cookie is included, error code -6 will be returned.
Page		no	int	Get extension list by page number.
item_number		no	int	Number of trunks to return for the request. If unspecified, all trunks will be returned.
Sord	acs,desc	no	string	Sorting method. acs stands for ascending, and desc stands for descending.
Sidx		no	string	Sort by trunk index. This is based on trunk creation date.
options	trunk_name, trunk_index, chans, out_of_service, trunkmode	no	string	
Successful response				
Status	0	yes	int	Successful response, status is 0
analogtrunk		yes	Json array	Analog trunk list
total_item		yes	int	Total number of items that were returned.
total_page		yes	int	Total number of pages in the list.
Page		yes	int	What page is on.
trunk_index		no	string	Trunk ID
trunk_name		no	string	Trunk name
out_of_service		no	string	Either the trunk is disabled or not
Chans		no	string	Used ports
trunkmode		no	string	Trunk mode
Failed response				

status		yes	int	Please see the error code list for more details.
--------	--	-----	-----	--

listAnalogTrunk

addAnalogTrunk

The “addAnalogTrunk” action will allow users to create Analog trunks.

Request

```
{
  "request":{
    "chans": 2,
    "trunkgroup": "",
    "action": "addAnalogTrunk",
    "cookie": "sid65643067-1582875896"
    "trunk_name": "1232",
    "trunkmode": "normal",
    "polarityswitch": "no",
    "enablecurrentdisconnectthreshold": "yes",
    "currentdisconnectthreshold": 200,
    "ringtimeout": 8000,
    "rxgain": 0,
    "txgain": 0,
    "usecallerid": "yes",
    "cidmode": 0,
    "fxooutbandcalldialdelay": 0,
    "auto_record": "no",
    "out_of_service": "no",
    "dahdilineselectmode": "ascend",
    "lectype": 0,
    "busydetect": "yes",
    "busycount": 2,
    "congestiondetect": "yes",
    "congestioncount": 2,
    "countrytone": "us",
    "busy": "f1=480@-50,f2=620@-50,c=500/500",
    "congestion": "f1=480@-50,f2=620@-50,c=250/250",
    "dialin_direct": "no",
    "cidstart": "ring",
    "cidsignalling": "bell",
    "faxdetect": "incoming",
    "fax_gateway": "no"
  }
}
```

Response

```
{
  "response":{
    "need_apply": "yes"
  },
  "status": 0
}
```

Key Word	Value	Mandatory	Type	Note
Request parameter				
Cookie		yes	string	Returned value after login. All requests must include this value. If no cookie is included, error code -6 will be returned.

trunk_name		yes	string	Trunk name
Auto_record	Yes, no	no	string	Whether to enable automatic recording
Busy		no	string	Busy tone settings
Busydetect	Yes, no	no	string	Whether to enable busy tone detection
busycount		no	int	The number of busy tones the user will hear before hanging up the call when Busy Detection is enabled.
Chans		yes	int	Used ports
Congestion		no	string	Congestion tone settings
Congestioncount		no	int	The number of congestion tones to wait for when Congestion Detection is enabled.
Congestiondetect	Yes, no	no	string	Congestion Detection is used for detecting far end congestion signal.
Countrytone		no	string	Country for tone settings. You can also select Custom and set the values manually.
Currentdisconnectthreshold	50-3000	no	int	Current hang-up threshold (ms)
Dahdilineselectmode		no	string	Outgoing line selection
dialin_direct	Yes, no	no	string	Direct callback
Enablecurrentdisconnectthreshold		no	string	Whether to enable the current hang-up threshold
Fxooutbandcalldialdelay	0-3000	no	int	FXO dial delay
Fax_gateway	Yes, no	no	string	Either the FXO mode is set to fax gateway or not
Lectype		no	int	Echo cancellation mode

out_maxcalls		no	int	Maximum number of calls
out_of_service	Yes, no	no	string	Either the trunk is disabled or not
Polarityonanswerdelay	100 – 2000	no	int	Polarity reversal response delay
Polarityswitch	Yes, no	no	string	Detect polarity reversal
ringtimeout	4000 – 20000	no	int	ringtimeout
Rxgain	-13 – +12	no	real	RX gain
trunkmode	Normal, SLA	no	string	Trunk mode
Txgain	-13 – +12	no	real	TX gain
Usecallerid	Yes, no	no	string	Whether to enable use callerID option or not
Trunkgroup		yes	string	The default is 0 when adding. The value is the same as trunk index
Cidsignaling		no	string	CallerID scheme
Cidmode		no	int	Caller number combination
Successful response				
Status	0	yes	int	The response is successful, status is 0
Failed response				
Status		yes	int	Please see the error code list for more details.

listAnalogTrunk

getAnalogTrunk

The “getAnalogTrunk” will allow users to get information about a specific trunk.

◦ Request

```
{
  "request":{
    "action":"getAnalogTrunk",
    "cookie":"sid23597213-1574672527",
    "analogtrunk":"3"
  }
}
```

o Response

```
{
  "response":{
    "analogtrunk":{
      "auto_record":"no",
      "busy":"f1=480@-50,f2=620@-50,c=500/500",
      "busycount":2,
      "busydetect":"yes",
      "callerid":"asreceived",
      "chans":"1",
      "cidmode":0,
      "cidsignalling":"bell",
      "cidstart":"ring",
      "congestion":"f1=480@-50,f2=620@-50,c=250/250",
      "congestioncount":2,
      "congestiondetect":"yes",
      "countrytone":"us",
      "currentdisconnectthreshold":200,
      "dahdilineselectmode":"ascend",
      "dialin_direct":"no",
      "echocancel":128,
      "enablecurrentdisconnectthreshold":"yes",
      "fax_gateway":"no",
      "fax_intelligent_route":"no",
      "fax_intelligent_route_destination":null,
      "faxdetect":"incoming",
      "fxooutbandcalldialdelay":0,
      "lectype":0,
      "out_maxchans":0,
      "out_of_service":"no",
      "polarityonanswerdelay":600,
      "polarityswitch":"no",
      "ringtimeout":8000,
      "rxgain":0.0,
      "tmp":7,
      "trunk_index":7,
      "trunk_name":"123",
      "trunkgroup":7,
      "trunkmode":"normal",
      "txgain":0.0,
      "usecallerid":"yes"
    }
  },
  "status":0
}
```

Key Word	Value	Mandatory	Type	Note
Request parameter				
Cookie		Yes	string	Returned value after login. All requests must include this value. If no cookie is included, error code -6 will be returned.
analogtrunk		yes	int	Trunk id
Successful response				

trunk_name		Yes	string	Trunk name
Auto_record	Yes, no	No	string	Whether to enable automatic recording
Busy		No	string	Busy tone settings
Busydetect	Yes, no	No	string	Whether to enable busy tone detection
busycount		No	int	The number of busy tones the user will hear before hanging up the call when Busy Detection is enabled.
Chans		yes	int	Used ports
Congestion		No	string	Congestion tone settings
Congestioncount		No	int	The number of congestion tones to wait for when Congestion Detection is enabled.
Congestiondetect	Yes, no	No	string	Congestion Detection is used for detecting far end congestion signal.
Countrytone		No	string	Country for tone settings. You can also select Custom and set the values manually.
Currentdisconnectthreshold	50-3000	No	int	Current hang-up threshold (ms)
Dahdlineselectmode		No	string	Outgoing line selection
dialin_direct	Yes, no	No	string	Direct callback
Enablecurrentdisconnectthreshold		No	string	Whether to enable the current hang-up threshold
Fxooutbandcalldialdelay	0-3000	No	int	FXO dial delay
Fax_gateway	Yes, no	No	string	Either the FXO mode is set to fax gateway or not
Lectype		No	int	Echo cancellation mode

out_maxchans		No	int	Maximum number of calls
out_of_service	Yes, no	No	string	Either the trunk is disabled or not
Polarityonanswerdelay	100 – 2000	No	int	Polarity reversal response delay
Polarityswitch	Yes, no	No	string	Detect polarity reversal
ringtimeout	4000 – 20000	No	int	Ringtimeout
Rxgain	-13 – +12	No	real	RX gain
Trunkmode	Normal, SLA	No	string	Trunk mode
Txgain	-13 – +12	No	real	TX gain
Usecallerid	Yes, no	No	string	Whether to enable use callerID option or not
Trunkgroup		yes	string	The default is 0 when adding. The value is the same as trunk index
Cidsignaling		No	string	CallerID scheme
Cidmode		No	int	Caller number combination
Status	0	Yes	int	The response is successful, status is 0
Failed response				
Status		Yes	int	Please see the error code list for more details.

getAnalogTrunk

updateAnalogTrunk

The “updateAnalogTrunk” action will allow users to update the existing Analog trunk while specifying the trunk group.

◦ Request


```

{
  "request":{
    "trunkmode": "normal",
    "polarityswitch": "no",
    "enablecurrentdisconnectthreshold":"yes",
    "currentdisconnectthreshold": 200,
    "ringtimeout": 8000,
    "rxgain": 0,
    "txgain": 0,
    "usecallerid": "yes",
    "cidmode": 0,
    "fxooutbandcalldialdelay": 0,
    "auto_record": "no",
    "out_of_service": "no",
    "dahdilineselectmode": "ascend",
    "lectype": 0,
    "busydetect": "yes",
    "busycount": 2,
    "congestiondetect": "yes",
    "congestioncount": 2,
    "countrytone": "us",
    "busy": "f1=480@-50,f2=620@-50,c=500/500",
    "congestion":
"f1=480@-50,f2=620@-50,c=250/250",
    "dialin_direct": "no",
    "cidstart": "ring",
    "cidsignalling": "bell",
    "faxdetect": "incoming",
    "fax_gateway": "no",
    "chans": 2,
    "trunkgroup":7,
    "action": "updateAnalogTrunk",
    "cookie":"sid65643067-1582875896"

  }
}

```

o Response

```

{
  "response":{
    "need_apply":"yes"
  },
  "status":0
}

```

Key Word	Value	Mandato ry	Type	Note
Request parameter				
Cookie		Yes	string	Returned value after login. All requests must include this value. If no cookie is included, error code -6 will be returned.
Trunk_index		Yes	string	Trunk index
Other parameters are the same as addAnalogTrunk action				
Successful response				

Status	0	Yes	int	The response is successful, status is 0
Failed response				
Status		Yes	int	Please see the error code list for more details.

updateAnalogTrunk

deleteAnalogTrunk

The “deleteAnalogTrunk” action, allows users to delete an existing trunk.

o **Request**

```
{
  "request":{
    "action":"deleteAnalogTrunk",
    "analogtrunk":7,
    "cookie":"sid1449753552-1582877632"
  }
}
```

o **Response**

```
{
  "response":{
    "need_apply":"yes"
  },
  "status":0
}
```

Key Word	Value	Mandatory	Type	Note
Request parameter				
Cookie		Yes	string	Returned value after login. All requests must include this value. If no cookie is included, error code -6 will be returned.
analogtrunk		Yes	int	Enter the trunk ID to specify the trunk to delete.
Successful response				
status	0	yes	int	The response is successful, status is 0
Failed response				

Status		yes	int	Please see the error code list for more details.
--------	--	-----	-----	--

deleteAnalogTrunk

addSLATrunk

The action “addSLATrunk” allows user to enable SLA on an existing analog trunk.

Request

```
{
  "request":{
    "action":"addSLATrunk",
    "bargeallowed":"yes",
    "cookie":"sid1344581054-1582879094",
    "device":"DAHDI/1",
    "holdaccess":"open",
    "trunk_name":"1232"
  }
}
```

Response

```
{
  "response":{
    "need_apply":"yes"
  },
  "status":0
}
```

Key Word	Value	Mandato ry	Type	Note
Request parameter				
Cookie		Yes	string	Returned value after login. All requests must include this value. If no cookie is included, error code -6 will be returned.
Trunk_name		yes	string	Trunk name
Device		no	string	Device port id (DAHDI / 1)
Bargeallowed	Yes, no	no	string	Whether to allow barge or not.
Holdaccess	Open, private	no	string	
Successful response				
Status	0	Yes	Int	The response is successful, status is 0
Failed response				

Status		Yes	int	Please see the error code list for more details.
--------	--	-----	-----	--

addSLATrunk

updateSLATrunk

The “updateSLATrunk” action allows user to update an existing SLA analog trunk.

Request

```
{
  "request":{
    "action":"updateSLATrunk",
    "bargeallowed":"yes",
    "cookie":"sid1344581054-1582879094",
    "device":"DAHDI/1",
    "holdaccess":"open",
    "trunk_index":7,
    "trunk_name":"43243"
  }
}
```

Response

```
{
  "response":{
    "need_apply":"yes"
  },
  "status":0
}
```

Key Word	Value	Mandatory	Type	Note
Request parameter				
Cookie		Yes	string	Returned value after login. All requests must include this value. If no cookie is included, error code -6 will be returned.
Trunk_index		yes	string	Trunk index
Other parameters are the same as addSLATrunk action				
Successful response				
Status	0	Yes	int	The response is successful, status is 0
Failed response				
Status		Yes	int	Please see the error code list for more details.

updateSLATrunk

listDigitalTrunk

The “listDigitalTrunk” action will allow users to get information about the existing Digital trunks, such as the trunk’s name, trunk index etc.

Note: The needed information, can be defined in the parameter “**options**”. Otherwise, all the information will be returned.

Request

```
{
  "request":{
    "action":"listDigitalTrunk",

    "options":"trunk_name,type,trunk_index,span,channel,out_of_servi
    "cookie":"sid1271797830-1582880510"
  }
}
```

Response

```
{
  "response":{
    "digital_trunks":[
      {
        "channel":"1-15,17-31",
        "out_of_service":"no",
        "span":3,
        "trunk_index":"1",
        "trunk_name":"4324",
        "type":"E1 (CPE)"
      }
    ],
    "page":1,
    "total_item":1,
    "total_page":1
  },
  "status":0
}
```

Key Word	Value	Mandato ry	Type	Note
Request Parameter				
cookie		Yes	string	Returned value after login. All requests must include this value. If no cookie is included, error code -6 will be returned.
Page		No	int	Get extension list by page number.
item_num		No	int	Number of trunks to return for the request. If unspecified, all trunks will be returned.

sord	acs,desc	No	string	Sorting method. acs stands for ascending, and desc stands for descending.
sidx		No	string	Sort by trunk index. This is based on trunk creation date.
options	trunk_name, type, trunk_index, span, channel, out_of_service	no	string	Specify the information to return. Multiple options can be selected and must be separated by commas. If unspecified, all the listed information will be returned.
Successful response				
status	0	yes	Int	Successful response, status is 0
Digital_trunk		yes	Json array	Digital trunk list
total_item		yes	Int	Total number of items that were returned.
total_page		yes	Int	Total number of pages in the list.
page		yes	Int	What page is on.
trunk_index		No	string	Trunk ID
trunk_name		No	string	Trunk name
out_of_service		No	string	Either the trunk is disabled or not
Span		No	string	Used ports
Type		No	string	Pattern type
Channel		No	string	Signaling channel
Failed response				
status		Yes	int	Please see the error code list for more details.

ListDigitalTrunk

addDigitalTrunk

The “addDigitalTrunk” action will allow users to create Digital trunks.

Request

```
{
  "request":{
    "action":"addDigitalTrunk",
    "auto_recording":"yes",
    "callerid":"543543",
    "cidname":"32432",
    "cookie":"sid2074121023-1582881736",
    "dahdilineselectmode":"poll",
    "dialin_direct":"yes",
    "group_index":1,
    "hidecallerid":"yes",
    "keepcid":"yes",
    "technology":"PRI",
    "trunk_name":"4324"
  }
}
```

Response

```
{
  "response":{
    "need_apply":"yes"
  },
  "status":0
}
```

Key Word	Value	Mandatory	Type	Note
Request parameter				
Cookie		yes	string	Returned value after login. All requests must include this value. If no cookie is included, error code -6 will be returned.
trunk_name		Yes	string	Trunk name
group_index	Yes, no	yes	int	Channel group
Hidecallerid		no	string	Hide caller ID
Keepcid	Yes, no	no	string	
Callerid		no	string	Caller ID
Cidname		no	string	Caller ID name
Auto_recording	Yes, no	no	string	Either to enable auto recording or not.

Dahdilineselectionmode	ascend, poll, descend	no	string	Outbound route selection
dialin_direct	Yes, no	no	string	Callback
Technology	PRI, SS7, MFC/R2, EM, EM_W	no	string	Signaling protocol
Successful response				
Status	0	yes	int	The response is successful, status is 0
Failed response				
Status		yes	int	Please see the error code list for more details.

addDigitalTrunk

getDigitalTrunk

The “getDigitalTrunk” will allow users to get information about a specific Digital trunk.

◦ Request

```
{
  "request":{
    "action":"getDigitalTrunk",
    "cookie":"sid1105656270-1582883162",
    "trunk":1
  }
}
```

◦ Response


```

{
  "response":{
    "trunk":{
      "auto_recording":"no",
      "callerid":null,
      "cidname":null,
      "dahdilineselectmode":"ascend",
      "dialin_direct":"no",
      "fax_intelligent_route":"no",
      "fax_intelligent_route_destination":null,
      "faxdetect":"yes",
      "group_index":1,
      "hidecallerid":"no",
      "keepcid":"no",
      "out_of_service":"no",
      "pulsedial":"no",
      "status":"Unavailable",
      "trunk_index":1,
      "trunk_name":"324"
    }
  },
  "status":0
}

```

Key Word	Value	Manda tory	Typ e	Note
Request parameter				
Cookie		yes	string	Returned value after login. All requests must include this value. If no cookie is included, error code -6 will be returned.
Trunk		yes	int	Trunk id
Request parameter				
trunk_name		Yes	string	Trunk name
Status	0	yes	int	
Trunk_name		yes	string	Trunk name
Trunk		yes	int	Trunk id
group_index	Yes, no	yes	int	Channel group
Hidecallerid		no	string	Hide caller ID
Keepcid	Yes, no	no	string	
Callerid		no	string	Caller ID
Cidname		no	string	Caller ID name

Auto_recording	Yes, no	no	string	Either to enable auto recording or not.
Dahdilineselectmode	ascend, poll, descend	no	string	Outbound route selection
dialin_direct	Yes, no	no	string	Callback
Status		no	string	Trunk status
Out_of_service		no	string	Whether the trunk is disabled or not
Failed response				
Status		yes	int	Please see the error code list for more details.

getDigitalTrunk

updateDigitalTrunk

The “updateDigitalTrunk” action will allow users to update the existing Digital trunk while specifying the trunk ID.

Request

```
{
  "request":{
    "action":"updateDigitalTrunk",
    "auto_recording":"yes",
    "callerid":"543543",
    "cidname":"32432",
    "cookie":"sid1105656270-1582883162",
    "dahdilineselectmode":"poll",
    "dialin_direct":"yes",
    "group_index":1,
    "hidecallerid":"yes",
    "keepcid":"yes",
    "trunk":1,
    "trunk_name":"4324"
  }
}
```

Response

```
{
  "response":{
    "need_apply":"yes"
  },
  "status":0
}
```

Key Word	Value	Mandatory	Type	Note
Request parameter				
Cookie		yes	String	Returned value after login. All requests must include this value. If no cookie is included, error code -6 will be returned.
trunk_name		Yes	String	Trunk name
Trunk		yes	Int	Trunk id
group_index	Yes, no	yes	int	Channel group
Hidecallerid		no	string	Hide caller ID
Keepcid	Yes, no	no	string	
Callerid		no	string	Caller ID
Cidname		no	string	Caller ID name
Auto_recording	Yes, no	no	string	Either to enable auto recording or not.
Dahdilineselectmode	ascend, poll, descend	no	string	Outbound route selection
dialin_direct	Yes, no	no	string	Callback
Successful response				
Status	0	yes	int	The response is successful, status is 0
Failed response				
Status		yes	int	Please see the error code list for more details.

UpdateDigitalTrunk

deleteDigitalTrunk

The “deleteDigitalTrunk” action, allows users to delete an existing Digital trunk.

Request

```
{
  "request":{
    "action":"deleteDigitalTrunk",
    "trunk":7,
    "cookie":"sid1449753552-1582877632"
  }
}
```

◦ Response

```
{
  "response":{
    "need_apply":"yes"
  },
  "status":0
}
```

Key Word	Value	Mandatory	Type	Note
Request parameter				
Cookie		Yes	string	Returned value after login. All requests must include this value. If no cookie is included, error code -6 will be returned.
Trunk		Yes	int	Enter the trunk ID to specify the trunk to delete.
Successful response				
Status	0	Yes	int	The response is successful, status is 0
Failed response				
Status		Yes	int	Please see the error code list for more details.

deleteDigitalTrunk

Outbound Route

listOutboundRoute

The “listOutboundRoute” allows users to list the existing outbound route such as the route’s name, its permission, etc.

Note: The needed information, can be defined in the parameter “**options**”.

◦ Request

```
{
  "request":{
    "action":"listOutboundRoute",
    "cookie":"sid23597213-1574672527",

    "options":"outbound_rt_name,outbound_rt_index,permission,sequenc
  }
}
```



◦ Response

```
{
  "response":{
    "outbound_route":[
      {
        "members":[],
        "out_of_service":"no",
        "outbound_rt_index":2,
        "outbound_rt_name":"test123",
        "pattern":"_lxxx",
        "permission":"none",
        "sequence":1
      }
    ],
    "page":1,
    "total_item":1,
    "total_page":1
  },
  "status":0
}
```

Key Word	Value	Mandat ory	Typ e	Note
Request parameter				
Cookie		yes	string	Returned value after login. All requests must include this value. If no cookie is included, error code -6 will be returned.
Page		no	int	Retrieves outbound routes by the page they're on.
item_num		no	int	Extension number on each page, which is, the maximum items of each return. If empty, all members are returned by default.
Sord	acs, desc	no	string	Sorting method. acs stands for ascending, and desc stands for descending.
Sidx		no	string	Sort according to the index.
options	outbound_rt_name, outbound_rt_	no	string	Specifies the information to retrieve. Several items can be entered and

	index, permission, sequence, pattern, out_of_service			separated by commas. If unspecified, all outbound route information will be retrieved.
Successful response				
status	0	yes	int	Successful response, status is 0
outbound_route		yes	Json array	Outbound route list
total_item		yes	int	Total number of items that were returned.
total_page		yes	int	Total number of pages in the list.
Page		yes	int	Page number that the trunks are on.
outbound_rt_index		no	string	ID of the outbound route. Used for updating and deleting outbound routes.
outbound_rt_name		no	string	Name of the outbound route.
Permission		no	string	Privilege Level The required permission level to use the outbound route.
sequence		no	string	Trunk type Peer trunk and register trunk
pattern		no	string	Outbound routing rules. Multiple patterns are separated by commas.
Failed response				
Status		yes	int	Please see the error code list for more details.

listOutboundRoute

addOutboundRoute

The “addOutboundRoute” will allow users to add an outbound route for a specific trunk that needs to be defined using the “**default_trunk_index**”.

Request

```

{
  "request":{
    "action":"addOutboundRoute",
    "cookie":"sid23597213-1574672527",
    "default_trunk_index":"3",
    "outbound_rt_name":"test123",
    "pattern":[
      {
        "match":"_1xxx"
      }
    ]
  }
}

```

o Response

```

{
  "response":{
    "need_apply":"yes"
  },
  "status":0
}

```

Key Word	Value	Mandatory	Type	Note
Request parameter				
cookie		yes	string	Returned value after login. All requests must include this value. If no cookie is included, error code -6 will be returned.
outbound_rt_index		yes	string	The id of the outgoing route, which configuration of the outgoing route is obtained.
outbound_rt_name	2-24 letters/numbers/special characters_-. Mandatory.	yes	string	Outbound route name
default_trunk_index	mandatory	yes	string	Corresponding trunk id used by the outbound route
pattern	mandatory	no	Json array	Available Extensions/Extension Groups after enabling filter on source caller ID. Outgoing prefix All patterns are prefixed by “_” character, but please do not enter more than one “_” at the beginning. All patterns can add

				<p>comments, such as “_pattern /* comment */”. In patterns, some characters have special meanings:</p> <ul style="list-style-type: none">• [12345-9] ... Any digit in the brackets. In this example, 1,2,3,4,5,6,7,8,9 are allowed.• N ... Any digit from 2-9.• Wildcard, matching one or more characters.• ! ... Wildcard, matching zero or more characters immediately.• X ... Any digit from 0-9.• Z ... Any digit from 1-9.• – ... Hyphen is to connect characters and it will be ignored. <p>8. [] Contain special characters ([x], [n], [z]) represent letters x, n, z. Multiple patterns can be one member in json array, which is saved in match.</p> <p>For example, pattern is</p> <pre>_1, _2: "pattern":[{ "allow":null, "match": "_1", "outbound_rt_index":2, "strip_prefix":null }, { "allow":null, "match": "_2", "outbound_rt_index":2, "strip_prefix":null }]</pre>
permission	none, Internal, local, national, international	no	string	outbound permission. internal: internal internal-local: local internal-local-national: nationwide internal-local-national-international: international

out_of_service	Yes, no	no	string	Whether to disable the outgoing route
password	4-10 digits. If null, no outbound password is used.	no	string	Outbound password
strip	[0,32]	no	int	Strip Specify the number of digits that will be stripped from the beginning of the dialed string before the call is placed via the selected trunk. For example, the users will dial 9 as the first digit of a long distance calls. However, 9 should not be sent out via analog lines and the PSTN line. In this case, one digit should be stripped before the call is placed.
prepend	0 to 20 alphanumeric characters or +_ *#	no	string	Prepend Those digits will be prepended after the dialing number is stripped.
enable_wlist	Yes, no	no	string	Enable Filter on Source Caller ID Set to yes to enable filter on Source Caller ID. If enabled, Caller ID must in the selected list or match Custom Dynamic Route to make outbound calls.
Successful response				
status	0	yes	int	The response is successful, status is 0
Failed response				
status		yes	int	Please see the error code list for more details.

addOutboundRoute

getOutboundRoute

The “getOutboundRoute” allows users to get information about an existing outbound route.

Request

```
{
  "request":{
    "action":"getOutboundRoute",
    "cookie":"sid932531770-1574674600",
    "custom_member":"",
    "default_trunk_index":"",
    "enable_wlist":"",
    "failover_outbound_data":"",
    "limitime":"",
    "members":"",
    "out_of_service":"",
    "outbound_route":"2",
    "outbound_rt_index":"",
    "outbound_rt_name":"",
    "password":"",
    "pattern":"",
    "permission":"",
    "pin_sets_id":"",
    "prepend":"",
    "strip":"",
    "time_mode":""
  }
}
```

o Response

```
{
  "response":{
    "failover_outbound_data":[],
    "outbound_route":{
      "custom_member":null,
      "default_trunk_index":3,
      "enable_wlist":"no",
      "limitime":null,
      "members":null,
      "out_of_service":"no",
      "outbound_rt_index":2,
      "outbound_rt_name":"test123",
      "password":null,
      "permission":"none",
      "pin_sets_id":null,
      "prepend":null,
      "strip":0,
      "time_mode":0
    },
    "pattern":[
      {
        "allow":null,
        "match":"_lxxx",
        "outbound_rt_index":2,
        "strip_prefix":null
      }
    ]
  },
  "status":0
}
```

Key Word	Value	Mandatory	Type	Note
Request parameter				
cookie		yes	string	Returned value after login. All requests must include this value. If no cookie is included, error code -6 will be returned

outbound_route		yes	string	Outbound route id, which configuration of the outgoing route is obtained.
Successful response				
status	0	yes	int	The response is successful, status is 0
outbound_route		yes	Json, obj	Configuration of the specified outbound route
outbound_rt_index		yes	string	ID of the outbound route.
outbound_rt_name		no	string	Name of the outbound route
permission	none, Internal, local, national, international	no	string	The required permission level to use the outbound route. disable internal: internal internal-local: local internal-local-national: national internal-local-national-international: international
default_trunk_index		no	string	The ID of the trunk used for the outbound route.
out_of_service	Yes, no		string	Disable this Route Displays whether this outbound route is disabled.
password			string	The password required to use the outbound route
strip			int	Strip The number of digits to remove from the beginning of a dialed number before actually making the call. Don't think the example is necessary in this case.
prepend			string	Prepend The digits to add to the beginning of a dialed number before actually making the call.
enable_wlist	Yes, no		string	Enable Filter on Source Caller ID If enabled, only the selected extensions/extension groups or extensions that satisfy the Custom Dynamic Route pattern can use the outbound route.
members			string	Available Extensions/Extension Groups. The extensions and extension groups that can use this outbound

				route when Enable Filter on Source Caller ID is toggled on. Extension groups will be identified by ID.
pattern		no	json array	<p>Outgoing prefix</p> <p>All patterns are prefixed by "_" character, but please do not enter more than one "_" at the beginning. All patterns can add comments, such as "_pattern /* comment */". In patterns, some characters have special meanings: [12345-9] ... Any digit in the brackets. In this example, 1,2,3,4,5,6,7,8,9 are allowed.</p> <ul style="list-style-type: none"> ● N ... Any digit from 2-9. ● Wildcard, matching one or more characters. ● ! ... Wildcard, matching zero or more characters immediately. ● X ... Any digit from 0-9. ● Z ... Any digit from 1-9. ● - ... Hyphen is to connect characters and it will be ignored. ● [] Contain special characters ([x], [n], [z]) represent letters x, n, z. Multiple patterns can be one member in json array, which is saved in match. <p>For example, pattern is _1, _2:</p> <pre>"pattern":[{ "allow":null, "match":"_1", "outbound_rt_index":2, "strip_prefix":null }, { "allow":null, "match":"_2", "outbound_rt_index":2, "strip_prefix":null }]</pre>
failover_outbound_data			json array	<p>Each failover trunk is a member of json array.</p> <ul style="list-style-type: none"> ● failover_prepend: failover prepend ● failover_strip: failover strip ● failover_trunk_index: failover trunk id ● failover_trunk_sequence: failover trunk sequence ● outbound_rt_index: outbound route id <p>For example, the first failover trunk of outbound route 3 is Trunk 4, strip is 2, prepend is 1:</p> <pre>"failover_outbound_data":[{ "failover_prepend":"1", "failover_strip":2,</pre>

				<pre> "failover_trunk_index":4, "failover_trunk_sequence":1, "outbound_rt_index":3 }] </pre>
Failed response				
status		yes	int	Please see the error code list for more details.

getOutboundRoute

updateOutboundRoute

The “updateOutboundRoute” allows users to update an existing outbound route.

o Request

```

{
  "request":{
    "action":"updateOutboundRoute",
    "cookie":"sid932531770-1574674600",
    "outbound_route":"2",
    "outbound_rt_name":"out1",
    "permission":"internal"
  }
}

```

o Response

```

{
  "response":{
    "need_apply":"yes"
  },
  "status":0
}

```

Key Word	Value	Mandatory	Type	Note
Request parameter				
cookie		yes	string	Returned value after login. All requests must include this value. If no cookie is included, error code -6 will be returned.
outbound_rt_index		yes	string	The id of the outgoing route, which configuration of the outgoing route is updated
outbound_rt_name	Required. 2-24 alphanumeric characters, hyphens	no	string	Outgoing route name

	(-), or underscores (_))			
permission	none, Internal, local, national, international	no	string	outbound permission. internal: internal internal-local: local internal-local-national: nationwide internal-local-national-international: international
default_trunk_index	required	no	string	The corresponding trunk id of the outbound route
pattern	required	no	Json array	<p>Pattern</p> <p>All patterns are prefixed by "_" character, but please do not enter more than one "_" at the beginning. All patterns can add comments, such as "_pattern /* comment */". In patterns, some characters have special meanings:</p> <ul style="list-style-type: none"> • [12345-9] ... Any digit in the brackets. In this example, 1,2,3,4,5,6,7,8,9 are allowed. • N ... Any digit from 2-9 • Wildcard, matching one or more characters. • ! ... Wildcard, matching zero or more characters immediately. • X ... Any digit from 0-9. • Z ... Any digit from 1-9. • - ... Hyphen is to connect characters and it will be ignored. • [] Contain special characters ([x], [n], [z]) represent letters x, n, z. For multiple modes, see the array written in json. For example, rules for allowing 2xxx, 12xx outgoing is set as following: [{"match": "_2xxx/*asadad*/*"}, {"match": "_12xx"}]
out_of_service	Yes, no	no	string	Whether to disable the outgoing route
password	4-10 digits. If not configured, no password will be used for the outbound route.			
strip	0-32	no	int	Strip

				Specify the number of digits that will be stripped from the beginning of the dialed string before the call is placed via the selected trunk. For example, the users will dial 9 as the first digit of a long-distance calls. However, 9 should not be sent out via analog lines and the PSTN line. In this case, one digit should be stripped before the call is placed.
prepend	0-20 alphanumeric characters or special characters + _ # *	no	string	Prepend The digits that will be prepended after the dialing number is stripped.
enable_wlist	Yes, no	no	string	Enable Filter on Source Caller ID Set yes to enable filter on Source Caller ID. If enabled, Caller ID must in the selected list or match Custom Dynamic Route to make outbound calls.
members		no	string	Available Extensions/Extension Groups after enabling filter on source caller ID. If is extension group, use the id of the group. Multiple should be separated by commas:6000,6001,group-1
Successful response				
status	0	yes	int	The response is successful, status is 0
Failed response				
status		yes	int	Please see the error code list for more details.

updateOutboundRoute

deleteOutboundRoute

The “deleteOutboundRoute” action allows users to delete an existing outbound route.

Request

```
{
  "request": {
    "action": "deleteOutboundRoute",
    "cookie": "sid932531770-1574674600",
    "outbound_route": "2"
  }
}
```

- **Response**

```
{
  "response": {
    "need_apply": "yes"
  },
  "status": 0
}
```

Key Word	Value	Mandatory	Type	Note
Request parameter				
cookie		yes	string	Returned value after login. All requests must include this value. If no cookie is included, error code -6 will be returned.
inbound_route		yes	string	The ID of the inbound route
Successful response				
status	0	yes	int	The response is successful, status is 0.
need_apply	Yes, no	yes	string	Whether “Apply” is required for the configuration to take effect.
Failed response				
status		yes	int	Please see the error code list for more details.

deleteOutboundRoute

PIN Group

addPinSets

The “addPinSets” allows the user to add a new PIN group.

- **Request**


```
{
  "request":{
    "action":"addPinSets",
    "cookie":"sid448621180-1620223665",
    "members":[
      {
        "pin":"1234",
        "pin_name":"testmember",
        "pin_sets_id":"1602745045405"
      }
    ],
    "pin_sets_id":"1602745045405",
    "pin_sets_name":"test",
    "record_in_cdr":"yes"
  }
}
```

◦ Response

```
{
  "response":{
    "need_apply":"yes"
  },
  "status":0
}
```

updatePinSets

“updatePinSets” allow users to update an existing PIN group.

◦ Request

```
{
  "request":{
    "action":"updatePinSets",
    "cookie":"sid227949405-1609409802",
    "members":[
      {
        "pin":"4567",
        "pin_name":"testmember22",
        "pin_sets_id":"1602745045405"
      }
    ],
    "pin_sets_id":"1602745045405",
    "pin_sets_name":"testtttttt",
    "record_in_cdr":"yes"
  }
}
```

◦ Response

```
{
  "response":{
    "need_apply":"yes"
  },
  "status":0
}
```

getPinSets

“getPinSets” allow users to retrieve details of a specific PIN group.

◦ Request

```
{
  "request":{
    "action":"getPinSets",
    "cookie":"sid227949405-1609409802",
    "pin_sets_id":"1602745045405"
  }
}
```

◦ Response

```
{
  "response":{
    "members":[
      {
        "pin":"4567",
        "pin_name":"testmember22",
        "pin_sets_id":"1602745045405"
      }
    ],
    "pin_sets_id":{
      "pin_sets_id":"1602745045405",
      "pin_sets_name":"testtttttt",
      "record_in_cdr":"yes"
    }
  },
  "status":0
}
```

deletePinSets

deletePinSets allows users to delete an existing PIN group

◦ Request

```
{
  "request":{
    "action":"deletePinSets",
    "cookie":"sid227949405-1609409802",
    "pin_sets_id":"1602745045405"
  }
}
```

◦ Response

```
{
  "response":{
    "need_apply":"yes"
  },
  "status":0
}
```

Key Word	Value	Mandatory	Type	Note
Request parameter				
cookie		yes	string	Returned value after login. All requests must include this value. If no cookie is included, error code -6 will be returned.

member		yes	Json array	List of the PIN group members.
pin		yes	int	PIN number that will be required to dial out.
pin_name		yes	string	PIN name.
Pin_sets_id		yes	int	The ID of the Pin group.
Pin_sets_name		yes	string	The name of the Pin group.
Record_in_cdr	yes, no	no	string	Specify Whether or not to display the used PIN group and name in a call's CDR entry.
Successful response				
status	0	yes	int	The response is successful, status is 0
need_apply	Yes, no	yes	string	Whether “Apply” is required for the configuration to take effect.
members		yes	Json array	List of the members of the pin group.
Pin_sets_id		yes	int	Indicates the Pin group ID.
pin_sets_name		no	string	Indicates the pin name.
record_in_cdr	Yes, no	no	string	Indicates whether the extension is out of service
Failed response				
status		yes	int	Please see the error code list for more details.

PIN Group

Inbound Route

listInboundRoute

The “listInboundRoute” allows users to list the existing inbound routes such as the route’s name, its permission, etc.

Note: The needed information, can be defined in the parameter “**options**”.

◦ Request

```
{
  "request":{
    "action":"listInboundRoute",
    "cookie":"sid932531770-1574674600",
    "trunk_index":"1"
  }
}
```

- **Response**

```

"response":{
  "inbound_route":[
    {
      "account":null,
      "accout_voicemail_out_of_service":"no",
      "alertinfo":null,
      "announcement":null,
      "blocking_did_collect_calls":"no",
      "callback":null,
      "conference":null,
      "destination_type":"byDID",
      "dialdirect":"no",
      "did_pattern_allow":"",
      "did_pattern_match":"_",
      "did_strip":0,
      "directory":null,
      "disa":null,
      "en_multi_mode":"no",
      "enable_fax_detect":"no",
      "enable_inbound_muti_mode":"no",
      "external_number":null,
      "fax":null,
      "fax_intelligent_route":"email",
      "fax_intelligent_route_destination":null,
      "inbound_mode":0,
      "inbound_muti_mode":0,
      "inbound_rt_index":1,
      "inbound_suffix":null,
      "incoming_prepend":null,
      "ivr":null,
      "members":[
        {
          "account":null,
          "announcement":null,
          "callback":null,
          "conference":null,
          "destination_type":"byDID",
          "did_strip":0,
          "directory":null,
          "disa":null,
          "en_multi_mode":"no",
          "end_hour":"",
          "end_min":"",
          "external_number":null,
          "fax":null,
          "inbound_mode":"0",
          "ivr":null,
          "mode":"",
          "multimedia_conference":null,
          "paginggroup":null,

          "queue":null,
          "ringgroup":null,
          "sequence":"0",
          "start_hour":"",
          "start_min":"",
          "tc":"0",
          "timetype":"0",
          "vmgroup":null,
          "voicemail":null
        }
      ],
      "multimedia_conference":null,
      "out_of_service":"no",
      "paginggroup":null,
      "permission":"internal-local-national-
international",
      "prepend_inbound_name":null,
      "prepend_inbound_name_enable":null,
      "prepend_trunk_name":"no",
      "queue":null,
      "ringgroup":null,
      "set_callerid_enable":"no",
      "set_callerid_name":"${CALLERID(name)}",
      "set_callerid_number":"${CALLERID(num)}",
      "trunk_index":1,

```

```

        "vmgroup":null,
        "voicemail":null
    }
},
"page":1,
    "total_item":1,
    "total_page":1
},
    "status":0
}

```

Key Word	Value	Mand atory	Typ e	Note
Request parameter				
cookie		yes	string	Returned value after login. All requests must include this value. If no cookie is included, error code -6 will be returned.
page		no	int	Retrieves all the inbound routes on the specified page.
item_num		no	int	Retrieves the maximum number of inbound routes to retrieve for the query. If unspecified, all inbound routes will be returned.
sord	acs,desc	no	string	Sorting method. acs stands for ascending, and desc stands for descending.
sidx		no	string	Sort according to the index.
trunk_index		yes	int	The ID of the trunk of which to retrieve the inbound routes of.
options	inbound_rt_index, did_pattern_match, did_pattern_allow, out_of_service	no	string	See previous comments regarding similar parameter
Successful response				
status	0	yes	int	The response is successful, status is 0
inbound_route		yes	Json array	List of inbound routes
total_item		yes	int	Total number of items that were returned.

total_page		yes	int	Total number of pages in the list.
page		yes	int	Page number that the trunks are on.
inbound_route_index		yes	string	ID of the inbound route.
members		yes	Json array	Destination of the inbound route
did_pattern_match		no	string	<p>Callee id pattern match mode of the inbound route</p> <p>All patterns are prefixed by "_" character, but please do not enter more than one "_" at the beginning. All patterns can add comments, such as "_pattern /* comment */". In patterns, some characters have special meanings:</p> <ul style="list-style-type: none"> • [12345-9] ... Any digit in the brackets. In this example, 1,2,3,4,5,6,7,8,9 are allowed. • N ... Any digit from 2-9. • Wildcard, matching one or more characters. • ! ... Wildcard, matching zero or more characters immediately. • X ... Any digit from 0-9. • Z ... Any digit from 1-9. • - ... Hyphen is to connect characters and it will be ignored. • [] Contain special characters ([x], [n], [z]) represent letters x, n, z.
did_pattern_allow		no	string	Callee pattern match
out_of_service	yes, no	no	string	Indicates whether the extension is out of service
Failed response				
status		yes	int	Please see the error code list for more details.

listInboundRoute

addInboundRoute

The “addInboundRoute” action allows users to add and configure an inbound route for a specific trunk that needs to be defined using the “**trunk_index**”.

○ Request

```
{
  "request":{
    "account":"1001",
    "action":"addInboundRoute",
    "cookie":"sid1302335489-1574676590",
    "destination_type":"account",
    "dial_trunk":"no",
    "did_pattern_match":["{\\"did_pattern_match\\":
\\"_x._\\"}]",
    "did_strip":"0",
    "en_multi_mode":"no",
    "enable_fax_detect":"no",
    "enable_inbound_muti_mode":"no",
    "ext_conference":"no",
    "ext_directory":"no",
    "ext_group":"no",
    "ext_local":"yes",
    "ext_paging":"no",
    "ext_queues":"no",
    "fax_intelligent_route":"email",
    "fax_intelligent_route_destination":"1001",
    "inbound_muti_mode":"0",
    "multi_mode":"[]",
    "out_of_service":"no",
    "permission":"internal",
    "prepend_trunk_name":"no",
    "set_callerid_enable":"no",
    "set_callerid_name":"${CALLERID(name)}",
    "set_callerid_number":"${CALLERID(num)}",
    "time_condition":"[]",
    "trunk_index":"6",
    "voicemailgroups":"no",
    "voicemenus":"no"
  }
}
```

o Response

```
{
  "response":{
    "need_apply":"yes"
  },
  "status":0
}
```

Key Word	Value	Mand atory	Typ e	Note
Request parameter				
cookie		yes	stri ng	Returned value after login. All requests must include this value. If no cookie is included, error code -6 will be returned.
inbound_route		yes	stri ng	Inbound route id, which inbound route to obtain configuration from.
trunk_index		yes	int	Trunk id of inbound route
inbound_suffi x		no	stri ng	Inbound Mode Suffix Dial global inbound feature code + the inbound mode suffix(or dial inbound mode

				<p>suffix) could switch the mode of the inbound route.</p> <p>BLF subscription inbound mode suffix can monitor inbound multiple mode.</p>
inbound_multi_mode		no	string	Inbound mode
permission	Internal, local, national, international	no	string	<p>Inbound permission</p> <p>Internal, local, national, international.</p>
enable_inbound_multi_mode		no	string	<p>Inbound multiple mode</p> <p>Can be configured in the "Inbound Routes" page. If enabled, the global inbound mode will be used. Otherwise, the default mode will be used.</p>
set_callerid_number		no	string	<p>Configure the pattern-matching format to manipulate the numbers of incoming callers or to set a fixed callerID number for calls that go through this inbound route.</p> <ul style="list-style-type: none"> ● `\${CALLERID(num)}`: Default value which indicates the number of an incoming caller (CID). The CID will not be modified. ● `\${CALLERID(num):n}`: Skips the first n characters of a CID number, where n is a number. ● `\${CALLERID(num):-n}`: Takes the last n characters of a CID number, where n is a number. ● `\${CALLERID(num):s:n}`: Takes n characters of a CID number starting from s+1, where n is a number and s is a character position (e.g. `\${CALLERID(num):2:7}` takes 7 characters after the second character of a CID number. ● `\${n}\${CALLERID(num)}`: Prepends n to a CID number, where n is a number.
set_callerid_name			string	<p>Configure the pattern-matching format to customize the callerID name of incoming callers.</p> <ul style="list-style-type: none"> ● `\${CALLERID(name)}`: Default value which indicates the name of an incoming caller. ● `\${A}\${CALLERID(name)}B`: Prepends the character "A"

				<p>and appends the character "B" to <code>\${CALLERID(name)}</code>.</p> <p>Using a string instead of the pattern-matching syntax will set a fixed name to incoming callers.</p>
set_callerid_enabled	yes, no	no	string	Manipulate Caller ID (CID) name and/or number within the call flow.
out_of_service	yes, no	no	string	Whether to disable this inbound route
prepend		no	string	<p>Prepend</p> <p>Those digits will be prepended after the dialing number is stripped.</p>
enable_wlist	yes, no	no	string	<p>Enable Filter on Source Caller ID</p> <p>Set to yes to enable filter on Source Caller ID. If enabled, Caller ID must in the selected list or match Custom Dynamic Route to make outbound calls.</p>
incoming_prepend		no	string	<p>Prepend</p> <p>Those digits will be prepended after the dialing number is stripped.</p>
alertinfo		no	string	Alert info
did_strip		no	string	<p>Strip</p> <p>Specify the number of digits that will be stripped from the beginning of the dialed string before the call is placed via the selected trunk. For example, the users will dial 9 as the first digit of a long distance calls. However, 9 should not be sent out via analog lines and the PSTN line. In this case, one digit should be stripped before the call is placed.</p>
callback		no	string	Default destination-callback
external_number		no	string	Default destination- external number
directory		no	string	Default destination-dial by name

disa		no	string	Default destination-DISA
fax		no	string	Default destination-Fax
paginggroup		no	string	Default destination-paging/intercom group
queue		no	string	Default destination-Queues
ringgroup		no	string	Default destination-ring group
ivr		no	string	Default destination-IVR
vmgroup		no	string	Default destination-voicemail group
conference		no	string	Default destination-conference rooms
voicemail		no	string	Default destination-voicemail
account		no	string	Default destination-extension
prepend_trunk_name	yes, no	no	string	Prepend trunk name
destination_type		no	string	Default destination
did_pattern_allow		no	string	<p>callerID pattern</p> <p>All patterns are prefixed by "_" character, but please do not enter more than one "_" at the beginning. All patterns can add comments, such as "_pattern /* comment */". In patterns, some characters have special meanings:</p> <ul style="list-style-type: none"> ● [12345-9] ... Any digit in the brackets. In this example, 1,2,3,4,5,6,7,8,9 are allowed. ● N ... Any digit from 2-9. ● Wildcard, matching one or more characters. ● ! ... Wildcard, matching zero or more characters immediately. ● X ... Any digit from 0-9. ● Z ... Any digit from 1-9. ● - ... Hyphen is to connect characters and it will be ignored.

				<ul style="list-style-type: none"> • [] Contain special characters ([x], [n], [z]) represent letters x, n, z.
did_pattern_match		yes	string	<p>Pattern</p> <p>All patterns are prefixed by "_" character, but please do not enter more than one "_" at the beginning. All patterns can add comments, such as "_pattern /* comment */". In patterns, some characters have special meanings:</p> <ul style="list-style-type: none"> • [12345-9] ... Any digit in the brackets. In this example, 1,2,3,4,5,6,7,8,9 are allowed. • N ... Any digit from 2-9. • Wildcard, matching one or more characters. • ! ... Wildcard, matching zero or more characters immediately. • X ... Any digit from 0-9. • Z ... Any digit from 1-9. • - ... Hyphen is to connect characters and it will be ignored. • [] Contain special characters ([x], [n], [z]) represent letters x, n, z. <p>Multiple patterns should be separated by commas. For example the patterns are _1xx, _2xx, the configuration should be:</p> <p>"did_pattern_allow": "_1xx,_2xx"</p>
seamless_transfer_did_whitelist		no	string	<p>Extension list allowed to seamless transfer.</p> <p>Allows the selected extension to use this function. If an extension is busy, and a mobile phone is bound to that extension, the mobile phone can pick up calls to that extension.</p>
ext_directory	yes, no	no	string	Dial by name, add at least one destination for the did destination.
ext_paging	yes, no	no	string	Paging/intercom group, add at least one destination for the did destination.
ext_group	yes, no	no	string	Ring group, add at least one destination for the did destination.

ext_queues	yes, no	no	string	Queues, add at least one destination for the did destination.
ext_conference	yes, no	no	string	Conference room, add at least one destination for the did destination.
voicemenus	yes, no	no	string	IVR, add at least one destination for the did destination.
voicemailgroups	yes, no	no	string	Voicemail groups, add at least one destination for the did destination.
ext_fax	yes, no	no	string	Fax, add at least one destination for the did destination
ext_local	yes, no	yes	string	extensions, add at least one destination for the did destination.
dial_trunk	yes, no	no	string	Dial trunk
multi_mode		yes	Json obj	Model
time_condition		yes	Json obj	Time condition
blocking_did_collect_calls	yes, no	no	string	<p>Block Collect Calls</p> <p>If enabled, collect calls will be blocked. Otherwise calls will be dealt as normal calls.</p> <p>Note: Collect calls are indicated by the header "P-Asserted-Service-Info: service-code=Backward Collect Call, P-Asserted-Service-Info: service-code=Collect Call".</p>
Successful response				
status	0	yes	int	The response is successful, status is 0.
need_apply	yes, no	yes	string	Whether “Apply” is required for the configuration to take effect.
Failed response				
status		yes	int	Please see the error code list for more details.

getInboundRoute

The “getInboundRoute” action allows users to get information about a specific inbound route.

- **Request**

```
{
  "request": {
    "action": "getInboundRoute",
    "cookie": "sid1148042340-1574781519"
  }
}
```

- **Response**

```

{
  "response":{
    "inbound_did_destination":{
      "dial_trunk":"yes",
      "ext_conference":"yes",
      "ext_directory":"yes",
      "ext_fax":"yes",
      "ext_group":"yes",
      "ext_local":"yes",
      "ext_multimedia_conference":"yes",
      "ext_paging":"yes",
      "ext_queues":"yes",
      "inbound_rt_index":1,
      "voicemailgroups":"yes",
      "voicemenus":"yes"
    },
    "inbound_routes":{
      "account":null,
      "accout_voicemail_out_of_service":"no",
      "alertinfo":null,
      "announcement":null,
      "blocking_did_collect_calls":"no",
      "callback":null,
      "conference":null,
      "destination_type":"byDID",
      "dialdirect":"no",
      "did_pattern_allow":"",
      "did_pattern_match":"_",
      "did_strip":0,
      "directory":null,
      "disa":null,
      "en_multi_mode":"no",
      "enable_fax_detect":"no",
      "enable_inbound_muti_mode":"no",
      "external_number":null,
      "fax":null,
      "fax_intelligent_route":"email",
      "fax_intelligent_route_destination":null,
      "inbound_muti_mode":0,
      "inbound_rt_index":1,
      "inbound_suffix":null,
      "incoming_prepend":null,
      "ivr":null,
      "multimedia_conference":null,
      "out_of_service":"no",
      "paginggroup":null,
      "permission":"internal-local-national-
international",
      "prepend_inbound_name":null,
      "prepend_inbound_name_enable":null,
      "prepend_trunk_name":"no",
      "queue":null,
      "ringgroup":null,
      "seamless_transfer_did_whitelist":"",
      "set_callerid_enable":"no",
      "set_callerid_name":"${CALLERID(name)}",
      "set_callerid_number":"${CALLERID(num)}",
      "trunk_index":1,
      "vmgroup":null,
      "voicemail":null
    }
  },
  "status":0
}

```

Key Word	Value	Mand atory	Typ e	Note
Request Parameter				

cookie		yes	string	Returned value after login. All requests must include this value. If no cookie is included, error code -6 will be returned.
inbound_route		yes	string	The ID of the inbound route
Successful response				
status	0	yes	int	The response is successful, status is 0
inbound_routes		yes	Json obj	Configuration of the specified inbound route
inbound_suffix		no	string	Inbound Mode Suffix The suffix of the inbound route. Dialing the global inbound mode feature code + this suffix will toggle the route's inbound mode. BLF subscription inbound mode suffix can monitor inbound multiple mode.
inbound_multi_mode		no	string	The current inbound mode of the inbound route.
permission	Internal, local, national, international	no	string	Privilege Level. Permission level of incoming calls when they are routed to other trunks. This must be equal to or higher than the destination trunk's Privilege Level for calls to be routed successfully.
enable_inbound_multi_mode		no	string	Inbound multiple mode Displays whether this route
set_callerid_number		no	string	Configure the pattern-matching format to manipulate the numbers of incoming callers or to set a fixed CallerID number for calls that go through this inbound route <ul style="list-style-type: none"> `\${CALLERID(number)}`: Default value which indicates the number of an incoming caller

				<p>(CID). The CID will not be modified.</p> <ul style="list-style-type: none"> <p><code>\${CALLERID(num):n}</code>: Skips the first n characters of a CID number, where n is a number.</p> <p><code>\${CALLERID(num):-n}</code>: Takes the last n characters of a CID number, where n is a number.</p> <p><code>\${CALLERID(num):s:n}</code>: Takes n characters of a CID number starting from s+1, where n is a number and s is a character position (e.g. <code>\${CALLERID(num):2:7}</code> takes 7 characters after the second character of a CID number).</p> <p><code>n\${CALLERID(num)}</code>: Prepends n to a CID number, where n is a number.</p>
set_callerid_name			string	<p>Configure the pattern-matching format to customize the CallerID name of incoming callers.</p> <ul style="list-style-type: none"> <p><code>\${CALLERID(name)}</code>: Default value which indicates the name of an incoming caller.</p> <p><code>A\${CALLERID(name)}B</code>: Prepends the character "A" and appends the character "B" to <code>\${CALLERID(name)}</code>.</p> <p>Using a string instead of the pattern-matching syntax will set a fixed name to incoming callers.</p>
set_callerid_enable	yes, no	no	string	<p>Set CallerID Info Displays whether the route will manipulate the CID information of incoming calls based on <code>set_callerid_number</code> and <code>set_callerid_name</code>.</p>

out_of_service	yes, no	no	string	Indicates whether the extension is out of service
prepend		no	string	Prepend The digits to add to the beginning of a dialed number before actually making the call.
alertinfo		no	string	Alert info
callback		no	string	The number configured for callback when selected as Default Destination.
external_number		no	string	The number configured for external number when selected as Default Destination.
directory		no	string	The number configured for dial by name when configured as Default Destination.
disa		no	string	Default destination-DISA
fax		no	string	Default destination-Fax
paginggroup		no	string	Default destination-paging/intercom group
queue		no	string	Default destination-Queues
ringgroup		no	string	Default destination-ring group
ivr		no	string	Default destination-IVR
vmgroup		no	string	Default destination-voicemail group
conference		no	string	Default destination-conference rooms
voicemail		no	string	Default destination-voicemail
account		no	string	Default destination-extension
prepend_trunk_name	yes, no	no	string	Prepend trunk name

destination_type		no	string	<p>Default Destination</p> <p>The destination that incoming calls will be routed to.</p>
did_pattern_allow		no	string	<p>callerID pattern</p> <p>All patterns are prefixed by "_" character, but please do not enter more than one "_" at the beginning. All patterns can add comments, such as "_pattern /* comment */". In patterns, some characters have special meanings:</p> <ul style="list-style-type: none"> ● N ... Any digit from 2-9. ● Wildcard, matching one or more characters. ● ! ... Wildcard, matching zero or more characters immediately. ● X ... Any digit from 0-9. ● Z ... Any digit from 1-9. ● - ... Hyphen is to connect characters and it will be ignored. ● [] Contain special characters ([x], [n], [z]) represent letters x, n, z. <p>Multiple patterns should be separated by commas. For example the patterns are _123, _234, the configuration should be: "did_pattern_allow": "_123, _234"</p>
did_pattern_match		yes	string	<p>All patterns are prefixed by "_" character, but please do not enter more than one "_" at the beginning. All patterns can add comments, such as "_pattern /* comment */". In patterns, some characters have special meanings:</p> <ul style="list-style-type: none"> ● [12345-9] ... Any digit in the brackets. In this example, 1,2,3,4,5,6,7,8,9 are allowed. ● N ... Any digit from 2-9. ● Wildcard, matching one or more characters.

				<ul style="list-style-type: none"> ● ! ... Wildcard, matching zero or more characters immediately. ● X ... Any digit from 0-9. ● Z ... Any digit from 1-9. ● - ... Hyphen is to connect characters and it will be ignored. ● [] Contain special characters ([x], [n], [z]) represent letters x, n, z. <p>Multiple patterns should be separated by commas. For example the patterns are _1xx, _2xx, the configuration should be:</p> <p>"did_pattern_allow": "_1xx, _2xx"</p>
trunk_index		yes	string	ID of the trunk associated with the inbound route.
seamless_transfer_did_whitelist		no	string	List of extensions allowed to seamless transfer. Allows the selected extension to use this function. If an extension is busy, and a mobile phone is bound to that extension, the mobile phone can pick up calls to that extension.
inbound_did_destination		yes	Json obj	<p>Allowed DID Destination</p> <p>Extension types that incoming calls can be routed to when “By DID” is selected for Default Destination..</p>
ext_directory		no	string	Dial by name
ext_paging		no	string	Paging/intercom group
ext_group		no	string	Ring group
ext_queues		no	string	queues
ext_conference		no	string	Conference room
voicemenus		no	string	IVR

voicemailgroups		no	string	Voicemail groups
ext_fax		no	string	Fax
ext_local		no	string	extensions
dial_trunk	yes, no	no	string	Dial trunk
blocking_did_collect_calls	yes, no	no	string	Block collect calls Indicates whether or not collect calls will be blocked. Note: Collect calls are indicated by the header "P-Asserted-Service-Info: service-code=Backward Collect Call, P-Asserted-Service-Info: service-code=Collect Call".
Failed response				

getInboundRoute

updateInboundRoute

The “updateInboundRoute” action allows users to update an existing inbound route.

Request

```
{
  "request":{
    "account":"1001",
    "action":"updateInboundRoute",
    "cookie":"sid1058050971-1574689082",
    "destination_type":"account",
    "inbound_route":"3"
  }
}
```

Response

```
{
  "response":{
    "need_apply":"yes"
  },
  "status":0
}
```

Key Word	Value	Mandatory	Type	Note
Request Parameter				

cookie		yes	string	Returned value after login. All requests must include this value. If no cookie is included, error code -6 will be returned.
inbound_route		yes	string	The ID of the inbound route
inbound_suffix		no	string	Inbound Mode Suffix The suffix of the inbound route. Dialing the global inbound mode feature code + this suffix will toggle the route's inbound mode. BLF subscription inbound mode suffix can monitor inbound multiple mode.
inbound_multi_mode		no	string	The current inbound mode of the inbound route.
permission	Internal, local, national, international	no	string	Privilege Level. Permission level of incoming calls when they are routed to other trunks. This must be equal to or higher than the destination trunk's Privilege Level for calls to be routed successfully.
enable_inbound_multi_mode		no	string	Inbound multiple mode Displays whether this route
set_callerid_number		no	string	Configure the pattern-matching format to manipulate the numbers of incoming callers or to set a fixed CallerID number for calls that go through this inbound route <ul style="list-style-type: none"> • `\${CALLERID(num)}`: Default value which indicates the number of an incoming caller (CID). The CID will not be modified. • `\${CALLERID(num):n}`: Skips the first n characters of a CID number, where n is a number. • `\${CALLERID(num):-n}`: Takes the last n characters of a CID number, where n is a number. • `\${CALLERID(num):s:n}`: Takes n

				<p>characters of a CID number starting from s+1, where n is a number and s is a character position (e.g. <code>\${CALLERID(num):2:7}</code> takes 7 characters after the second character of a CID number).</p> <ul style="list-style-type: none"> <code>n\${CALLERID(num)}</code>: Prepends n to a CID number, where n is a number.
set_callerid_name			string	<p>Configure the pattern-matching format to customize the CallerID name of incoming callers.</p> <ul style="list-style-type: none"> <code>\${CALLERID(name)}</code>: Default value which indicates the name of an incoming caller. <code>AS\${CALLERID(name)}B</code>: Prepends the character "A" and appends the character "B" to <code>\${CALLERID(name)}</code>. <p>Using a string instead of the pattern-matching syntax will set a fixed name to incoming callers.</p>
set_callerid_enable	yes, no	no	string	Set callerID info Manipulate Caller ID (CID) name and/or number within the call.
out_of_service	yes, no	no	string	Whether to disable the inbound route.
prepend		no	string	Prepend Those digits will be prepended after the dialing number is stripped.
enable_wlist	yes, no	no	string	Enable Filter on Source Caller ID Set to yes to enable filter on Source Caller ID. If enabled, Caller ID must in the selected list or match Custom Dynamic Route to make outbound calls.
incoming_prepend		no	string	Prepend Those digits will be prepended after the dialing number is stripped.

alertinfo		no	string	Alert info
did_strip		no	string	Strip Specify the number of digits that will be stripped. For example, the users will dial 9 as the first digit of a long-distance calls. However, 9 should not be sent out via analog lines and the PSTN line. In this case, one digit should be stripped before the call is placed.
callback		no	string	The number configured for callback when selected as Default Destination.
external_number		no	string	The number configured for external number when selected as Default Destination.
directory		no	string	Default destination-dial by name
disa		no	string	Default destination-DISA
fax		no	string	Default destination-Fax
paginggroup		no	string	Default destination-paging/intercom group
queue		no	string	Default destination-Queues
ringgroup		no	string	Default destination-ring group
ivr		no	string	Default destination-IVR
vmgroup		no	string	Default destination-voicemail group
conference		no	string	Default destination-conference rooms
voicemail		no	string	Default destination-voicemail
account		no	string	Default destination-extension
prepend_trunk_name	yes, no	no	string	Prepend trunk name

destination_type		no	string	<p>Default Destination</p> <p>The destination that incoming calls will be routed to.</p>
did_pattern_allow		no	string	<p>callerID pattern</p> <p>All patterns are prefixed by "_" character, but please do not enter more than one "_" at the beginning. All patterns can add comments, such as "_pattern /* comment */".</p> <p>In patterns, some characters have special meanings:</p> <ul style="list-style-type: none"> • N ... Any digit from 2-9. • Wildcard, matching one or more characters. • ! ... Wildcard, matching zero or more characters immediately. • X ... Any digit from 0-9. • Z ... Any digit from 1-9. • - ... Hyphen is to connect characters and it will be ignored. • [] Contain special characters ([x], [n], [z]) represent letters x, n, z. <p>Multiple patterns should be separated by commas. For example the patterns are _123, _234, the configuration should be: "did_pattern_allow": "_123, _234"</p>
did_pattern_match		yes	string	<p>All patterns are prefixed by "_" character, but please do not enter more than one "_" at the beginning. All patterns can add comments, such as "_pattern /* comment */".</p> <p>In patterns, some characters have special meanings:</p> <ul style="list-style-type: none"> • [12345-9] ... Any digit in the brackets. In this example, 1,2,3,4,5,6,7,8,9 are allowed. • N ... Any digit from 2-9. • Wildcard, matching one or more characters. • ! ... Wildcard, matching zero or more

				<p>characters immediately.</p> <ul style="list-style-type: none"> • X ... Any digit from 0-9. • Z ... Any digit from 1-9. • - ... Hyphen is to connect characters and it will be ignored. • [] Contain special characters ([x], [n], [z]) represent letters x, n, z. <p>Multiple patterns should be separated by commas. For example the patterns are _1xx, _2xx, the configuration should be:</p> <p>"did_pattern_allow": "_1xx, _2xx"</p>
seamless_transfer _did_whitelist		no	string	<p>List of extensions allowed to seamless transfer. Allows the selected extension to use this function. If an extension is busy, and a mobile phone is bound to that extension, the mobile phone can pick up calls to that extension.</p>
ext_directory		no	string	Dial by name
ext_paging		no	string	Paging/intercom group
ext_group		no	string	Ring group
ext_queues		no	string	queues
ext_conference		no	string	Conference room
voicemenus		no	string	IVR
voicemailgroups		no	string	Voicemail groups
ext_fax		no	string	Fax
ext_local		no	string	extensions
dial_trunk	yes, no	no	string	Dial trunk

multi_mode		yes	Json obj	Model
time_condition		yes	Json obj	Time condition
blocking_did_collect_calls	yes, no	no	string	Block collect calls Indicates whether or not collect calls will be blocked. Note: Collect calls are indicated by the header "P-Asserted-Service-Info: service-code=Backward Collect Call, P-Asserted-Service-Info: service-code=Collect Call".
Successful response				
status	0	yes	int	The response is successful, status is 0
need_apply	Yes, no	yes	string	Whether “Apply” is required for the configuration to take effect
Failed response				
status		yes	int	Please see the error code list for more details.

updateInboundRoute

deleteInboundRoute

The “deleteInboundRoute” action allows users to delete an existing inbound route.

◦ Request

```
{
  "request": {
    "action": "deleteInboundRoute",
    "cookie": "sid1058050971-1574689082",
    "inbound_route": "3"
  }
}
```

◦ Response

```
{
  "response": {
    "need_apply": "yes"
  },
  "status": 0
}
```

Key Word	Value	Mandatory	Type	Note
Request parameter				
cookie		yes	string	Returned value after login. All requests must include this value. If no cookie is included, error code -6 will be returned.
outbound_route		yes	string	The id of the outbound route, which configuration of the outbound route is obtained
Successful response				
status	0	yes	int	The response is successful, status is 0.
Failed response				
status		yes	int	Please see the error code list for more details.

deleteInboundRoute

Inbound Route Blacklist

listInboundBlacklist

Query the basic information for the PBX inbound route blacklist, such as blacklist number and range

Request

Parameters	Mandatory	Type	Description
Cookie	Yes	String	This is the return value after login. All requests need to carry this value.

			If no cookie is included, error code -6 will be returned
Sord	No	String	Sorting rule. Range: <ul style="list-style-type: none">• ascending• descending• default : ascending
Sidx	No	String	Sort by this string.

Parameter	Type	Description
status	Integer	If response is successful, status is 0.
number	String	Blacklist number
inbound_rt_index	String	<p>Range. Enter inbound route id. If inbound route id is 0, it means all inbound route will take effect.</p> <ul style="list-style-type: none"> ● 0: all inbound route. ● Existing inbound route id.
total_item	Integer	Total number of inbound route blacklist.
total_page	Integer	Total number of pages.
page	Integer	Page number
total_blacklist_item	Integer	Total number of pages.

◦ **Response:** failed

Parameter	Type	Description
status	Integer	See error code.

Example:

◦ **Request**

Query inbound route blacklist:

```
{
  "request": {
    "action": "listInboundBlacklist",
    "cookie": "sid323724187-1655780813"
  }
}
```

◦ **Response**

```
{
  "response": {
    "number": [
      {
        "number": "123",
        "inbound_rt_index": "1"
      },
      {
        "number": "1234",
        "inbound_rt_index": "0"
      }
    ],
    "total_item": 2,
    "total_page": 1,
    "page": 1,
    "total_blacklist_item": 2
  },
  "status": 0
}
```

deleteAllInboundBlacklist

Delete PBX's all inbound route blacklist

◦ Request

Parameter	Mandatory	Type	Description
cookie	yes	String	This is the return value after login. All requests need to carry this value. If no cookie is inc

			cluded, error code -6 will be retur ned
--	--	--	--

o **Response:** successful

Parameter	Type	Description
Status	Integer	If response is successful, status is 0
need_apply	String	Whether to require "apply" to make configuration take effect. Range: <ul style="list-style-type: none">• yes• no

o **Response:** failed

Parameter	Type	Description
status	Integer	See error code.

Example:

o **Request:**

```
{
  "request":{
    "action":"deleteAllInboundBlacklist",
    "cookie":"sid323724187-1655780813"
  }
}
```

o **Response:**

```
{
  "response": {
    "need_apply": "yes"
  },
  "status": 0
}
```

deleteInboundBlacklist

Delete IPPBX's specific inbound route blacklist.

◦ Request

Parameter	Mandatory	Type	Description
cookie	yes	String	This is the return value after login. All requests need to carry this value. If no cookie is included, error code -6 will

			be ret ur ne d.
number	yes	String	Bl ac kli st nu m be r

- **Response:** Successful

Parameter	Type	Description
Status	Integer	If response is successfull, status is 0
need_apply	String	Whether to require "apply" to make configuration take effect. Range: <ul style="list-style-type: none"> • yes • no

- **Response:** Failed

Parameter	Type	Description
status	Integer	See error code.

Example:

Delete number "123" from inbound route blacklist.

- **Request**

```
{
  "request":{
    "action":"deleteInboundBlacklist",
    "number":"123",
    "cookie":"sid323724187-1655780813"
  }
}
```

- **Response**

```
{
  "response": {
    "need_apply": "yes"
  },
  "status": 0
}
```

addInboundBlacklist

Add inbound route blacklist and configure related information such as blacklist number and range.

◦ Request

Parameter	Mandatory	Type	Description
cookie	yes	String	This is the return value after login. All requests need to carry this value. If no cookie is included, error code -6 will

			Il be ret ur ne d.
number	yes	String	Bl ac kli st nu m be r
inbound_rt_index	yes	String	Ra ng e. En ter in bo un d ro ute id. If in bo un d ro ute id is 0, it me an s all in bo un d ro ute wi ll tak e eff ect . ● 0 : a l l i n b o u

			n d r o u t e . <ul style="list-style-type: none">• Existing inbound route id.
--	--	--	--

o **Response:** Successful

Parameter	Type	Description
status	Integer	If response is successful, status is 0.
number	String	Blacklist number
inbound_rt_index	String	Range. Enter inbound route id. If inbound route id is 0, it means all inbound route will take effect. <ul style="list-style-type: none">• 0: all inbound route.• Existing inbound route id.
total_item	Integer	Total number of inbound route blacklist.

total_page	Integer	Total number of pages.
page	Integer	Page number
total_blacklist_item	Integer	Total number of pages.

- **Response:** Failed

Parameter	Type	Description
status	Integer	See error code.

Example:

- **Request**

Add blacklist 123 and configure the range to take effect. For example, to specify the inbound route to take effect, please use listInboundRoute interface to obtain inbound route id first.

```
{
  "request": {
    "action": "addInboundBlacklist",
    "inbound_rt_index": " ****get by listInboundRoute**** ",
    "number": "123",
    "cookie": "sid323724187-1655780813"
  }
}
```

- **Response:** Successful

```
{
  "response": {
    "need_apply": "yes"
  },
  "status": 0
}
```

updateInboundBlacklist

Modify inbound route blacklist and the range to take effect.

- **Request**

Parameter	Mandatory	Type	Description
cookie	yes	String	This is the return value after login.

			All requests need to carry this value. If no cookie is included, error code -6 will be returned.
number	yes	String	Blacklist number
inbound_rt_index	yes	String	Range. Enter inbound route id. If inbound route id is 0, it means all inbound route will take effect. <ul style="list-style-type: none">0 : all inbound route

			o u t e . • E x i s t i n g i n b o u n d r o u t e i d .
--	--	--	---

o **Response:** Successful

Parameter	Type	Description
status	Integer	If response is successful, status is 0.
number	String	Blacklist number
inbound_rt_index	String	Range. Enter inbound route id. If inbound route id is 0, it means all inbound route will take effect. • 0: all inbound route. • Existing inbound route id.
total_item	Integer	Total number of inbound route blacklist.
total_page	Integer	Total number of pages.

page	Integer	Page number
total_blacklist_item	Integer	Total number of pages.

- **Response:** Failed

Parameter	Type	Description
status	Integer	See error code.

Example:

- **Request**

Modify blacklist number 123 effective range. Please use list InboundRoute interface to obtain inbound route id first.

```
{
  "request": {
    "action": "updateInboundBlacklist",
    "inbound_rt_index": " ****get by listInboundRoute**** ",
    "number": "123",
    "cookie": "sid323724187-1655780813"
  }
}
```

- **Response**

```
{
  "response": {
    "need_apply": "yes"
  },
  "status": 0
}
```

getInboundBlacklistSettings

Get inbound route blacklist settings, i.e., whether to use blacklist.

- **Request**

Parameter	Mandatory	Type	Description
cookie	yes	String	This is the return value after login. All requests need to carry this value. If no cookie is included, error code -6 will be returned.

- **Response:** Successful

Parameter	Type	Description
-----------	------	-------------

status	Integer	If response is successful, status is 0.
number	String	Blacklist number
inbound_rt_index	String	<p>Range. Enter inbound route id. If inbound route id is 0, it means all inbound route will take effect.</p> <ul style="list-style-type: none"> ● 0: all inbound route. ● Existing inbound route id.
total_item	Integer	Total number of inbound route blacklist.
total_page	Integer	Total number of pages.
page	Integer	Page number
total_blacklist_item	Integer	Total number of pages.

◦ **Response:** Failed

Parameter	Type	Description
status	Integer	See error code.

Example:

Get inbound route blacklist settings, i.e., whether a blacklist is enabled or not.

◦ **Request:**

```
{
  "request":{
    "action":"getInboundBlacklistSettings",
    "cookie":"sid323724187-1655780813"
  }
}
```

◦ **Response:**

```
{
  "response": {
    "inbound_blacklist_settings": {
      "enable": "yes"
    }
  },
  "status": 0
}
```

updateInboundBlacklistSettings

Modify inbound route blacklist settings, i.e., whether to enable a blacklist.

◦ Request

Parameter	Mandatory	Type	Description
cookie	yes	String	This is the return value after login. All requests need to carry this value. If no cookie is included, error code -6 will

			Il be ret ur ne d.
number	yes	String	Bl ac kli st nu m be r
inbound_rt_index	yes	String	Ra ng e. En ter in bo un d ro ute id. If in bo un d ro ute id is 0, it me an s all in bo un d ro ute wi ll tak e eff ect . ● 0 : a l l i n b o u

			nd route. <ul style="list-style-type: none">Existing inbound route id.
--	--	--	--

o **Response:** Successful

Parameter	Type	Description
status	Integer	If response is successful, status is 0.
number	String	Blacklist number
inbound_rt_index	String	Range. Enter inbound route id. If inbound route id is 0, it means all inbound route will take effect. <ul style="list-style-type: none">0: all inbound route.Existing inbound route id.
total_item	Integer	Total number of inbound route blacklist.

total_page	Integer	Total number of pages.
page	Integer	Page number
total_blacklist_item	Integer	Total number of pages.

- **Response:** Failed

Parameter	Type	Description
status	Integer	See error code.

Example:

- **Request**

```
{
  "request":{
    "action":"updateInboundBlacklistSettings",
    "enable":"yes",
    "cookie":"sid323724187-1655780813"
  }
}
```

- **Response**

```
{
  "response": {
    "need_apply": "yes"
  },
  "status": 0
}
```

playPromptByOrg

The “playPromptByOrg” actions allows to play the selected prompt in the configured extension.

- **Request**

The request below sends an IVR named “prompt1” to extension 1000

```
{
  "request":{
    "action":"playPromptByOrg",
    "channel":"1000",
    "cookie":"sid1863069817-1574933211",
    "type":"ivr"
    "variable":"prompt1"
  }
}
```

Send an IVR prompt named “prompt2” to extension groups named “group1” and “group2”, ring group extensions 6400 and extension 6401, and extensions 1000 and 1001.

```
{
  "request":{
    "action": "playPromptByOrg",
    "type": "ivr",
    "cookie": "sid612583207-1551962142",
    "Variable": "prompt2",
    "specified_channel":
    [{"exten_type":"extension_group", "extension":"group1,group2"},
    {"exten_type":"ringgroup", "extension":"6400,6401"},
    {"exten_type":"extension", "extension":"1000,1001"}]
  }
}
```

Send the name prompt for extension 1001 to extension 1002.

```
{
  "request": {
    "action": "playPromptByOrg",
    "type": "name_voice",
    "cookie": "sid2006520196-1731582161",
    "Variable": "1001",
    "channel": "1002"
  }
}
```

Send an MoH audio prompt named "macroform-cold_day" that's under the Default playlist.

```
{
  "request": {
    "action": "playPromptByOrg",
    "type": "moh",
    "cookie": "sid612583207-1551962142",
    "Variable": "macroform-cold_day",
    "class": "",
    "channel": "2000"
  }
}
```

o Response

```
{
  "response":{
    "need_apply":"yes"
  },
  "status":0
}
```

Key Word	Value	Mandatory	Type	Note
Request parameter				
cookie		yes	string	Returned value after login. All requests must include this value. If no cookie is included, error code -6 will be returned.
type	ivr, name_voice, moh	yes	string	Type of audio prompt to play. <ul style="list-style-type: none"> ● ivr: Custom prompt uploaded to IVR. ● name_voice: Username prompt for an extension

				<ul style="list-style-type: none"> ● moh: Music on Hold file
channel		yes	string	Extension to send the prompt to. Example: If set to 6000, extension 6000 will ring, and the prompt will play upon answering the call
specified_channel		no	json string	Specifies the target extensions, extension group names, and ring group extensions to send the voice prompt to in a json array format.
variable		yes	string	File name of the audio prompt File extension is not necessary. The audio prompt should exist under the specified type.
class		no	string	Music on Hold Playlist If “moh” is selected as type, enter the MoH playlist name. If unspecified, the Default playlist will be used.
Successful response				
status	0	yes	int	The response is successful, status is 0.
Failed response				
status		yes	int	Please see the error code list for more details.

playPromptByOrg

Voice Call

listBridgedChannels

The “listBridgedChannels” action will list the bridged channels.

◦ Request

```
{
  "request": {
    "action": "listBridgedChannels",
    "cookie": "sid95569340-1574692824"
  }
}
```

◦ Response

```

{
  "response":{
    "channel":[
      {
        "bridge_id":"7f12ed1a-f03d-4575-a4cb-f986f864c2a2",
        "bridge_time":"2019-11-25 09:43:19",
        "callerid1":"1001",
        "callerid2":"1000",
        "channel1":"PJSIP/1001-00000002",
        "channel2":"PJSIP/1000-00000003",
        "have_send":1,
        "inbound_trunk_name":"",
        "name1":"1001",
        "name2":"",
        "outbound_trunk_name":"",
        "uniqueid1":"1574692996.4",
        "uniqueid2":"1574692996.5"
      }
    ],
    "page":1,
    "total_item":1,
    "total_page":1
  },
  "status":0
}

```

Key Word	Value	Mandatory	Type	Note
Request parameter				
cookie		yes	string	Returned value after login. All requests must include this value. If no cookie is included, error code -6 will be returned.
Successful response				
status	0	yes	int	The response is successful, status is 0.
total_item			int	Current number of established calls.
page			int	Current page is on.
channel			Json array	Detailed list of currently established calls.
channel1			string	<p>The calling channel. If the call is from an extension, the extension number will be displayed. If the call originated from an external source instead, the trunk ID will be displayed instead.</p> <p>This channel name will be used for call control commands.</p>
channel2			string	The called channel. If the call is from an extension, the extension number will be displayed. If the call originated from an external

				<p>source instead, the trunk ID will be displayed instead.</p> <p>This channel name will be used for call control commands.</p>
callerid1			string	Calling number
callerid2			string	Called number
uniqueid1			string	Calling channel identifier
uniqueid2			string	Called channel identifier
bridge_time			string	Duration of the call starting from the time the call was answered.
name1			string	Caller's name
name2			string	Callee's name
bridge_id			string	Bridge ID
inbound_trunk_name			string	Name of the trunk used for the inbound call. If the call is outbound, this field will be empty.
outbound_trunk_name			string	Name of the trunk used for the outbound call. If the call is inbound, this field will be empty.
Failed response				
status		yes	int	Please see the error code list for more details.

listBridgedChannels

listUnBridgedChannels

The "listUnBridgedChannels" action allows users to list the unbridged channels.

Request

```
{
  "request": {
    "action": "listUnBridgedChannels",
    "cookie": "sid624909538-1574783406"
  }
}
```

○ **Response**

```
{
  "response":{
    "channel":[],
    "page":1,
    "total_item":0,
    "total_page":1
  },
  "status":0
}
```

Key Word	Value	Mandatory	Type	Note
Request parameter				
cookie		yes	string	Returned value after login. All requests must include this value. If no cookie is included, error code -6 will be returned.
Successful response				
status	0	yes	int	The response is successful, status is 0.
total_item			int	Current number of established calls.
page			int	Current page is on.
channel			Json array	Detailed list of currently established calls.
channel			string	<p>The calling channel. If the call is from an extension, the extension number will be displayed. If the call originated from an external source instead, the trunk ID will be displayed instead.</p> <p>This channel name will be used for call control commands.</p>
state			string	Channel status(Up, Ringing...)
service			string	Channel type(macro-dial, queue.....)
callername			string	Caller name
callernum			string	Caller number

connectednum			string	Connected number(when the channel is not bridged, displays)
connectedname			string	Connected name
alloc_time			string	Channel change time(the first one is channel establish time)
inbound_trunk_name			string	The name of trunk from where the unanswered incoming call originated.
outbound_trunk_name			string	The name of the trunk used for the unanswered outgoing call.
Failed response				
status		yes	int	Please see the error code list for more details.

listUnBridgedChannels

Hangup

The “Hangup” action allows users to end an active call.

Request

```
{
  "request":{
    "action":"Hangup",
    "channel":"PJSIP/4000-00000084",
    "cookie":"sid1926227010-1576858973"
  }
}
```

Response

```
{
  "response":{
    "need_apply":"yes"
  },
  "status":0
}
```

Key Word	Value	Mandatory	Type	Note
Request parameter				
cookie		yes	string	Returned value after login. All requests must include this value. If no cookie is included, error code -6 will be returned.

channel		yes	string	The channel of the call to hang up. This information can be obtained by using the listBridgeChannels command.
Successful response				
status	0	yes	int	The response is successful, status is 0.
Failed response				
status		yes	int	Please see the error code list for more details.

Hangup

Callbarge

The “Callbarge” action allows users to barge into an ongoing call.

Request

```
{
  "request":{
    "action":"callbarge ",
    "barge-exten":"4002",
    "channel":"PJSIP/4003-00000087",
    "cookie":"sid1926227010-1576858973",
    "exten":"4003" }
}
```

Response

```
{
  "response":{
    "need_apply":"yes"
  },
  "status":0
}
```

Key Word	Value	Mandatory	Type	Note
Request parameter				
cookie		yes	string	Returned value after login. All requests must include this value. If no cookie is included, error code -6 will be returned.
channel		yes	string	The channel to monitor
exten		yes	string	The extension that will monitor the call.

mode		yes	string	<ul style="list-style-type: none"> • Null: Only listen in on the call. No parties will be able to hear you. • W: Talk to the extension being monitored. The other party will not hear you. • B: Join in on the call. Both parties will be able to hear and talk to you.
barge-exten		yes	string	Specify whether to request permission from an extension before monitoring its call. Request permission: @1 Don't request permission: @0 Example: To request permission from extension 2002 permission to monitor its ongoing call, enter 2002@1
Successful response				
status	0	yes	int	The response is successful, status is 0.
Failed response				
status		yes	int	Please see the error code list for more details.

Callbarge

Mute

Mute the extension through this interface. That is, the remote party of the extension cannot hear the extension,

and the extension can hear the voice of the other party. To unmute, use the unmute interface. The extension

will also be automatically unmuted after the call ends.

Request

```
{
  "request": {
    "action": "mute",
    "cookie": "sid612583207-1551962142",
    "channel": "PJSIP/2000-00000013",
  }
}
```

Response

```
{
  "response": {},
  "status": 0
}
```

Key Word	Value	Mandatory	Type	Note
Request parameter				
cookie		yes	string	Returned value after login. All requests must include this value. If no cookie is included, error code -6 will be returned.
channel		yes	string	The channel to be muted
Successful response				
status	0	yes	int	The response is successful, status is 0.
Failed response				
status		yes	int	Please see the error code list for more details.

Mute

Unmute

Unmute muted calls through the API.

◦ Request

```
{
  "request": {
    "action": "unmute",
    "cookie": "sid612583207-1551962142",
    "channel": "PJSIP/2000-00000013",
  }
}
```

◦ Response

```
{
  "response": {},
  "status": 0
}
```

Key Word	Value	Mandatory	Type	Note
Request parameter				
cookie		yes	string	Returned value after login. All requests must include this value. If no cookie is included, error code -6 will be returned.

channel		yes	string	The channel to monitor
Successful response				
status	0	yes	int	The response is successful, status is 0.
Failed response				
status		yes	int	Please see the error code list for more details.

Unmute

Hold

This action allows users to hold the current call of the specified extension through this interface. Use unhold action if need to resume the call.

◦ Request

```
{
  "request": {
    "action": "hold",
    "cookie": "sid612583207-1551962142",
    "channel": "PJSIP/2000-00000013",
  }
}
```

◦ Response

```
{
  "response": {},
  "status": 0
}
```

Key Word	Value	Mandatory	Type	Note
Request parameter				
cookie		yes	string	Returned value after login. All requests must include this value. If no cookie is included, error code -6 will be returned.
channel		yes	string	The channel to hold. Users can obtain the channel number by using the listBridgeChannels command.
Successful response				
status	0	yes	int	The response is successful, status is 0.
Failed response				

status		yes	int	Please see the error code list for more details.
---------------	--	-----	-----	--

Hold

Unhold

This action allows users to Resume the held call.

Request

```
{
  "request": {
    "action": "unhold",
    "cookie": "sid612583207-1551962142",
    "channel": "PJSIP/2000-00000013",
  }
}
```

Response

```
{
  "response": {},
  "status": 0
}
```

Key Word	Value	Mandatory	Type	Note
Request parameter				
cookie		yes	string	Returned value after login. All requests must include this value. If no cookie is included, error code -6 will be returned.
channel		yes	string	The channel to resume a held call.
Successful response				
status	0	yes	int	The response is successful, status is 0.
Failed response				
status		yes	int	Please see the error code list for more details.

Unhold

DialExtension

This action allows users to dial a local extension.

Request

```
{
  "request":{
    "action":"dialExtension",
    "callee":"1002",
    "caller":"1005",
    "cookie":"sid2035575025-1556156494"
  }
}
```

o Response

```
{
  "response":{
    "need_apply":"no"
  },
  "status":0
}
```

Key Word	Value	Mandatory	Type	Note
Request parameter				
cookie		yes	string	Returned value after login. All requests must include this value. If no cookie is included, error code -6 will be returned.
caller		yes	string	Caller number
Successful response				
status	0	yes	int	The response is successful, status is 0.
need_apply	no	No	string	Whether “Apply” is required for the configuration to take effect
Failed response				
status		yes	int	Please see the error code list for more details.

DialExtension

DialOutbound

This application allows users to dial external numbers.

o Request

```
{
  "request":{
    "action":"dialOutbound",
    "outbound":"4002",
    "caller":"1005",
    "cookie":"sid2035575025-1556156494"
  }
}
```

o Response

```
{
  "request":{
    "action":"dialOutbound",
    "outbound":"4002",
    "caller":"1005",
    "cookie":"sid2035575025-1556156494"
  }
}
```

Key Word	Value	Mandatory	Type	Note
Request parameter				
cookie		yes	string	Returned value after login. All requests must include this value. If no cookie is included, error code -6 will be returned.
caller		yes	string	Caller number
outbound		yes	string	Callee number
Successful response				
status	0	yes	int	The response is successful, status is 0.
need_apply	no	No	string	Whether “Apply” is required for the configuration to take effect
Failed response				
status		yes	int	Please see the error code list for more details.

DialOutbound

CallTransfer

The action allows users to transfer an in-call number to another number.

o Request

```
{
  "request":{
    "action":"callTransfer",
    "channel":"PJSIP/1008-00000040",
    "extension":"1002",
    "cookie":"sid49474975-1556163431"
  }
}
```

◦ Response

```
{
  "response":{
    "need_apply":"no"
  },
  "status":0
}
```

Key Word	Value	Mandatory	Type	Note
Request parameter				
cookie		yes	string	Returned value after login. All requests must include this value. If no cookie is included, error code -6 will be returned.
channel		yes	string	The channel that initiates the transfer.
extension		yes	string	The transfer destination.
Successful response				
status	0	yes	int	The response is successful, status is 0.
Failed response				
status		yes	int	Please see the error code list for more details.

CallTransfer

TransferNumberInbound

This action allows users to transfer an external inbound call that is ringing or in a call to another extension.

◦ Request

```
{
  "request":{
    "action":"transferNumberInbound",
    "cookie":"sid1612261872-1556164651",
    "channel":"PJSIP/trunk_4-00000044",
    "callee":"1008"
  }
}
```

◦ Response

```
{
  "response":{
    "need_apply":"no"
  },
  "status":0
}
```

Key Word	Value	Mandatory	Type	Note
Request parameter				
cookie		yes	string	Returned value after login. All requests must include this value. If no cookie is included, error code -6 will be returned.
channel		yes	string	Channel of the inbound call.
callee		yes	string	The destination that the caller will be transferred to.
Successful response				
status	0	yes	int	The response is successful, status is 0.
Failed response				
status		yes	int	Please see the error code list for more details.

TransferNumberInbound

TransferNumberOutbound

This action allows users to transfer the caller of an unanswered or ongoing outbound call to another destination

◦ Request

```
{
  "request":{
    "action":"transferNumberOutbound",
    "cookie":"sid1612261872-1556164651",
    "channel":"PJSIP/1008-00000048",
    "outbound":"4002"
  }
}
```

o Response

```
{
  "response":{
    "need_apply":"no"
  },
  "status":0
}
```

Key Word	Value	Mandatory	Type	Note
Request parameter				
cookie		yes	string	Returned value after login. All requests must include this value. If no cookie is included, error code -6 will be returned.
channel		yes	string	Channel of the outbound call.
outbound		yes	string	The destination that the caller will be transferred to.
Successful response				
status	0	yes	int	The response is successful, status is 0.
Failed response				
status		yes	int	Please see the error code list for more details.

TransferNumberOutbound

DialIVR

This action allows users to dial another extension via IVR.

o Request

```
{
  "request":{
    "action":"dialIVR",
    "cookie":"sid806817679-1556171969",
    "caller":"1002",
    "ivrnumber":"7000"
  }
}
```

o Response

```
{
  "response":{
    "need_apply":"no"
  },
  "status":0
}
```

Key Word	Value	Mandatory	Type	Note
Request parameter				
cookie		yes	string	Returned value after login. All requests must include this value. If no cookie is included, error code -6 will be returned.
caller		yes	string	The internal extension that will be used to dial other extensions via the IVR specified for the ivrnumber parameter.
ivrnumber		yes	string	IVR number.
Successful response				
status	0	yes	int	The response is successful, status is 0.
Failed response				
status		yes	int	Please see the error code list for more details.

DialIVR

DialIVROutbound

This action will allow users to dial an external number via IVR.

o Request


```
{
  "request":{
    "action":"dialIVROutbound",
    "cookie":"sid806817679-1556171969",
    "outcaller":"4005",
    "ivrnumber":"7000"
  }
}
```

o Response

```
{
  "response":{
    "need_apply":"no"
  },
  "status":0
}
```

Key Word	Value	Mandatory	Type	Note
Request parameter				
cookie		yes	string	Returned value after login. All requests must include this value. If no cookie is included, error code -6 will be returned.
caller		yes	string	The internal extension that will be used to dial external numbers via the IVR specified for the ivrnumber parameter.
ivrnumber		yes	string	IVR number.
Successful response				
status	0	yes	int	The response is successful, status is 0.
Failed response				
status		yes	int	Please see the error code list for more details.

DialIVROutbound

DialQueue

This action allows users to dial into a queue's extension.

o Request

```
{
  "request":{
    "action":"dialQueue",
    "cookie":"sid1772490686-1556173837",
    "outcaller":"4005",
    "queue":"6500"
  }
}
```

◦ Response

```
{
  "response":{
    "need_apply":"no"
  },
  "status":0
}
```

Key Word	Value	Mandatory	Type	Note
Request parameter				
cookie		yes	string	Returned value after login. All requests must include this value. If no cookie is included, error code -6 will be returned.
outcaller		yes	string	Caller number (external extension)
queue		yes	string	Call Queue number
Successful response				
status	0	yes	int	The response is successful, status is 0.
Failed response				
status		yes	int	Please see the error code list for more details.

DialQueue

DialRinggroup

This action allows users to dial into a ring group's extension.

◦ Request

```
{
  "request":{
    "action":"dialRinggroup",
    "cookie":"sid1772490686-1556173837",
    "outcaller":"4005",
    "ringgroup":"6500"
  }
}
```

o Response

```
{
  "response":{
    "need_apply":"no"
  },
  "status":0
}
```

Key Word	Value	Mandatory	Type	Note
Request parameter				
cookie		yes	string	Returned value after login. All requests must include this value. If no cookie is included, error code -6 will be returned.
outcaller		yes	string	Caller number (external extension)
ringgroup		yes	string	Ring Group number
Successful response				
status	0	yes	int	The response is successful, status is 0.
Failed response				
status		yes	int	Please see the error code list for more details.

DialRinggroup

DialOutboundTwo

This action allows users to call between two external extensions.

o Request

```
{
  "request":{
    "action":"dialOutboundTwo",
    "cookie":"sid1772490686-1556173837",
    "outcaller":"4005",
    "outcallee":"1506"
  }
}
```

◦ Response

```
{
  "response":{
    "need_apply":"no"
  },
  "status":0
}
```

Key Word	Value	Mandatory	Type	Note
Request parameter				
cookie		yes	string	Returned value after login. All requests must include this value. If no cookie is included, error code -6 will be returned.
outcaller		yes	string	Caller number (external extension)
outcallee		yes	string	Callee number(external extension)
Successful response				
status	0	yes	int	The response is successful, status is 0.
Failed response				
status		yes	int	Please see the error code list for more details.

DialOutboundTwo

refuseCall

This action allows users to reject an inbound call and this is doable if the “Call Control option” is enabled in the UCM’s API Configuration page which gives a 3rd party service 10 seconds to manage incoming calls.

◦ Request

```
{
  "request": {
    "action": "refuseCall",
    "cookie": "sid612583207-1551962142",
    "channel": "PJSIP/2000-00000013"
  }
}
```

◦ Response

```
{
  "response": {},
  "status": 0
}
```

Key Word	Value	Mandatory	Type	Note
Request parameter				
cookie		yes	string	Returned value after login. All requests must include this value. If no cookie is included, error code -6 will be returned.
channel		yes	string	The channel of the call to be rejected.
Successful response				
status	0	yes	int	The response is successful, status is 0.
Failed response				
status		yes	int	Please see the error code list for more details.

refuseCall

AcceptCall

This action allows users to accept inbound calls, and this is doable if the “Call Control option” is enabled in the UCM’s API Configuration page which gives a 3rd party service 10 seconds to manage incoming calls.

◦ Request

```
{
  "request": {
    "action": "acceptCall",
    "cookie": "sid612583207-1551962142",
    "channel": "PJSIP/2000-00000013"
  }
}
```

◦ Response

```
{
  "response": {},
  "status": 0
}
```

Key Word	Value	Mandatory	Type	Note
Request parameter				
cookie		yes	string	Returned value after login. All requests must include this value. If no cookie is included, error code -6 will be returned.
channel		yes	string	The channel of the call to be accepted.
Successful response				
status	0	yes	int	The response is successful, status is 0.
Failed response				
status		yes	int	Please see the error code list for more details.

acceptCall

Call Queue

listQueue

The “listQueue” action will allow users to list the available call queues such as the queue’s name, the members, etc.

Note: The needed information, can be defined in the parameter “**options**”.

Request

```
{
  "request": {
    "action": "listQueue",
    "cookie": "sid226931826-1574694317",

    "options": "extension,queue_name,strategy,queue_chairmans,members"
    "sidx": "extension",
    "sord": "asc"
  }
}
```

Response

```

{
  "response":{
    "page":1,
    "queue":[
      {
        "extension":"6500",
        "members":null,
        "queue_chairmans":null,
        "queue_name":"Test",
        "strategy":"ringall"
      }
    ],
    "total_item":1,
    "total_page":1
  },
  "status":0
}

```

Key Word	Value	Mandatory	Type	Note
Request parameter				
cookie		yes	string	Returned value after login. All requests must include this value. If no cookie is included, error code -6 will be returned.
page		no	int	Get queue list by page number.
sord	acs,desc	no	string	Sorting method. acs stands for ascending, and desc stands for descending.
sidx		no	string	Sort according to the index.
options	extension, queue_name, strategy, queue_chairmans, members	no	string	Specifies the information to retrieve for each queue. If unspecified, all information will be retrieved.
Successful response				
status	0	yes	int	The response is successful, status is 0.
total_item		yes	int	Total number of items on the list
total_page		yes	int	Total pages of the list
page		yes	int	What page is on.
extension		no	int	Extension number.
queue_name		no	string	Queue name

strategy	ringall, linear, leastrecent, fewestcalls, random, memory	no	string	Strategy <ul style="list-style-type: none"> ● Ring All: Ring all available agents simultaneously until one agent answers. ● Linear: Ring agents in the specified order. ● Least Recent: Ring the agent who has been called the least recently. ● Fewest Calls: Ring the agent with the fewest completed calls. ● Random: Ring a random agent. ● Round Robin: Ring agents using round robin schedule with memory.
queue_chairmans		no	string	Queue chairman
members		yes	string	Queue agents
Failed response				
status		yes	int	Please see the error code list for more details.

listQueue

getQueue

The “getQueue” action allows users to get information about a specific call queue.

◦ Request

```
{
  "request": {
    "action": "getQueue",
    "cookie": "sid226931826-1574694317",
    "queue": "6500"
  }
}
```

◦ Response


```
{
  "response":{
    "queue":{
      "account":null,
      "account_el":null,
      "account_t":null,
      "account_v":null,
      "alertinfo":null,
      "announce_frequency":20,
      "announce_holdtime":"no",
      "announce_position":"no",
      "announcement":null,
      "announcement_el":null,
      "announcement_t":null,
      "announcement_v":null,
      "auto_record":"off",
      "autofill":"yes",
      "createid":"0",
      "custom_dates":null,
      "custom_months":null,
      "custom_prompt":null,
      "custom_welcome_prompt":null,
      "destination_type":"voicemail",
      "destination_type_el":"playsound",
      "destination_type_t":"hangup",
      "destination_type_v":"account",
      "destination_voice_enable":"no",
      "directory":null,
      "directory_el":null,
      "directory_t":null,
      "directory_v":null,
      "email":null,
      "enable_agent_login":"no",
      "enable_destination":"D",
      "enable_feature":"no",
      "enable_welcome":"no",
      "extension":"6500",
      "external_number":null,
      "external_number_el":null,
      "external_number_t":null,
      "external_number_v":null,
      "hasvoicemail":"no",
      "ivr":null,
      "ivr_el":null,
      "ivr_t":null,
      "ivr_v":null,
      "joinempty":"no",
      "leavewhenempty":"strict",
      "maxlen":0,
      "members":null,
      "musicclass":"default",
      "pagingtype":"once",
      "permission":"internal",
      "pin":null,
      "queue_chairman":null,
      "queue_chairmans":null,
      "queue_dest":null,
      "queue_dest_el":null,
      "queue_dest_t":null,
      "queue_dest_v":null,
      "queue_name":"Test",
      "queue_timeout":60,
      "queuesasvm":"no",
      "replace_caller_id":"no",
      "reporholdtime":"no",
      "retry":5,
      "ringgroup":null,
      "ringgroup_el":null,
      "ringgroup_t":null,
      "ringgroup_v":null,
      "ringtime":30,
      "schedule_clean_enable":"no",
      "starttime":null,
      "strategy":"ringall",
      "tmp":null,
      "tmp2":"6500",
```

```

        "vm_extension":null,
        "vm_extension_el":null,
        "vm_extension_t":null,
        "vm_extension_v":null,
        "vmgroup":null,
        "vmgroup_el":null,
        "vmgroup_t":null,
        "vmgroup_v":null,
        "vmsecret":null,
        "voice_prompt_time":60,
        "vq_callback_enable_timeout":"no",
        "vq_callback_timeout":60,
        "vq_mode":"periodic",
        "vq_outprefix":null,
        "vq_periodic":20,
        "vq_switch":"no",
        "waittime":null,
        "week_date":null,
        "wrapuptime":10
    }
},
"status":0
}

```

Key Word	Value	Mandatory	Type	Note
Request parameter				
cookie		yes	string	Returned value after login. All requests must include this value. If no cookie is included, error code -6 will be returned.
queue		no	string	Specific queue number
Successful response				
queue_name	0	yes	string	Queue name
musicclass		yes	string	The Music on Hold playlist used by the queue.
leavewhenempty		yes	string	<p>Configures whether to disconnect callers in queue based on agent status. There are three options:</p> <ul style="list-style-type: none"> ● Yes: Callers will be disconnected from queue if all agents are paused or unavailable. ● No: Callers will never be disconnected from queue. ● Strict (Default): Callers will be disconnected from the queue if there are no agents or if all agents are unavailable or paused.

joinempty		yes	string	<p>Configures whether callers can dial into a call queue with no agents. There are three options:</p> <ul style="list-style-type: none"> ● Yes: Callers can always dial into a queue even if it is empty. 2. No (Default): Callers cannot dial into a queue if all agents are unavailable or paused. ● Strict: Callers cannot dial into a queue if there are no agents or if all agents are unavailable or paused.
pin		no	string	<p>PIN for dynamic agent login. The suffix for dynamic agent login can be configured on the Agent Login page.</p>
ringtime		yes	string	<p>Ring time Configure the number of seconds to ring an agent. The minimum is 5.</p>
strategy	ringall, linear, leastrecent, fewestcalls, random, memory	yes	string	<p>Strategy</p> <ul style="list-style-type: none"> ● Ring All: Ring all available agents simultaneously until one agent answers. ● Linear: Ring agents in the specified order. ● Least Recent: Ring the agent who has been called the least recently. ● Fewest Calls: Ring the agent with the fewest completed calls. ● Random: Ring a random agent. ● Round Robin: Ring agents using round robin schedule with memory.
wrapuptime		yes	string	<p>Wrap-up time Configure the delay time (in seconds) after a completed call before a new call will ring. If set to 0, there will be no delay between call completion and a new call.</p>
maxlen		yes	string	<p>Max Queue Length Configure the maximum number of calls to be queued at once. This number does not include calls that have been connected to agents, only calls that are still in queue. When this maximum value is exceeded, the caller will hear a busy tone and be</p>

				forwarded to the configured failover destination. Default value is 0 (unlimited).
reportholdtime	yes, no	no	string	Report wait time If enabled, the wait time of the caller will be shown to the agent before establishing the call.
auto_record	all, external, internal, off	yes	string	Auto Record all: All incoming calls to this extension will be recorded. Off: This extension's calls will not be recorded. External: All external calls of the extension will be recorded. Internal: All internal calls of the extension will be recorded.
queue_timeout		yes	int	Max wait time Amount of time to keep a caller in queue before rerouting them to the timeout destination.
enable_feature	yes, no	no	string	Enable Feature Codes If enabled, call queue members can use feature codes to transfer, call park or disconnect calls.
alertinfo	none, ring1, ring2, ring3, ring4, ring5, ring6, ring7, ring8, ring9, ring10, Bellcore-dr1, Bellcore-dr2, Bellcore-dr3, Bellcore-dr4, Bellcore-dr5, custom	no	string	Alert-info When the extension is callee, the Alert-info header field specifies an alternative ring tone to the callee.
voice_prompt_time		no		Destination Prompt Cycle Configures the amount of time (in seconds) to pass before repeating the audio prompt specified in the custom_prompt parameter below to callers. During the prompt, users can press 1 to transfer to the queue's configured Destination Prompt destination. Valid

				range is 20-200. Default is 20 seconds.
custom_prompt		no	string	Custom prompt When playing a custom prompt, press 1 to enter the failover destination or continue waiting in queue.
retry		no	int	Retry time Configure the number of seconds to wait before ringing the next agent. The minimum is 1.
replace_caller_id	yes, no	no	string	Replace display name If enabled, the UCM will replace the caller CID name with Call Queue name.
queue_chairmans		no	string	Queue chairman
enable_agent_login	yes, no	no	string	Enable agent login Allows agent logins via 3rd party services. Warning: Enabling this will log out all dynamic agents.
vq_switch	yes, no	no	string	Enable Virtual Queue If enabled, virtual queue will be available for callers. Virtual queue allows callers to hang up the call while still maintaining their position in line. Callers will be called back when an agent is available to answer them.
vq_mode	yes, no	no	string	Virtual Queue Mode When in DTMF mode, press 2 to trigger virtual queue. When in timeout mode, virtual queue will be triggered when the configured Virtual Queue Period has passed.
vq_periodic		no	int	Virtual Queue Period When vq_mode is set to timeout mode and when callers have waited the configured amount time, they will automatically be entered into virtual queue.
vq_outprefix		no	string	Virtual Queue Outbound Prefix System will add this prefix to dialed numbers when calling back users.

announce_position	yes, no	no	string	Enable Position Announcement If enabled, the UCM will announce to callers their position in queue.
announce_frequency		no	int	Announcement Interval The time interval (in seconds) in which positions and estimated wait times will be announced to callers.
destination_type_t	playsound, account, voicemail, queue, ringgroup, vmgroup, ivr, external_number	no	string	Timeout Destination The destination that the call will be routed to if not answered within the configured queue wait time.
vm_extension_t		no	string	Timeout Destination – Voicemail Use this as reference for the other “max wait time destination options” commands below.
account_t		no	string	Max wait time-Destination-extension
vmgroup_t		no	string	Max wait time-Destination-voicemail group
ivr_t		no	string	Max wait time-Destination-IVR
ringgroup_t		no	string	Max wait time-Destination-Ring Group
queue_dest_t		no	string	Max wait time-Destination-queues
external_number_t		no	string	Max wait time-Destination-external number
destination_type_v	account, voicemail, queue, ringgroup, vmgroup, ivr, external_number	no	string	Destination Prompt Cycle-destination The caller will be prompted to follow steps and get redirected to the configured failover destination.
vm_extension_v		no	string	Destination Prompt Cycle-destination-voicemail
account_v		no	string	Destination Prompt Cycle-destination-extension

vmgroup_v		no	string	Destination Prompt Cycle-destination-voicemail group
ivr_v		no	string	Destination Prompt Cycle-destination-IVR
ringgroup_v		no	string	Destination Prompt Cycle-destination-Ring group
queue_dest_v		no	string	Destination Prompt Cycle-destination-queues
external_number_v		no	string	Destination Prompt Cycle-destination-external number
destination_voice_enable	Yes, no	no	string	Configure whether callers will be prompted to be rerouted to the configured Destination Prompt Cycle destination.
autofill	Yes, no	no		Configures the queue's call handling behavior. See the UCM user manual for more details. yes: Parallel call handling no: Serial call handling
destination_type_el	playsound, account, voicemail, queue, ringgroup, vmgroup, ivr, external_number	no	string	Failover Destination The destination that callers will be redirected to if the queue is empty or if all agents are unavailable.
vm_extension_el		no	string	Failover Destination-voicemail
account_el		no	string	Failover Destination-extension
vmgroup_el		no	string	Failover Destination-voicemail group
ivr_el		no	string	Failover Destination-IVR
ringgroup_el		no	string	Failover Destination-Ring group
queue_dest_el		no	string	Failover Destination-queues
external_number_el		no	string	Failover Destination-external number
vq_callback_enable_timeout	yes, no	no	string	Whether or not a timeout will be set for callers waiting in

ut				virtual queue. Upon timeout, callers will be disconnected from virtual queue.
vq_callback_timeout		no	int	The virtual queue timeout period.
announce_holdtime	yes, no	no	string	Enable Wait Time Announcement If enabled, the estimated wait time for the call to get answered will periodically be announced to the caller. Note: Wait time will not be announced if less than one minute.
enable_welcome	yes, no	no	string	Enable welcome prompt
custom_welcome_prompt		no	string	Custom welcome prompt
schedule_clear_enable	once, daily, week, month	no	string	Whether or not to enable periodic agent call count clearing.
extension		no	string	Extension number
starttime		no	string	The time to reset agent call count.
pagingtype	once, daily, week, month	no	string	How often to reset agent call count.
week_date	sun, mon, tue, wed, thu, fri, sat	no	string	The weekday to reset agent call count.
custom_months	jan, feb, mar, apr, may, jun, jul, aug, sep, oct, nov, dec	no	string	The month to reset agent call count.
custom_dates		no	string	The day of the month to reset agent call count.
members		no	string	Static agents
status		Yes	int	Successful response, status is 0
Failed response				
status	0	yes	int	Please see the error code list for more details.

updateQueue

The “updateQueue” action allows users to update an existing call queue.

Request

```
{
  "request": {
    "action": "updateQueue",
    "cookie": "sid225627296-1574851572",
    "members": "1001,1002,1003",
    "queue": "6502",
    "queue_name": "GStest"
  }
}
```

Response

```
{
  "response": {
    "need_apply": "yes"
  },
  "status": 0
}
```

Key Word	Value	Mandatory	Type	Note
Request parameter				
cookie		yes	string	Returned value after login. All requests must include this value. If no cookie is included, error code -6 will be returned.
queue		no	string	Specific queue number
Successful response				
queue_name	0	yes	string	Queue name
musicclass		yes	string	The Music on Hold playlist used by the queue.
leavewhenempty		yes	string	<p>Configures whether to disconnect callers in queue based on agent status. There are three options:</p> <ul style="list-style-type: none"> ● Yes: Callers will be disconnected from queue if all agents are paused or unavailable. ● No: Callers will never be disconnected from queue.

				<ul style="list-style-type: none"> ● Strict (Default): Callers will be disconnected from the queue if there are no agents or if all agents are unavailable or paused.
joinempty		yes	string	<p>Configures whether callers can dial into a call queue with no agents. There are three options:</p> <ul style="list-style-type: none"> ● Yes: Callers can always dial into a queue even if it is empty. 2. No (Default): Callers cannot dial into a queue if all agents are unavailable or paused. ● Strict: Callers cannot dial into a queue if there are no agents or if all agents are unavailable or paused.
pin		no	string	<p>PIN for dynamic agent login. The suffix for dynamic agent login can be configured on the Agent Login page.</p>
ringtime		yes	string	<p>Ring time Configure the number of seconds to ring an agent. The minimum is 5.</p>
strategy	ringall, linear, leastrecent, fewestcalls, random, memory	yes	string	<p>Strategy</p> <ul style="list-style-type: none"> ● Ring All: Ring all available agents simultaneously until one agent answers. ● Linear: Ring agents in the specified order. ● Least Recent: Ring the agent who has been called the least recently. ● Fewest Calls: Ring the agent with the fewest completed calls. ● Random: Ring a random agent. ● Round Robin: Ring agents using round robin schedule with memory.
wrapuptime		yes	string	<p>Wrap-up time Configure the delay time (in seconds) after a completed call before a new call will ring. If set to 0, there will be no delay between call completion and a new call.</p>
maxlen		yes	string	<p>Max Queue Length Configure the maximum number of calls to be queued at once. This number does not include calls that have been</p>

				connected to agents, only calls that are still in queue. When this maximum value is exceeded, the caller will hear a busy tone and be forwarded to the configured failover destination. Default value is 0 (unlimited).
reporholdtime	yes, no	no	string	Report wait time If enabled, the wait time of the caller will be shown to the agent before establishing the call.
auto_record	all, external, internal, off	yes	string	Auto Record all: All incoming calls to this extension will be recorded. Off: This extension's calls will not be recorded. External: All external calls of the extension will be recorded. Internal: All internal calls of the extension will be recorded.
queue_timeout		yes	int	Max wait time Amount of time to keep a caller in queue before rerouting them to the timeout destination.
enable_feature	yes, no	no	string	Enable Feature Codes If enabled, call queue members can use feature codes to transfer, call park or disconnect calls.
alertinfo	none, ring1, ring2, ring3, ring4, ring5, ring6, ring7, ring8, ring9, ring10, Bellcore-dr1, Bellcore-dr2, Bellcore-dr3, Bellcore-dr4, Bellcore-dr5, custom	no	string	Alert-info When the extension is callee, the Alert-info header field specifies an alternative ring tone to the callee.
voice_prompt_time		no		Destination Prompt Cycle Configures the amount of time (in seconds) to pass before repeating the audio

				prompt specified in the custom_prompt parameter below to callers. During the prompt, users can press 1 to transfer to the queue's configured Destination Prompt destination. Valid range is 20-200. Default is 20 seconds.
custom_prompt		no	string	Custom prompt When playing a custom prompt, press 1 to enter the failover destination or continue waiting in queue.
retry		no	int	Retry time Configure the number of seconds to wait before ringing the next agent. The minimum is 1.
replace_caller_id	yes, no	no	string	Replace display name If enabled, the UCM will replace the caller CID name with Call Queue name.
queue_chairmans		no	string	Queue chairman
enable_agent_login	yes, no	no	string	Enable agent login Allows agent logins via 3rd party services. Warning: Enabling this will log out all dynamic agents.
vq_switch	yes, no	no	string	Enable Virtual Queue If enabled, virtual queue will be available for callers. Virtual queue allows callers to hang up the call while still maintaining their position in line. Callers will be called back when an agent is available to answer them.
vq_mode	yes, no	no	string	Virtual Queue Mode When in DTMF mode, press 2 to trigger virtual queue. When in timeout mode, virtual queue will be triggered when the configured Virtual Queue Period has passed.
vq_periodic		no	int	Virtual Queue Period When vq_mode is set to timeout mode and when callers have waited the configured amount time, they will automatically be entered into virtual queue.

vq_outprefix		no	string	Virtual Queue Outbound Prefix System will add this prefix to dialed numbers when calling back users.
announce_position	yes, no	no	string	Enable Position Announcement If enabled, the UCM will announce to callers their position in queue.
announce_frequency		no	int	Announcement Interval The time interval (in seconds) in which positions and estimated wait times will be announced to callers.
destination_type_t	playsound, account, voicemail, queue, ringgroup, vmgroup, ivr, external_number	no	string	Timeout Destination The destination that the call will be routed to if not answered within the configured queue wait time.
vm_extension_t		no	string	Timeout Destination – Voicemail Use this as reference for the other “max wait time destination options” commands below.
account_t		no	string	Max wait time-Destination-extension
vmgroup_t		no	string	Max wait time-Destination-voicemail group
ivr_t		no	string	Max wait time-Destination-IVR
ringgroup_t		no	string	Max wait time-Destination-Ring Group
queue_dest_t		no	string	Max wait time-Destination-queues
external_number_t		no	string	Max wait time-Destination-external number
destination_type_v	account, voicemail, queue, ringgroup, vmgroup, ivr, external_number	no	string	Destination Prompt Cycle-destination The caller will be prompted to follow steps and get redirected to the configured failover destination.

vm_extension_v		no	string	Destination Prompt Cycle-destination-voicemail
account_v		no	string	Destination Prompt Cycle-destination-extension
vmgroup_v		no	string	Destination Prompt Cycle-destination-voicemail group
ivr_v		no	string	Destination Prompt Cycle-destination-IVR
ringgroup_v		no	string	Destination Prompt Cycle-destination-Ring group
queue_dest_v		no	string	Destination Prompt Cycle-destination-queues
external_number_v		no	string	Destination Prompt Cycle-destination-external number
destination_voice_enable	Yes, no	no	string	Configure whether callers will be prompted to be rerouted to the configured Destination Prompt Cycle destination.
autofill	Yes, no	no		Configures the queue's call handling behavior. See the UCM user manual for more details. yes: Parallel call handling no: Serial call handling
destination_type_el	playsound, account, voicemail, queue, ringgroup, vmgroup, ivr, external_number	no	string	Failover Destination The destination that callers will be redirected to if the queue is empty or if all agents are unavailable.
vm_extension_el		no	string	Failover Destination-voicemail
account_el		no	string	Failover Destination-extension
vmgroup_el		no	string	Failover Destination-voicemail group
ivr_el		no	string	Failover Destination-IVR
ringgroup_el		no	string	Failover Destination-Ring group
queue_dest_el		no	string	Failover Destination-queues

external_number_el		no	string	Failover Destination-external number
vq_callback_enable_timeout	yes, no	no	string	Whether or not a timeout will be set for callers waiting in virtual queue. Upon timeout, callers will be disconnected from virtual queue.
vq_callback_timeout		no	int	The virtual queue timeout period.
announce_holdtime	yes, no	no	string	Enable Wait Time Announcement If enabled, the estimated wait time for the call to get answered will periodically be announced to the caller. Note: Wait time will not be announced if less than one minute.
enable_welcome	yes, no	no	string	Enable welcome prompt
custom_welcome_prompt		no	string	Custom welcome prompt
schedule_clear_enable	once, daily, week, month	no	string	Whether or not to enable periodic agent call count clearing.
extension		no	string	Extension number
starttime		no	string	The time to reset agent call count.
pagingtype	once, daily, week, month	no	string	How often to reset agent call count.
week_date	sun, mon, tue, wed, thu, fri, sat	no	string	The weekday to reset agent call count.
custom_months	jan, feb, mar, apr, may, jun, jul, aug, sep, oct, nov, dec	no	string	The month to reset agent call count.
custom_dates		no	string	The day of the month to reset agent call count.
members		no	string	Static agents

Successful response				
status	0	Yes	int	Successful response, status is 0
need_apply	yes, no	Yes	string	Whether “Apply” is required for the configuration to take effect
Failed response				
status		yes	int	Please see the error code list for more details.

updateQueue

addQueue

The “addQueue” action will allow users to add a call queue.

Request

```
{
  "request":{
    "action":"addQueue",
    "cookie":"sid225627296-1574851572",
    "extension":"6502",
    "members":"1001,1002",
    "queue_chairmans":"1001",
    "queue_name":"test",
    "strategy":"ringall"
  }
}
```

Response

```
{
  "response":{
    "need_apply":"yes"
  },
  "status":0
}
```

Key Word	Value	Mandatory	Type	Note
Request parameter				
cookie		yes	string	Returned value after login. All requests must include this value. If no cookie is included, error code -6 will be returned.
queue_name	0	yes	string	Queue name
musicclass		yes	string	The Music on Hold playlist used by the queue.

leavewhenempty		yes	string	<p>Configures whether to disconnect callers in queue based on agent status. There are three options:</p> <ul style="list-style-type: none"> ● Yes: Callers will be disconnected from queue if all agents are paused or unavailable. ● No: Callers will never be disconnected from queue. ● Strict (Default): Callers will be disconnected from the queue if there are no agents or if all agents are unavailable or paused.
joinempty		yes	string	<p>Configures whether callers can dial into a call queue with no agents. There are three options:</p> <ul style="list-style-type: none"> ● Yes: Callers can always dial into a queue even if it is empty. 2. No (Default): Callers cannot dial into a queue if all agents are unavailable or paused. ● Strict: Callers cannot dial into a queue if there are no agents or if all agents are unavailable or paused.
pin		no	string	<p>PIN for dynamic agent login. The suffix for dynamic agent login can be configured on the Agent Login page.</p>
ringtime		yes	string	<p>Ring time Configure the number of seconds to ring an agent. The minimum is 5.</p>
strategy	ringall, linear, leastrecent, fewestcalls, random, memory	yes	string	<p>Strategy</p> <ul style="list-style-type: none"> ● Ring All: Ring all available agents simultaneously until one agent answers. ● Linear: Ring agents in the specified order. ● Least Recent: Ring the agent who has been called the least recently. ● Fewest Calls: Ring the agent with the fewest completed calls. ● Random: Ring a random agent. ● Round Robin: Ring agents using round robin schedule with memory.

wrapuptime		yes	string	<p>Wrap-up time</p> <p>Configure the delay time (in seconds) after a completed call before a new call will ring. If set to 0, there will be no delay between call completion and a new call.</p>
maxlen		yes	string	<p>Max Queue Length</p> <p>Configure the maximum number of calls to be queued at once. This number does not include calls that have been connected to agents, only calls that are still in queue. When this maximum value is exceeded, the caller will hear a busy tone and be forwarded to the configured failover destination. Default value is 0 (unlimited).</p>
reportholdtime	yes, no	no	string	<p>Report wait time</p> <p>If enabled, the wait time of the caller will be shown to the agent before establishing the call.</p>
auto_record	all, external, internal, off	yes	string	<p>Auto Record</p> <p>all: All incoming calls to this extension will be recorded.</p> <p>Off: This extension's calls will not be recorded.</p> <p>External: All external calls of the extension will be recorded.</p> <p>Internal: All internal calls of the extension will be recorded.</p>
queue_timeout		yes	int	<p>Max wait time</p> <p>Amount of time to keep a caller in queue before rerouting them to the timeout destination.</p>
enable_feature	yes, no	no	string	<p>Enable Feature Codes</p> <p>If enabled, call queue members can use feature codes to transfer, call park or disconnect calls.</p>
alertinfo	none, ring1, ring2, ring3, ring4, ring5, ring6, ring7, ring8, ring9, ring10, Bellcore-dr1, Bellcore-	no	string	<p>Alert-info</p> <p>When the extension is callee, the Alert-info header field specifies an alternative ring tone to the callee.</p>

	dr2, Bellcore- dr3, Bellcore- dr4, Bellcore- dr5, custom			
voice_prompt_time		no		Destination Prompt Cycle Configures the amount of time (in seconds) to pass before repeating the audio prompt specified in the custom_prompt parameter below to callers. During the prompt, users can press 1 to transfer to the queue's configured Destination Prompt destination. Valid range is 20-200. Default is 20 seconds.
custom_prompt		no	string	Custom prompt When playing a custom prompt, press 1 to enter the failover destination or continue waiting in queue.
retry		no	int	Retry time Configure the number of seconds to wait before ringing the next agent. The minimum is 1.
replace_caller_id	yes, no	no	string	Replace display name If enabled, the UCM will replace the caller CID name with Call Queue name.
queue_chairmans		no	string	Queue chairman
enable_agent_login	yes, no	no	string	Enable agent login Allows agent logins via 3rd party services. Warning: Enabling this will log out all dynamic agents.
vq_switch	yes, no	no	string	Enable Virtual Queue If enabled, virtual queue will be available for callers. Virtual queue allows callers to hang up the call while still maintaining their position in line. Callers will be called back when an agent is available to answer them.
vq_mode	yes, no	no	string	Virtual Queue Mode When in DTMF mode, press 2 to trigger virtual queue. When in timeout mode, virtual queue will be triggered

				when the configured Virtual Queue Period has passed.
vq_periodic		no	int	Virtual Queue Period When vq_mode is set to timeout mode and when callers have waited the configured amount time, they will automatically be entered into virtual queue.
vq_outprefix		no	string	Virtual Queue Outbound Prefix System will add this prefix to dialed numbers when calling back users.
announce_position	yes, no	no	string	Enable Position Announcement If enabled, the UCM will announce to callers their position in queue.
announce_frequency		no	int	Announcement Interval The time interval (in seconds) in which positions and estimated wait times will be announced to callers.
destination_type_t	playsound, account, voicemail, queue, ringgroup, vmgroup, ivr, external_number	no	string	Timeout Destination The destination that the call will be routed to if not answered within the configured queue wait time.
vm_extension_t		no	string	Timeout Destination – Voicemail Use this as reference for the other “max wait time destination options” commands below.
account_t		no	string	Max wait time-Destination-extension
vmgroup_t		no	string	Max wait time-Destination-voicemail group
ivr_t		no	string	Max wait time-Destination-IVR
ringgroup_t		no	string	Max wait time-Destination-Ring Group
queue_dest_t		no	string	Max wait time-Destination-queues
external_number_t		no	string	Max wait time-Destination-external number

destination_type_v	account, voicemail, queue, ringgroup, vmgroup, ivr, external_number	no	string	Destination Prompt Cycle-destination The caller will be prompted to follow steps and get redirected to the configured failover destination.
vm_extension_v		no	string	Destination Prompt Cycle-destination-voicemail
account_v		no	string	Destination Prompt Cycle-destination-extension
vmgroup_v		no	string	Destination Prompt Cycle-destination-voicemail group
ivr_v		no	string	Destination Prompt Cycle-destination-IVR
ringgroup_v		no	string	Destination Prompt Cycle-destination-Ring group
queue_dest_v		no	string	Destination Prompt Cycle-destination-queues
external_number_v		no	string	Destination Prompt Cycle-destination-external number
destination_voice_enable	Yes, no	no	string	Configure whether callers will be prompted to be rerouted to the configured Destination Prompt Cycle destination.
autofill	Yes, no	no		Configures the queue's call handling behavior. See the UCM user manual for more details. yes: Parallel call handling no: Serial call handling
destination_type_el	playsound , account, voicemail, queue, ringgroup, vmgroup, ivr, external_number	no	string	Failover Destination The destination that callers will be redirected to if the queue is empty or if all agents are unavailable.
vm_extension_el		no	string	Failover Destination-voicemail
account_el		no	string	Failover Destination-extension
vmgroup_el		no	string	Failover Destination-voicemail group

ivr_el		no	string	Failover Destination-IVR
ringgroup_el		no	string	Failover Destination-Ring group
queue_dest_el		no	string	Failover Destination-queues
external_number_el		no	string	Failover Destination-external number
vq_callback_enable_timeout	yes, no	no	string	Whether or not a timeout will be set for callers waiting in virtual queue. Upon timeout, callers will be disconnected from virtual queue.
vq_callback_timeout		no	int	The virtual queue timeout period.
announce_holdtime	yes, no	no	string	Enable Wait Time Announcement If enabled, the estimated wait time for the call to get answered will periodically be announced to the caller. Note: Wait time will not be announced if less than one minute.
enable_welcome	yes, no	no	string	Enable welcome prompt
custom_welcome_prompt		no	string	Custom welcome prompt
schedule_clear_enable	once, daily, week, month	no	string	Whether or not to enable periodic agent call count clearing.
starttime		no	string	The time to reset agent call count.
pagingtype	once, daily, week, month	no	string	How often to reset agent call count.
week_date	sun, mon, tue, wed, thu, fri, sat	no	string	The weekday to reset agent call count.
custom_months	jan, feb, mar, apr, may, jun, jul, aug, sep, oct, nov, dec	no	string	The month to reset agent call count.

custom_dates		no	string	The day of the month to reset agent call count.
members		no	string	Static agents
notification_prompt		no	string	Enter the filename of a custom audio prompt that was previously uploaded to the UCM, which will be played periodically to callers who are waiting in the queue.
notification_frequency	20-600	no	int	Configure the frequency in seconds in which to play the custom announcement to the callers in queue.
enable_vq_notification	yes, no	no	string	Choose whether or not to enable custom announcement for virtual queues.
Successful response				
status	0	Yes	int	Successful response, status is 0
need_apply	yes, no	Yes	string	Whether “Apply” is required for the configuration to take effect
Failed response				
status		yes	int	Please see the error code list for more details.

addQueue

deleteQueue

The “deleteQueue” allows users to delete an existing queue.

Request

```
{
  "request": {
    "action": "deleteQueue",
    "cookie": "sid1095249077-1574756325",
    "queue": "6502"
  }
}
```

Response

```
{
  "response": {
    "need_apply": "yes"
  },
  "status": 0
}
```

Key Word	Value	Mandatory	Type	Note
Request parameter				
cookie		yes	string	Returned value after login. All requests must include this value. If no cookie is included, error code -6 will be returned.
queue		yes	int	Queue number
Successful response				
status	0	yes	int	The response is successful, status is 0.
need_apply	Yes, no	yes	string	Whether “Apply” is required for the configuration to take effect.

deleteQueue

loginLogoffQueueAgent

The “loginLogoffQueueAgent” action allows users to log in or logoff static agents.

Request

```
{
  "request": {
    "action": "loginLogoffQueueAgent",
    "cookie": "sid1632521748-1574853548",
    "extension": "6502",
    "interface": "1001",
    "operatetype": "logoff"
  }
}
```

Response

```
{
  "response": {},
  "status": 0
}
```

Key Word	Value	Mandatory	Type	Note
Request parameter				
cookie		yes	string	Returned value after login. All requests must include this value. If no cookie is included, error code -6 will be returned.
operatetype	login ,	yes	string	Operation type

	logoff			
interface		yes	string	Agent number
extension		yes	string	Queue number
Successful response				
status	0	yes	int	The response is successful, status is 0.

loginLogoffQueueAgent

pauseUnpauseQueueAgent

The “pauseUnpauseQueueAgent” action allows users to pause or unpause static agents.

Request

```
{
  "request": {
    "action": "pauseUnpauseQueueAgent",
    "cookie": "sid1632521748-1574853548",
    "interface": "1002",
    "operatetype": "pause"
  }
}
```

Response

```
{
  "response": {
    "need_apply": "yes"
  },
  "status": 0
}
```

Key Word	Value	Mandatory	Type	Note
Request parameter				
cookie		yes	string	Returned value after login. All requests must include this value. If no cookie is included, error code -6 will be returned.
operatetype	pause, unpause	yes	string	Operation type
interface		yes	string	Agent number

extension		no	string	Queue number
Successful response				
status	0	yes	int	The response is successful, status is 0.
need_apply	yes, no	yes	string	Whether “Apply” is required for the configuration to take effect

pauseUnpauseQueueAgent

Queueapi

The “Queueapi” action allows users to get the Queue Statistics.

Request

```
{
  "request":{
    "action":"queueapi",
    "cookie":"sid1682729010-1574760528",
    "endTime":"2019-11-28",
    "startTime":"2019-11-27",
    "queue":"6500"           #If this line is not
specified, results return all available queues
  }
}
```

Response

```
<?xml version="1.0"?>
<root_statistics>
  <total>
    <queuechairman>admin</queuechairman>
    <total_calls>2</total_calls>
    <abandoned_rate>50.0</abandoned_rate>
    <avg_wait>2</avg_wait>
    <avg_talk>7</avg_talk>
    <vq_total_calls>0</vq_total_calls>
  </total>
  <queue>
    <queuechairman>admin</queuechairman>
    <queue>6500</queue>
    <total_calls>2</total_calls>
    <answered_calls>1</answered_calls>
    <answered_rate>50.0</answered_rate>
    <avg_wait>2</avg_wait>
    <avg_talk>7</avg_talk>
    <vq_total_calls>0</vq_total_calls>
  </queue>
  <agent>
    <queuechairman>admin</queuechairman>
    <agent>1004</agent>
    <total_calls>2</total_calls>
    <answered_calls>1</answered_calls>
    <answered_rate>50.0</answered_rate>
    <avg_talk>7</avg_talk>
  </agent>
</root_statistics>
```

Key Word	Value	Mandatory	Type	Note
----------	-------	-----------	------	------

Request parameter				
cookie		yes	string	Returned value after login. All requests must include this value. If no cookie is included, error code -6 will be returned.
format	csv, xml, json	no	string	Define output format of matching call queue statistics. Default is xml.
queuechairman	Admin, number	no	string	Queue chairman Default is admin
queue	Number, *	no	string	Queue number if queue number is *(default), all call queue information will be listed.
agent	Number, *	no	string	Agent number If agent number is *(default), all agent information will be listed.
statistics Type	overview, calldetail, loginhistory, pausedhistory,	no	string	overview: overview(default) calldetail: agent detail loginhistory: login record pausedhistory: pause log
numRecords	[0,1000]	no	int	Number of returned records Default is 1000, which is also the maximum allowed.
offset	number	no	int	The number of records that need to be skipped, use together with numRecords. Accept all records when multiple responses show up. Default is 0.
startTime	Date and/or time, format is YYYY-MM-DD	yes	int	Time range of call queue statistics, format is YYYY-MM-DD
Successful response				
Consistent with former cdrapi interface. Return corresponding content based on format.				
Failed response				
status		yes	int	Please see the error code list for more details.

Queueapi

Paging/Intercom

addPaginggroup

The "addPaginggroup" will allow users to add a paging group.

Request

```
{
  "request":{
    "action":"addPaginggroup",
    "cookie":"sid1095249077-1574756325",
    "extension":"8004",
    "members":"1000,1001,1002",
    "number_allowed":"1000",
    "paginggroup_name":"8004",
    "paginggroup_type":"1way"
  }
}
```

Response

```
{
  "response":{
    "need_apply":"yes"
  },
  "status":0
}
```

Key Word	Value	Mandatory	Type	Note
Request parameter				
cookie		yes	string	Returned value after login. All requests must include this value. If no cookie is included, error code -6 will be returned.
extension		yes	string	extension
paginggroup_name		yes	string	Paging group name
paginggroup_type	3way, 2way, 1way, announcement	yes	string	Type: <ul style="list-style-type: none">1way: 1-way paging2way: 2-way intercom3way: Multicast pagingannouncement: announcement paging
custom_prompt		no	string	Custom Prompt
replace_caller_id	yes, no	no	string	Replace Display Name If enabled, the UCM will replace the caller display name with Paging/Intercom name.
multicast_ip		no	string	Multicast IP Address The allowed multicast IP address range is 224.0.1.0 - 238.255.255.255.

multicast_port		no	int	port
limitime		no	int	Maximum Call Duration In seconds. Default is 0 means no limit.
custom_date		no	string	date
time		no	string	time, HH:MM
enable	yes, no	no	string	Enable. Whether to enable announcement paging.
members		no	string	Members that need paging/intercom
paginggroup		yes	string	Paging group number
old_multicast_ip		no	string	Multicast ip address set before The allowed multicast IP address range is 224.0.1.0 - 238.255.255.255.
old_multicast_port		no	string	Multicast port set before
number_allowed		no	string	Paging/Intercom Whitelist Only selected extensions will be able to initiate paging/intercom calls. If no extension is selected, all extensions will be able to initiate paging/intercom calls.
Successful response				
status		yes	int	The response is successful, status is 0.
need_apply	yes, no	yes	string	Whether “Apply” is required for the configuration to take effect
Failed response				
status		yes	int	Please see the error code list for more details.

addPaginggroup

listPaginggroup

The “listPaginggroup” allows users to list the existing paging group.

- **Request**

```
{
  "request":{
    "action":"listPaginggroup",
    "cookie":"sid1095249077-1574756325",
    "page":"1",
    "sidx":"extension",
    "sord":"asc"
  }
}
```

o Response

```
{
  "response":{
    "page":1,
    "paginggroup":[
      {
        "custom_date":"2018-08-01",
        "custom_prompt":null,
        "enable":"yes",
        "extension":"8004",
        "holiday":null,
        "limitime":0,
        "members":"1000,1001,1002",
        "multicast_ip":null,
        "multicast_port":null,
        "paginggroup_name":"8004",
        "paginggroup_type":"1way",
        "replace_caller_id":"no",
        "time":"00:00",
        "tmp":"8004"
      }
    ],
    "total_item":1,
    "total_page":1
  },
  "status":0
}
```

Key Word	Value	Mandatory	Type	Note
Request parameter				
cookie		yes	string	Returned value after login. All requests must include this value. If no cookie is included, error code -6 will be returned.
page		no		Get extension list by page number.
sord	acs,desc	no		Sorting method. acs stands for ascending, and desc stands for descending.
sidx		no		Sort according to the index.
item_num		no		Extension number on each page, which is, the maximum items of each return.

				If empty, all members are returned by default.
options	paginggroup_name, paginggroup_type, extension, custom_prompt, replace_caller_id, multicast_ip, multicast_port, limitime, custom_date, time, enable, members	no		Specify obtaining options. Multiple can be set, separated by commas. If empty, all options are returned by default.
Successful response				
status	0	yes	int	Total number of items on the list
total_item		yes	int	Total pages of the list
total_page		yes	int	What page is on.
page		yes	int	Extension number.
extension		no	string	extension
paginggroup_name		no	string	Paging group name
paginggroup_type	3way, 2way, 1way, announcement	no	string	Type: <ul style="list-style-type: none"> ● 1way: 1-way paging ● 2way: 2-way intercom ● 3way: Multicast paging ● announcement: announcement paging
custom_prompt		no	string	Custom Prompt
replace_caller_id	yes, no	no	string	Replace Display Name If enabled, the UCM will replace the caller display name with Paging/Intercom name.
multicast_ip		no	string	Multicast IP Address The allowed multicast IP address range is 224.0.1.0 - 238.255.255.255.

multicast_port		no	int	port
limitime		no	int	Maximum Call Duration In seconds. Default is 0 means no limit.
custom_date		no	string	date
time		no	string	Time in HH:MM format
enable	yes, no	no	string	Enable. Whether to enable announcement paging.
members		no	string	The members that will be paged.
Failed response				
status		yes	int	Please see the error code list for more details.

listPaginggroup

getPaginggroup

The “getPaginggroup” action allows users to get a specific paging group.

Request

```
{
  "request":{
    "action":"getPaginggroup",
    "cookie":"sid1095249077-1574756325",
    "paginggroup":"8004"
  }
}
```

Response


```

{
  "response":{
    "paginggroup":{
      "custom_date":"2018-08-01",
      "custom_prompt":null,
      "enable":"yes",
      "extension":"8004",
      "holiday":null,
      "limitime":0,
      "members":"1000,1001,1002",
      "multicast_ip":null,
      "multicast_port":null,
      "number_allowed":"1000",
      "paginggroup_name":"8004",
      "paginggroup_type":"1way",
      "replace_caller_id":"no",
      "time":"00:00",
      "tmp":"8004"
    }
  },
  "status":0
}

```

Key Word	Value	Mandatory	Type	Note
Request parameter				
cookie		yes	string	Returned value after login. All requests must include this value. If no cookie is included, error code -6 will be returned.
paginggroup		yes	string	Paging/intercom group number
Successful response				
status		yes	int	the response is successful, status is 0
extension		no	string	extension
paginggroup_name		no	string	Paging group name
paginggroup_type	3way, 2way, 1way, announcement	no	string	Type: <ul style="list-style-type: none"> ● 1way: 1-way paging ● 2way: 2-way intercom ● 3way: Multicast paging ● announcement: announcement paging
custom_prompt		no	string	Custom Prompt
replace_caller_id	yes, no	no	string	Replace Display Name If enabled, the UCM will replace the caller display name with Paging/Intercom name.

multicast_ip		no	string	Multicast IP Address The allowed multicast IP address range is 224.0.1.0 - 238.255.255.255.
multicast_port		no	int	port
limitime		no	int	Maximum Call Duration In seconds. Default is 0 means no limit.
custom_date		no	string	date
time		no	string	Time in HH:MM format
Failed response				
status		yes	int	Please see the error code list for more details.

getPaginggroup

updatePaginggroup

The “updatePaginggroup” action allows users to update an existing paging group.

Request

```
{
  "request":{
    "action":"updatePaginggroup",
    "cookie":"sid1381890074-1574854661",
    "members":"1003",
    "paginggroup":"8005",
    "paginggroup_type":"2way"
  }
}
```

Response

```
{
  "response":{
    "need_apply":"yes"
  },
  "status":0
}
```

Key Word	Value	Mandatory	Type	Note
Request parameter				

cookie		yes	string	Returned value after login. All requests must include this value. If no cookie is included, error code -6 will be returned.
extension		yes	string	extension
paginggroup_p_name		yes	string	Paging group name
paginggroup_p_type	3way, 2way, 1way, announcement	yes	string	Type: <ul style="list-style-type: none">● 1way: 1-way paging● 2way: 2-way intercom● 3way: Multicast paging● announcement: announcement paging
custom_prompt		no	string	Custom Prompt
replace_caller_id	yes, no	no	string	Replace Display Name If enabled, the UCM will replace the caller display name with Paging/Intercom name.
multicast_ip		no	string	Multicast IP Address The allowed multicast IP address range is 224.0.1.0 - 238.255.255.255.
multicast_port		no	int	port
limitime		no	int	Maximum Call Duration In seconds. Default is 0 means no limit.
custom_date		no	string	date
time		no	string	time, HH:MM
enable	yes, no	no	string	Enable. Whether to enable announcement paging.
members		no	string	Members that need paging/intercom
paginggroup_p		yes	string	Paging group number
old_multicast_ip		no	string	Multicast ip address set before The allowed multicast IP address range is 224.0.1.0 - 238.255.255.255.

old_multicast_port		no	string	Multicast port set before
number_allowed		no	string	Paging/Intercom Whitelist Only selected extensions will be able to initiate paging/intercom calls. If no extension is selected, all extensions will be able to initiate paging/intercom calls.
Successful response				
status		yes	int	The response is successful, status is 0.
need_apply	yes, no	yes	string	Whether “Apply” is required for the configuration to take effect
Failed response				
status		yes	int	Please see the error code list for more details.

updatePaginggroup

deletePaginggroup

The “deletePaginggroup” action allows users to delete an existing paging group.

Request

```
{
  "request":{
    "action":"deletePaginggroup",
    "cookie":"sid627603306-1574758858",
    "paginggroup":"8004"
  }
}
```

Response

```
{
  "response":{
    "need_apply":"yes"
  },
  "status":0
}
```

Key Word	Value	Mandatory	Type	Note
Request parameter				
cookie		yes	string	Returned value after login. All requests must include this value. If no cookie is included, error code -6 will be returned.

paginggroup		yes	string	Paging/intercom group number
Successful response				
status		yes	int	the response is successful, status is 0
need_apply	yes, no	yes	string	Whether “Apply” is required for the configuration to take effect
Failed response				
status		yes	int	Please see the error code list for more details.

deletePaginggroup

MulticastPaging

The “MulticastPaging” action allows users to initiate a multicast paging call.

◦ Request

```
{
  "request":{
    "action":"MulticastPaging",
    "caller":"1004",
    "cookie":"sid1381890074-1574854661",
    "pagingnum":"8005"
  }
}
```

◦ Response

```
{
  "response":{
    "need_apply":"yes"
  },
  "status":0
}
```

Key Word	Value	Mandatory	Type	Note
Request parameter				
cookie		yes	string	Returned value after login. All requests must include this value. If no cookie is included, error code -6 will be returned.
pagingnum		yes	string	Multicast paging number
caller		yes	string	The extension used to initiate the page.

Successful response				
status		yes	int	the response is successful, status is 0
need_apply	no	yes	string	Whether “Apply” is required for the configuration to take effect
Failed response				
status		yes	int	Please see the error code list for more details.

MulticastPaging

MulticastPagingHangup

The “MulticastPagingHangup” action allows users to hang up an ongoing multicast paging call.

o Request

```
{
  "request":{
    "action":"MulticastPagingHangup",
    "cookie":"sid1381890074-1574854661",
    "pagingnum":"8005"
  }
}
```

o Response

```
{
  "response":{
    "need_apply":"yes"
  },
  "status":0
}
```

Key Word	Value	Mandatory	Type	Note
Request parameter				
cookie		yes	string	Returned value after login. All requests must include this value. If no cookie is included, error code -6 will be returned.
pagingnum		yes	string	Multicast paging number
Successful response				
status		yes	int	the response is successful, status is 0

need_apply	no	yes	string	Whether “Apply” is required for the configuration to take effect
Failed response				
status		yes	int	Please see the error code list for more details.

MulticastPagingHangup

IVR

addIVR

The “addIVR” action allows users to add an IVR.

◦ Request

```
{
  "request":{
    "action":"addIVR",
    "alertinfo":"ring1",
    "cookie":"sid1682729010-1574760528",
    "dial_conference":"no",
    "dial_directory":"no",
    "dial_extension":"no",
    "dial_fax":"no",
    "dial_paginggroup":"no",
    "dial_queue":"no",
    "dial_ringgroup":"no",
    "dial_trunk":"yes",
    "dial_vmgroup":"no",
    "digit_timeout":3,
    "extension":"7000",
    "iloop":3,
    "invalid_prompt":"invalid",
    "ivr_blackwhite_list":"",
    "ivr_name":"7000",
    "ivr_out_blackwhite_list":"1000",
    "language":null,
    "members":[
      {
        "keypress":"i",
        "keypress_event":"member_prompt",
        "member_prompt":"goodbye"
      },
      {
        "keypress":"t",
        "keypress_event":"member_prompt",
        "member_prompt":"goodbye"
      }
    ],
    "permission":"internal-local",
    "replace_caller_id":"yes",
    "response_timeout":10,
    "switch":"no",
    "timeout_prompt":"ivr-create-timeout",
    "tloop":3,
    "welcome_prompt":"welcome"
  }
}
```

◦ Response

```
{
  "response":{
    "need_apply":"yes"
  },
  "status":0
}
```

Key Word	Value	Mandatory	Type	Note
Request parameter				
cookie		yes	string	Returned value after login. All requests must include this value. If no cookie is included, error code -6 will be returned.
ivr_name		yes	string	IVR Name
extension		yes	string	IVR number, the extension number of automatic voice reply.
welcome_prompt		yes	string	Prompt Initial tone that plays when the user enters the IVR.
response_timeout		yes	int	Response Timeout Timeout occurs when no DTMF entry is detected for the configured number of seconds after the IVR finishes playing the prompts.
digit_timeout		yes	int	Digit timeout After the user enters a digit, the user needs to enter the next digit within the timeout. If no digit is detected within the timeout, the PBX will consider the entries complete. The default timeout is 3 seconds.
timeout_prompt		yes	string	Response Timeout Prompt Play the selected prompt if response timeout occurs.
invalid_prompt		yes	string	Maximum calling period. In seconds, default is 0, which means unlimited.
tloop		yes	int	Response Timeout Prompt Repeats Number of times to repeat the prompt.

				After the final repeat, calls will be redirected to the Timeout destination (if configured) or dropped.
iloop		yes	int	Invalid Input Prompt Repeats Number of times to repeat the prompt. After the final repeat, calls will be redirected to the Invalid destination (if configured) or dropped.
dial_extension	yes, no	no	string	Dial Another Extensions-extension
dial_conference	yes, no	no	string	Dial Another Extensions-conference rooms
dial_queue	yes, no	no	string	Dial Another Extensions-queues
dial_ringgroup	yes, no	no	string	Dial Another Extensions-ring group
dial_vmgroup	yes, no	no	string	Dial Another Extensions-voicemail group
dial_paginggroup	yes, no	no	string	Dial Another Extensions-paging/intercom group
dial_fax	yes, no	no	string	Dial Another Extensions-fax
dial_trunk	yes, no	no	string	Dial trunk If enabled, users will be able to access trunks through this IVR. if using this feature, it is mandatory to configure permission.
dial_directory	yes, no	no	string	Dial Another Extensions-dial by name
permission	internal, internal-local, internal-local-national, internal-local-national-international	no	string	permission internal-internal internal-local-local internal-local-national-national internal-local-national-international-international
language		no	string	language
alertinfo	none, ring1, ring2, ring3,	no	string	Alert-info When present in an INVITE request, the Alert-info header

	ring4, ring5, ring6, ring7, ring8, ring9, ring10, Bellcore -dr1, Bellcore -dr2 Bellcore -dr3, Bellcore -dr4, Bellcore -dr5, custom			field specifies an alternative ring tone to the UAS.
replace_caller_id		no	string	Replace Display Name
switch	no white black	no	string	IVR Black/Whitelist Only whitelisted numbers and numbers not blacklisted can be called from the IVR.
ivr_blackwhitelist_list		no	string	Internal Black/Whitelist
ivr_out_blackwhite_list		no	string	External Blacklist/Whitelist Can be used only when Dial Trunk is enabled. Numbers will be added as follows: number1, number2, number3.
members		no	Json array	Key Pressing Events
Successful response				
status		yes	int	the response is successful, status is 0
need_apply	yes, no	yes	string	Whether “Apply” is required for the configuration to take effect
Failed response				
status		yes	int	Please see the error code list for more details.

addIVR

listIVR

The “listIVR” action allows users to list the available IVR.

◦ Request

```
{
  "request":{
    "action":"listIVR",
    "cookie":"sid1682729010-1574760528"
  }
}
```

o Response

```
{
  "response":{
    "ivr":[
      {
        "alertinfo":"ring1",
        "dial_conference":"no",
        "dial_directory":"no",
        "dial_extension":"no",
        "dial_failed_back2menu":"no",
        "dial_fax":"no",
        "dial_multimedia_conference":"no",
        "dial_paginggroup":"no",
        "dial_queue":"no",
        "dial_ringgroup":"no",
        "dial_trunk":"yes",
        "dial_vmgroup":"no",
        "digit_timeout":3,
        "extension":"7000",
        "iloop":3,
        "invalid_prompt":"invalid",
        "ivr_id":"ivr-1",
        "ivr_name":"7000",
        "language":null,
        "permission":"internal-local",
        "replace_caller_id":"yes",
        "response_timeout":10,
        "switch":"no",
        "timeout_prompt":"ivr-create-timeout",
        "tloop":3,
        "welcome_prompt":"welcome"
      }
    ],
    "page":1,
    "total_item":1,
    "total_page":1
  },
  "status":0
}
```

Key Word	Value	Mandat ory	Typ e	Note
Request parameter				
cookie		yes	string	Returned value after login. All requests must include this value. If no cookie is included, error code -6 will be returned.
page		no	int	Get extension list by page number.
sord	acs,desc	no	string	Sorting method. acs stands for ascending, and desc stands for descending.

sidx		no	string	Sort according to the index.
item_num		no	int	Extension number on each page, which is, the maximum items of each return. If empty, all members are returned by default.
options	ivr_id, ivr_name, extension, response_timeout, digit_timeout	no	string	Specify obtaining options. Multiple can be set, separated by commas. If empty, all options are returned by default.
Successful response				
status	0	yes	int	Successful response, status is 0
total_item		yes	int	Total pages of the list
total_page		yes	int	Total pages of the list
page		yes	int	What page is on.
ivr_id		no	string	IVR id
ivr_name		yes	string	IVR name
extension		yes	string	IVR number, the extension number of automatic voice reply.
custom_prompt		yes	string	Prompt The welcome prompt that plays when a caller dials into the IVR.
response_timeout		yes	int	Response Timeout The timeout that occurs when no DTMF input is detected for the configured number of seconds after an IVR prompt finishes playing.
digit_timeout		yes	int	Digit timeout The amount of time to enter each subsequent key after the first key entry. If no input is detected within the timeout period, the UCM will consider the entry complete. Default is 3 seconds.

timeout_prompt		yes	string	Response Timeout Prompt Play the selected prompt if response timeout occurs.
invalid_prompt		yes	string	Description doesn't match the parameter. Invalid Prompt Prompt that plays when invalid input is detected.
tloop		yes	int	Response Timeout Prompt Repeats Amount of times to repeat the response timeout prompt before redirecting the call to the timeout destination (if configured) or disconnecting the call.
iloop		yes	int	Invalid Input Prompt Repeats Number of times to repeat the invalid prompt before redirecting the call to the invalid destination (if configured) or disconnecting the call.
dial_extension	yes, no	no	string	Whether or not the IVR can dial regular extensions.
dial_conference	yes, no	no	string	Use previous comment as reference for the rest of the "dial_" parameters.
dial_queue	yes, no	no	string	Dial Other Extensions-queues
dial_ringgroup	yes, no	no	string	Dial Other Extensions-ring group
dial_vmgroup	yes, no	no	string	Dial Other Extensions-voicemail group
dial_paginggroup	yes, no	no	string	Dial Other Extensions-paging/intercom group
dial_fax	yes, no	no	string	Dial Other Extensions-fax
dial_trunk	yes, no	no	string	Dial trunk Whether or not the IVR can dial to trunks. If enabled, the IVR must have permission level configured.
dial_directory	yes, no	no	string	Dial Other Extensions-dial by name
permission	internal, internal-local,	no	string	permission internal-internal internal-local-local

	internal-local-national, internal-local-national-international			internal-local-national-national internal-local-national-international-international
language		no	string	language
alertinfo	none, ring1, ring2, ring3, ring4, ring5, ring6, ring7, ring8, ring9, ring10, Bellcore-dr1, Bellcore-dr2 Bellcore-dr3, Bellcore-dr4, Bellcore-dr5, custom	no	string	Alert-info When present in an INVITE request, the Alert-info header field specifies an alternative ring tone to the UAS.
replace_caller_id		no	string	Replace Display Name
switch	no white black	no	string	IVR Black/Whitelist white: Only numbers in the whitelist can access this IVR. black: Numbers in the blacklist cannot access the IVR.
Failed response				
status		yes	int	Please see the error code list for more details.

listIVR

getIVR

The “getIVR” action allows users to get information about a specific IVR.

Request

```
{
  "request":{
    "action":"getIVR",
    "cookie":"sid1682729010-1574760528",
    "ivr":"ivr-1"
  }
}
```

◦ Response

```
{
  "response":{
    "ivr":{
      "alertinfo":"ring1",
      "dial_conference":"no",
      "dial_directory":"no",
      "dial_extension":"no",
      "dial_failed_back2menu":"no",
      "dial_fax":"no",
      "dial_multimedia_conference":"no",
      "dial_paginggroup":"no",
      "dial_queue":"no",
      "dial_ringgroup":"no",
      "dial_trunk":"yes",
      "dial_vmgroup":"no",
      "digit_timeout":3,
      "extension":"7000",
      "iloop":3,
      "invalid_prompt":"invalid",
      "ivr_blackwhite_list":"",
      "ivr_id":"ivr-1",
      "ivr_name":"7000",
      "ivr_out_blackwhite_list":"1000",
      "language":null,
      "permission":"internal-local",
      "replace_caller_id":"yes",
      "response_timeout":10,
      "switch":"no",
      "timeout_prompt":"ivr-create-timeout",
      "tloop":3,
      "welcome_prompt":"welcome"
    },
    "members":[
      {
        "keypress":"i",
        "keypress_event":"member_prompt",
        "member_prompt":"goodbye"
      },
      {
        "keypress":"t",
        "keypress_event":"member_prompt",
        "member_prompt":"goodbye"
      }
    ]
  },
  "status":0
}
```

Key Word	Value	Manda tory	Typ e	Note
Request parameter				
cookie		yes	string	Returned value after login. All requests must include this value. If no cookie is included, error code -6 will be returned.
ivr		yes	string	IVR number
Successful response				
status	0	yes	int	Successful response, status is 0

ivr_id		no	string	IVR id
ivr_name		yes	string	IVR name
extension		yes	string	IVR number, the extension number of automatic voice reply.
welcome_prompt		yes	string	Prompt The welcome prompt that plays when a caller dials into the IVR.
response_timeout		yes	int	Response Timeout The timeout that occurs when no DTMF input is detected for the configured number of seconds after an IVR prompt finishes playing.
digit_timeout		yes	int	Digit timeout The amount of time to enter each subsequent key after the first key entry. If no input is detected within the timeout period, the UCM will consider the entry complete. Default is 3 seconds.
timeout_prompt		yes	string	Response Timeout Prompt Play the selected prompt if response timeout occurs.
invalid_prompt		yes	string	Description doesn't match the parameter. Invalid Prompt Prompt that plays when invalid input is detected.
tloop		yes	int	Response Timeout Prompt Repeats Amount of times to repeat the response timeout prompt before redirecting the call to the timeout destination (if configured) or disconnecting the call.
iloop		yes	int	Invalid Input Prompt Repeats Number of times to repeat the invalid prompt before redirecting the call to the invalid destination (if configured) or disconnecting the call.

dial_extensio n	yes, no	no	string	Whether or not the IVR can dial regular extensions.
dial_conferen ce	yes, no	no	string	Use previous comment as reference for the rest of the “dial_” parameters.
dial_queue	yes, no	no	string	Dial Other Extensions-queues
dial_ringgrou p	yes, no	no	string	Dial Other Extensions-ring group
dial_vmgroup p	yes, no	no	string	Dial Other Extensions-voicemail group
dial_paginggr oup	yes, no	no	string	Dial Other Extensions-paging/intercom group
dial_fax	yes, no	no	string	Dial Other Extensions-fax
dial_trunk	yes, no	no	string	Dial trunk Whether or not the IVR can dial to trunks. If enabled, the IVR must have permission level configured.
dial_director y	yes, no	no	string	Dial Other Extensions-dial by name
permission	internal, internal- local, internal- local- national, internal- local- national- international	no	string	permission internal-internal internal-local-local internal-local-national- national internal-local-national- international-international
language		no	string	language
alertinfo	none, ring1, ring2, ring3, ring4, ring5, ring6, ring7, ring8, ring9, ring10, Bellcore-dr1, Bellcore-dr2 Bellcore-dr3, Bellcore-dr4, Bellcore-dr5, custom	no	string	Alert-info When present in an INVITE request, the Alert-info header field specifies an alternative ring tone to the UAS.
replace_calle r_id		no	string	Replace Display Name

switch	no white black	no	string	IVR Black/Whitelist white: Only numbers in the whitelist can access this IVR. black: Numbers in the blacklist cannot access the IVR.
ivr_blackwhite_list		no	string	Internal Black/Whitelist
ivr_out_blackwhite_list		no	string	External Blacklist/Whitelist Can be used only when Dial Trunk is enabled. Numbers will be added as follows: number1, number2, number3.
members		no	Json array	Key Pressing Events
Failed response				
status		yes	int	Please see the error code list for more details.

getIVR

updateIVR

The “updateIVR” action allows users to update a specific IVR.

- **Request**

```

{
  "request":{
    "action":"updateIVR",
    "alertinfo":"ring2",
    "cookie":"sid1682729010-1574760528",
    "dial_conference":"no",
    "dial_directory":"no",
    "dial_extension":"no",
    "dial_failed_back2menu":"no",
    "dial_fax":"no",
    "dial_paginggroup":"no",
    "dial_queue":"no",
    "dial_ringgroup":"no",
    "dial_trunk":"yes",
    "dial_vmgroup":"no",
    "digit_timeout":"3",
    "extension":"7000",
    "iloop":"3",
    "invalid_prompt":"invalid",
    "ivr":"ivr-1",
    "ivr_name":"7000",
    "ivr_out_blackwhite_list":"1009",
    "permission":"internal-local",
    "replace_caller_id":"yes",
    "response_timeout":"10",
    "switch":"no",
    "timeout_prompt":"ivr-create-timeout",
    "tloop":"3",
    "welcome_prompt":"welcome"
  }
}

```

◦ Response

```

{
  "response":{
    "need_apply":"yes"
  },
  "status":0
}

```

Key Word	Value	Mandatory	Type	Note
Request parameter				
cookie		yes	string	Returned value after login. All requests must include this value. If no cookie is included, error code -6 will be returned.
ivr		yes	string	IVR number
ivr_name		yes	string	IVR Name
extension		yes	string	IVR number, the extension number of automatic voice reply.
welcome_prompt		yes	string	Prompt

				Initial tone that plays when the user enters the IVR.
response_timeout		yes	int	Response Timeout Timeout occurs when no DTMF entry is detected for the configured number of seconds after the IVR finishes playing the prompts.
digit_timeout		yes	int	Digit timeout After the user enters a digit, the user needs to enter the next digit within the timeout. If no digit is detected within the timeout, the PBX will consider the entries complete. The default timeout is 3 seconds.
timeout_prompt		yes	string	Response Timeout Prompt Play the selected prompt if response timeout occurs.
invalid_prompt		yes	string	Maximum calling period. In seconds, default is 0, which means unlimited.
tloop		yes	int	Response Timeout Prompt Repeats Number of times to repeat the prompt. After the final repeat, calls will be redirected to the Timeout destination (if configured) or dropped.
iloop		yes	int	Invalid Input Prompt Repeats Number of times to repeat the prompt. After the final repeat, calls will be redirected to the Invalid destination (if configured) or dropped.
dial_extension	yes, no	no	string	Dial Another Extensions-extension
dial_conference	yes, no	no	string	Dial Another Extensions-conference rooms
dial_queue	yes, no	no	string	Dial Another Extensions-queues

dial_ringgroup	yes, no	no	string	Dial Another Extensions-ring group
dial_vmgroup	yes, no	no	string	Dial Another Extensions-voicemail group
dial_paginggroup	yes, no	no	string	Dial Another Extensions-paging/intercom group
dial_fax	yes, no	no	string	Dial Another Extensions-fax
dial_trunk	yes, no	no	string	Dial trunk If enabled, users will be able to access trunks through this IVR. if using this feature, it is mandatory to configure permission.
dial_directory	yes, no	no	string	Dial Another Extensions-dial by name
permission	internal, internal-local, internal-local-national, internal-local-national-international	no	string	permission internal-internal internal-local-local internal-local-national-national internal-local-national-international-international
language		no	string	language
alertinfo	none, ring1, ring2, ring3, ring4, ring5, ring6, ring7, ring8, ring9, ring10, Bellcore-dr1, Bellcore-dr2 Bellcore-dr3, Bellcore-dr4, Bellcore-dr5, custom	no	string	Alert-info When present in an INVITE request, the Alert-info header field specifies an alternative ring tone to the UAS.
replace_caller_id		no	string	Replace Display Name
switch	no white black	no	string	IVR Black/Whitelist Only whitelisted numbers and numbers not blacklisted can be called from the IVR.
ivr_blackwhite_list		no	string	Internal Black/Whitelist

ivr_out_black white_list		no	string	External Blacklist/Whitelist Can be used only when Dial Trunk is enabled. Numbers will be added as follows: number1, number2, number3.
members		no	Json array	Key Pressing Events
Successful response				
status		yes	int	the response is successful, status is 0
need_apply	yes, no	yes	string	Whether “Apply” is required for the configuration to take effect
Failed response				
status		yes	int	Please see the error code list for more details.

updateIVR

deleteIVR

The “deleteIVR” action allows users to delete an existing IVR.

Request

```
{
  "request":{
    "action":"deleteIVR",
    "cookie":"sid1682729010-1574760528",
    "ivr":"ivr-1"
  }
}
```

Response

```
{
  "response":{
    "need_apply":"yes"
  },
  "status":0
}
```

Key Word	Value	Mandatory	Type	Note
Request parameter				
cookie		yes	string	Returned value after login. All requests must include this value. If no

				cookie is included, error code -6 will be returned.
ivr		yes	string	Talked to development team. This is the IVR index, not extension. Will be changed to IVR extension in the future.
Successful response				
status		yes	int	The response is successful, status is 0
need_apply	yes, no	yes	string	Whether “Apply” is required for the configuration to take effect
Failed response				
status		yes	int	Please see the error code list for more details.

deleteIVR

User Information

listUser

The “listUser” action allows users to get information about a user.

o Request

```
{
  "request": {
    "action": "listUser",
    "item_num": "10",
    "sidx": "extension",
    "sord": "asc",
    "page": "1",
    "cookie": "sid81747798-1551856142"
  }
}
```

o Response

```

{
  "response":{
    "user_id":[
      {
        "user_id":0,
        "user_name":"admin",
        "privilege":0,
        "department":null,
        "first_name":null,
        "last_name":null,
        "enable_multiple_extension":"no",
        "multiple_extension":null,
        "email":null,
        "language":null,
        "fax":null,
        "family_number":null,
        "phone_number":null,
        "cookie":"sid523099813-1555662509",
        "login_time":"2019-04-19 16:49:05",
        "email_to_user":"no",
        "ip":"192.168.129.55"
      },
      {
        "user_id":2,
        "user_name":"1083",
        "privilege":3,
        "department":null,
        "first_name":"aaa",
        "last_name":"aaa",
        "enable_multiple_extension":"no",
        "multiple_extension":null,
        "email":null,
        "language":null,
        "fax":null,
        "family_number":null,
        "phone_number":null,
        "cookie":null,
        "login_time":null,
        "email_to_user":"no",
        "ip":null
      },
      {
        "user_id":3,
        "user_name":"1084",
        "privilege":3,
        "department":null,
        "first_name":null,
        "last_name":null,
        "enable_multiple_extension":"no",
        "multiple_extension":null,
        "email":null,
        "language":null,
        "fax":null,
        "family_number":null,
        "phone_number":null,
        "cookie":null,
        "login_time":null,
        "email_to_user":"no",
        "ip":null
      }
    ],
    "total_item":3,
    "total_page":1,
    "page":1
  },
  "status":0
}

```

Key Word	Value	Mandat ory	Typ e	Note
----------	-------	---------------	----------	------

Request parameter				
cookie		yes	string	Returned value after login. All requests must include this value. If no cookie is included, error code -6 will be returned.
page		no	int	Get extension list by page number.
sord	acs,desc	no	string	Sorting method. acs stands for ascending, and desc stands for descending.
sidx		no	string	Sort according to the index.
item_num		no	int	Extension number on each page, which is, the maximum items of each return. If empty, all members are returned by default.
options	department, first_name, last_name, email, language, fax, family_number, phone_number, login_time, ip	no	string	Specify obtaining options. Multiple can be set, separated by commas. If empty, all options are returned by default.
Successful response				
status	0	yes	int	Successful response, status is 0
total_item		yes	int	Total number of items on the list
total_page		yes	int	Total pages of the list
page		yes	int	What page is on.
user_id		no	int	User id
user_name		yes	string	User name
privilege		yes	int	The privilege level granted to the user.
department		yes	string	The department that the user belongs to.

first_name		yes	string	First name of the user
last_name		yes	string	Last name of the user
email		yes	string	Email address of the user. For example, "bobjones@bobjones.null".
language		yes	string	Language The language that the user will hear voice prompts in. "default" uses the language of global settings.
fax		yes	string	Fax number of the user.
family_number		yes	string	User family number
phone_number		yes	string	User phone number
login_time		yes	string	Last login time
ip		yes	string	IP address of the user.
Failed response				
status		yes	int	Please see the error code list for more details.

listUser

getUser

The "getUser" action allows users to obtain the user's configuration.

Request

```
{
  "request": {
    "action": "getUser",
    "user_name": "1083",
    "cookie": "sid81747798-1551856142"
  }
}
```

Response

```

{
    "response":{
        "user_name":{
            "login_time":null,
            "cookie":null,
            "phone_number":"18373710740",
            "family_number":"8888",
            "fax":"123",
            "language":"en",
            "email":"2453034231@gmail.com",
            "multiple_extension":null,
            "enable_multiple_extension":"no",
            "email_to_user":"yes",
            "last_name":"John",
            "first_name":"Doe",
            "department":"Documentation",
            "privilege":3,
            "user_id":2
        }
    },
    "status":0
}

```

Key Word	Value	Mandatory	Type	Note
Request parameter				
cookie		yes	string	Returned value after login. All requests must include this value. If no cookie is included, error code -6 will be returned.
user_name		yes	string	username
Successful response				
status	0	yes	int	Successful response, status is 0
phone_number		yes	string	User phone number
family_number		yes	string	User family phone number
fax		yes	string	User fax
language		yes	string	Language Language of voice prompt. “default” uses the language of global settings.
email		yes	string	The Email address of this user. For example, "bobjones@bobjones.null".
last_name		yes	string	The last Name of the user.

first_name		yes	string	The first Name of the user.
department		yes	string	The Department that the user belongs to
privilege		yes	int	The privilege level granted to the user.
user_id		yes	int	User id
Failed response				
status		yes	int	Please see the error code list for more details.

getUser

updateUser

The "updateUser" action allows users to update a user.

o Request

```
{
  "request":{
    "user_name":"1083",
    "department":"R&D department 2",
    "fax":"123",
    "email":"gangwang@grandstream.cn",
    "first_name":"aaa",
    "last_name":"aaa",
    "family_number":"8888",
    "phone_number":"18373710740",
    "privilege":"3",
    "action":"updateUser",
    "user_id":"2"
  }
}
```

o Response

```
{
  "response":{
    "need_apply":"yes"
  },
  "status":0
}
```

Key Word	Value	Mandatory	Type	Note
Request parameter				
cookie		yes	string	Returned value after login. All requests must include this value. If no cookie is included, error code -6 will be returned.

user_name		yes	string	username
phone_number		yes	string	User phone number
family_number		yes	string	User family phone number
fax		yes	string	User fax
email		yes	string	The Email address of this user. For example, "bobjones@bobjones.null".
last_name		yes	string	The last Name of the user.
first_name		yes	string	The first Name of the user.
department		yes	string	The Department that the user belongs to
Privilege		yes	Int	The privilege level granted to the user.
user_id		yes	int	User id
Successful response				
status		yes	int	The response is successful, status is 0
need_apply	yes, no	yes	string	Whether “Apply” is required for the configuration to take effect
Failed response				
status		yes	int	Please see the error code list for more details.

updateUser

Extension Groups

listExtensionGroup

The “listExtensionGroup” action allows users to list extension groups.

Request

```
{
  "request": {
    "action": "listExtensionGroup",
    "item_num": "10",
    "sidx": "group_name",
    "sord": "asc",
    "page": "1",
    "cookie": "sid81747798-1551856142"
  }
}
```

o Response

```
{
  "response": {
    "extension_group": [
      {
        "group_id": "group-3",
        "group_name": "1083",
        "members": "1083",
        "tmp": "group-3"
      },
      {
        "group_id": "group-2",
        "group_name": "45",
        "members": "1083,1084",
        "tmp": "group-2"
      },
      {
        "group_id": "group-1",
        "group_name": "ew",
        "members": null,
        "tmp": null
      }
    ],
    "total_item": 3,
    "total_page": 1,
    "page": 1
  },
  "status": 0
}
```

Key Word	Value	Mandator y	Type	Note
Request parameter				
cookie		yes	string	Returned value after login. All requests must include this value. If no cookie is included, error code -6 will be returned.
page		no	int	username
sord	acs,desc	no	string	User phone number
sidx		no	string	User family phone number
item_num		no	int	User fax

options	group_name, members, group_id	no	string	The Email address of this user. For example, "bobjones@bobjones.null".
Successful response				
status		yes	int	The response is successful, status is 0
total_item	yes, no	yes	int	Whether “Apply” is required for the configuration to take effect
total_page		yes	int	Total pages of the list
page		yes	int	What page is on.
group_id		no	int	Group id
group_name		yes	string	Group name
members		yes	int	Extensions in the group
Failed response				
status		yes	int	Please see the error code list for more details.

listExtensionGroup

PIN Groups

listPinSets

The “listPinSets” action allows users to list the available PIN groups.

Request

```
{
  "request": {
    "action": "listPinSets",
    "item_num": "10",
    "sidx": "pin_sets_id",
    "sord": "asc",
    "page": "1",
    "cookie": "sid81747798-1551856142"
  }
}
```

Response

```

{
    "response":{
        "pin_sets_id":[
            {
                "pin_sets_id":"1557210434090",
                "pin_sets_name":"hehe",
                "record_in_cdr":"no"
            },
            {
                "pin_sets_id":"1557210889523",
                "pin_sets_name":"kp",
                "record_in_cdr":"no"
            }
        ],
        "total_item":2,
        "total_page":1,
        "page":1
    },
    "status":0
}

```

Key Word	Value	Mandatory	Type	Note
Request parameter				
cookie		yes	string	Returned value after login. All requests must include this value. If no cookie is included, error code -6 will be returned.
page		no	int	username
sord	acs,desc	no	string	User phone number
sidx		no	string	User family phone number
item_num		no	int	User fax
options	group_name, members, group_id	no	string	The Email address of this user. For example, "bobjones@bobjones.null".
Successful response				
status		yes	int	The response is successful, status is 0
total_item	yes, no	yes	int	Whether “Apply” is required for the configuration to take effect
total_page		yes	int	Total pages of the list
page		yes	int	What page is on.

pin_sets_id		no	int	ID of the PIN set
pin_sets_name		yes	string	Name of the PIN set
record_in_cdr		yes	string	Whether to record in CDR
Failed response				
status		yes	int	Please see the error code list for more details.

listPinSets

cdraapi

The “cdraapi” action allows users to get the CDR database.

◦ Request

```
{
  "request": {
    "action": "cdraapi",
    "cookie": "sid1381890074-1574854661",
    "format": "json"
  }
}
```

◦ Response

```

{
  "cdr_root": [
    {
      "AcctId": "1",
      "accountcode": "",
      "action_owner": "1004",
      "action_type": "PAGE[8005]",
      "amaflags": "DOCUMENTATION",
      "answer": "2019-11-27 07:17:13",
      "billsec": "1",
      "caller_name": "1004",
      "cdr": "1574857028274003-1004",
      "chanext": "",
      "channel": "PJSIP/1004-00000010",
      "channel_ext": "1004",
      "clid": "\"1004\" <1004>",
      "dcontext": "pagegroups",
      "disposition": "ANSWERED",
      "dst": "8005",
      "dst_trunk_name": "",
      "dstanswer": "8005",
      "dstchanext": "",
      "dstchannel": "MulticastRTP/0x47e2650c",
      "dstchannel_ext": "0x47e2650c",
      "duration": "6",
      "end": "2019-11-27 07:17:14",
      "lastapp": "Dial",

      "lastdata": "MulticastRTP/basic/224.0.1.2:8080,10,zA() ",
      "recordfiles": "",
      "service": "p",
      "session": "1574857028274003-1004",
      "src": "1004",
      "src_trunk_name": "",
      "start": "2019-11-27 07:17:08",
      "uniqueid": "1574857028.56",
      "userfield": "Internal"
    }
  ]
}

```

Key Word	Value	Mandatory	Type	Note
Request parameter				
cookie		yes	string	Returned value after login. All requests must include this value. If no cookie is included, error code -6 will be returned.
format	csv, xml, json	no	int	username
numRecords	[0,1000]	no	string	User phone number
offset	number	no	string	User family phone number
caller	Extension separated by comma, extension range, caller regular expression	no	string	The filter can find call records that match the input parameter, based on source (caller) number or destination (callee) number.

				<p>A format including wildcard ('@' or '_') will be treated as regular expression. '-' is treated as range symbol rather than hyphen; '@' represents characters of any digit(including 0); '_' represents one character.</p> <p>Otherwise, digits including a hyphen will be recognized as an extension segment, non-numeric characters or characters including multiple hyphens will be ignored</p> <p>0-0 matches all non-numeric string and null string.</p> <p>For example, caller=5300,5302-5304,_4@-or- caller=5300&caller=5302-5304&caller=_4@ (matches extension 5300. 5302, 5303, 5304 and any extension of which the</p>
callee				
startTime	<p>Date and /or time, format is as follows:</p> <p>YYYY-MM-DDTHH:MM</p> <p>YYYY-MM-DDTHH:MM:S</p> <p>S</p> <p>YYYY-MM-DDTHH:MM:S</p> <p>S.SSS</p> <p>('T' is the separator of the 3 formats)</p> <p>HH:MM</p> <p>HH:MM:SS</p> <p>HH:MM:SS.SS</p> <p>S</p>	yes	int	<p>second digit is 4.)</p> <p>Filter is based on value of starting time. It matches calls start time in this period, despite the time of answering or hangup.</p> <p>If null, there is no limitation of minimum and maximum start time.</p> <p>If date is null, the default date is 2000-01-01;</p> <p>If time is null, the default time is 0:00 UTC.</p> <p>String including time could also specify a time zone, use '%2B' to replace the '+' in timezone. (See detail in http://www.w3.org/TR/NOTE-datetime)</p>
endTime				
minDur	Number(in seconds)	no	int	Filter is based on call duration.
maxDur				
answered by		no	string	callee
timeFilter Type	Start, End	no	string	
callerName		no	string	
delete		no	string	Delete CDR records
Successful response				

Consistent with former cdrapi interface. Return corresponding content based on format.				
Failed response				
status		yes	int	Please see the error code list for more details.

cdrapi

For more details regarding parameters to use in the request please refer to:

<https://documentation.grandstream.com/knowledge-base/cdr-rec-api/>

Recapi

Local Files

The “recapi” action allows users to download the wanted audio file.

Request

```
{
  "request": {
    "action": "recapi",
    "cookie": "sid1381890074-1574854661",
    "filedir": "monitor",
    "filename": "auto-1574857256-1003-1004.wav"
  }
}
```

Response

Once successful, it will prompt you to choose a location to save the downloaded file.

Key Word	Value	Mandatory	Type	Note
Request parameter				
cookie		yes	string	Returned value after login. All requests must include this value. If no cookie is included, error code -6 will be returned.
filedir	monitor, emergency meetme, queue, sca	no	string	Which type of record file to obtain. Multiple can be separated commas. If filename and filedir are null at the same time, the supported filedir list will be returned. If only filename is set, filedir is set to monitor as default.

filename		no	string	If only filedir is set, all csv files of the corresponding type will be returned. When multiple files are downloaded, they are separated bt commas.
Successful response				
Consistent with former cdrapi interface. Return corresponding content based on format.				
Failed response				
Consistent with original recapit interface. Error description.				

Recapi

GDMS and NAS Files

To retrieve recording files that are stored on GDMS and NAS files use the following parameters and values:

Key Word	Value	Mandatory	Type	Note
Request Parameter				
Cookie		yes	string	Returned value after logging in. All request must include this value. If no co

				o ki e is in cl u de d, er ro r co de -6 w ill be re tu rn ed .
Filedir	monitor, emergencyme tme, queue, sca	no	string	W hi ch ty pe of re co rd fil e to o bt ai n. M ul ti pl e ca n be se pa ra te d co m m as . If fil en a m e an d fil ed ir

				are en- u- l- at th- e sa- m- e ti- m- e, th- e su- p- p- or- te- d fil- ed ir- lis- t w- ill be re- tu- rn- ed . If o- nl- y fil- en- a- m- e is se- t, fil- ed ir- is se- t to m- o- ni- to- r as de- fa- ul- t.
gdms_date		no	string	En- ter th

				e re co rd in g da te . If th e pa ra m et er is n ot in cl u de d in th e re q ue st, th e va lu e "t hi s m o nt h" w ill be us ed .
gdms_item_number		no	integer	E nt er th e m ax n u m be r of re co rd in gs

				to vi e w /r et ri ev e. If th e pa ra m et er is n ot in cl u de d in th e re q ue st, th e va lu e 2 0 w ill be us ed .
gdms_page		no	Integer	E nt er th e n u m be r of pa ge s of re co rd in gs y o u

				w an t to vi e w /r et ri ev e. If th e pa ra m et er is n ot in cl u de d in th e re q ue st, th e va lu e re q ue st ed w ill be 1.
path_type	gdms, netdisk	yes	string	E nt er th e lo ca ti o n of th e re co rd in gs to

				view /retriev e infor mation from "gdms" indicates gdms cloud platform form "netdisk" indicates NAS.
--	--	--	--	---

◦ **Get Request**

```
{
  "request":{
    "action":"recapi",
    "cookie":"sid173710538-1681394925",
    "filedir":"monitor",
    "gdms_date":"2023-04",
    "gdms_item_number":"20",
    "gdms_page":"1",
    "path_type":"gdms"
  }
}
```

- **Get Response**

```
-----  
Directory,Filename,uniqueCode  
monitor,auto-1680780504-2015-  
2002.venc,18831795fad74300a949bc353fa91f65  
monitor,auto-1680780501-2015-  
2002.venc,9c2d11eadb6c41089b16647c721ce50e  
monitor,auto-1680779629-2015-  
2002.venc,0b38ccfcad934ae6b11503c33915d5b1  
monitor,auto-1680779623-2015-  
2002.venc,d0dbc060a4f84c81a976c5c90fb0e778
```

- **Download Request**

```
{  
  "request":{  
    "action":"recapi",  
    "cookie":"sid2044000962-1681399117",  
    "filedir":"monitor",  
    "filename":"auto-1680779623-2015-2002.venc",  
    "path_type":"gdms",  
    "uniquecode":"d0dbc060a4f84c81a976c5c90fb0e778"  
  }  
}
```

Downloading from NAS is similar and would only require changing the path_type to "netdisk".

- **Get Request**

```
{  
  "request":{  
    "action":"recapi",  
    "cookie":"sid173710538-1681394925",  
    "filedir":"monitor",  
    "path_type":"netdisk"  
  }  
}
```

For more details regarding parameters to use in the request please refer to:

<https://documentation.grandstream.com/knowledge-base/cdr-rec-api/>

getRecordInfosByCall

The "getRecordInfosByCall" allows the user to retrieve the names of the recording files.

- **Request**

```
{  
  "request":{  
    "action":"getRecordInfosByCall",  
    "id":"2",  
    "cookie":"sid348153148-1729096598"  
  }  
}
```

- **Response**

```
{
  "response": {
    "recordfiles": "2024-10/auto-1526845607-1003-1005.wav,2024-10/auto-1526845833-1003-1005.wav"
  },
  "status": 0
}
```

Parameter	Supported Values	Required	Type	Note
cookie		yes	string	Required by almost all requests. Cookie value is generated after a successful login. Without a valid cookie, error code -6 will be returned.
id		yes	string	The id of the CDR entry with the recording. Which is the "AcctId" field from the returned cdrapi action. Users can filter the cdrapi by time to simplify the search as such: { "request": { "action": "cdrapi", "cookie": "sid28003956-1731578210", "endTime": "2024-11-14T11:00:00", "startTime": "2024-11-14T10:00:00", "format": "json" } }

getRecordInfosByCall

Pmsapi

The “pmsapi” action allows users to configure PMS actions such as Checkin, checkout, etc.

Check-in

◦ Request

```
{
  "request": {
    "action": "pmsapi",
    "cookie": "sid992645785-1575025577",
    "data": "<pms_data_request>
      <checkin>
        <address>1001</address>
        <room>1001</room>
      <account>1001</account>
      <firstname>John</firstname>
      <lastname>Doe</lastname>
      <language>EN</language>
      <vipcode>2</vipcode>
      <datein>2021/01/01 10:00</datein>
      <dateout>2021/01/07 11:00</dateout>
      <credit>9999900</credit>
      <cos>3</cos>
    </checkin>
  </pms_data_request>",
    "format": "xml",
    "token": "16c4a7b1fe890f89c8908f3f522fc18f"
  }
}
```

○ **Response**

```
{
  "response": {},
  "status": 0
}
```

Key Word	Value	Mandatory	Type	Note
Request parameter				
cookie		yes	string	Returned value after login. All requests must include this value. If no cookie is included, error code -6 will be returned.
token		no	string	String consists of PMS username and password after md5 encryption.
data	xml, json	yes	string	<p>Type of data string String in xml or json format:</p> <p>----- xml -----</p> <pre><pms_data_request> <checkin> <address>1000</address> <room>100</room> <account>123456</account> <firstname>John</firstname> <lastname>Doc</lastname> <language>EN</language> <vipcode>2</vipcode> <datein>2010/01/01 10:00</datein> <dateout>2010/01/07 11:00</dateout> <credit>9999900</credit> <cos>3</cos> </checkin> </pms_data_request></pre> <p>----- json -----</p> <pre>{"checkin": {"address": "2345", "room": "2345", "account": "2345", "datein": "20180909", "dateout": "2018 0910", "language": "en", "firstname": "grand", "lastname": "stream", "vipcode": "1234", "cos": "1", "credit": "100"}}</pre>
address				identifier recognized by destination
room				room number, source room
account				account number
firstname				firstname of guest
lastname				lastname of guest
language				language for account

vipcode				vipcode
datein				datein format YYYY/MM/DD hh:mm
dateout				dateout format YYYY/MM/DD hh:mm
credit				credit
cos				call permission 1 < 2 < 3 < 4
d_address				Mov :destination address
r_room				Move :destination room
w_action	0,1			1 = set. 0 = cancel
w_mode	1,2			1 = single (default). 2 = daily.
w_date	YY YY MM DD			wakeup date format YYYYMMDD
w_time	HH MM			wakeup time format HHMM
status	0, 1, 2, 3, 4, 5, 6	No	int	<p>Each value means a specific status. Find below each status with its corresponding code.</p> <ul style="list-style-type: none"> ● 0 = Not checked in (This is the default status of a newly created room and cannot be set via PMS API Update) ● 1 = Available ● 2 = Cleaning ● 3 = Repairing ● 4 = Vacant ● 5 = Dirty ● 6 = Closed
Successful response				
status	0	yes	int	Successful response, status is 0
Failed response				
status	0	yes	int	Status is -1
error		yes	string	Error description

Pmsapi

The following actions can also be done using pmsapi action :

Update

```

{
  "request": {
    "action": "pmsapi",
    "cookie": "sid612583207-1551962142",
    "token": "63E780C3F321D13109C71BF81805476E",
    "format": "xml",
    "data": "<pms_data_request>
      <update>
        <address>1000</address>
        <room>100</room>
        <account>123456</account>
        <firstname>John</firstname>
        <lastname>Doe</lastname>
        <language>EN</language>
        <vipcode>2</vipcode>
        <datein>2010/01/01 10:00</datein>
        <dateout>2010/01/07 11:00</dateout>
        <credit>9999900</credit>
        <cos>3</cos>
        <status>3</status>
      </update>
    </pms_data_request>"
  }
}

```

Mov

```

{
  "request": {
    "action": "pmsapi",
    "cookie": "sid612583207-1551962142",
    "token": "63E780C3F321D13109C71BF81805476E",
    "format": "xml",
    "data": "<pms_data_request>
      <mov>
        <address>1000</address>
        <room>100</room>
        <d_address>1002</d_address>
        <d_room>1002</d_room>
      </mov>
    </pms_data_request>"
  }
}

```

Wakeup

```

{
  "request": {
    "action": "pmsapi",
    "token": "63E780C3F321D13109C71BF81805476E",
    "format": "xml",
    "data": "<pms_data_request>
      <wakeup>
        <address>1000</address>
        <room>1000</room>
        <w_action>1</w_action>
        <w_mode>1</w_mode>
        <w_date>20140101</w_date>
        <w_time>0900</w_time>
      </wakeup>
    </pms_data_request>",
    "cookie": "sid612583207-1551962142"
  }
}

```


Checkout

```
{
  "request": {
    "action": "pmsapi",
    "cookie": "sid612583207-1551962142",
    "token": "63E780C3F321D13109C71BF81805476E",
    "format": "xml",
    "data": "<pms_data_request>
      <checkout>
        <address>1000</address>
        <room>100</room>
      </checkout>
    </pms_data_request>"
  }
}
```

Add Mini Bar

```
{
  "request": {
    "action": "pmsapi",
    "cookie": "sid612583207-1551962142",
    "token": "63E780C3F321D13109C71BF81805476E",
    "format": "xml",
    "data": "<pms_data_request>
      <adminibar>
        <barcode>12450</barcode>
        <barname>winebar</barname>
        <prompt>record/sukima</prompt>
        <verifyskip></verifyskip>
        <listgoods></listgoods>
      </adminibar>
    </pms_data_request>"
  }
}
```

Delete Mini Bar

```
{
  "request": {
    "action": "pmsapi",
    "cookie": "sid612583207-1551962142",
    "token": "63E780C3F321D13109C71BF81805476E",
    "format": "xml",
    "data": "<pms_data_request>
      <delminibar>
        <barcode>1324</barcode>
      </delminibar>
    </pms_data_request>"
  }
}
```

Add Mini Bar goods

```
{
  "request": {
    "action": "pmsapi",
    "token": "63E780C3F321D13109C71BF81805476E",
    "cookie": "sid612583207-1551962142",
    "format": "xml",
    "data": "<pms_data_request><adminibargoods>
      <goodscode>900</goodscode>
      <goodsname>beverage</goodsname>
    </adminibargoods>
  </pms_data_request>",
  }
}
```

Delete Mini Bar goods

```
{
  "request": {
    "action": "pmsapi",
    "cookie": "sid612583207-1551962142",
    "token": "63E780C3F321D13109C71BF81805476E",
    "format": "xml",
    "data": "<pms_data_request><delminibargoods>
      <goodscode>900</goodscode>
    </delminibargoods>
  </pms_data_request>"
  }
}
```

List Mini Bar goods

Retrieves the list of purchasable items that have been set.

Request:

```
{
  "request": {
    "action": "pmsapi",
    "cookie": "sid833196619-1706253582",
    "data": {
      "listMiniBarGoods": {}
    },
    "token": "16c4a7b1fe890f89c8908f3f522fc18f"
  }
}
```

Successful Response:

```

{
  "response":{
    "goods_name":[
      {
        "amount":"100",
        "extension":"01",
        "goods_name":"apple",
        "goods_tax":1.1,
        "prompt_error":"set-failure",
        "prompt_success":"set-success"
      },
      {
        "amount":"5",
        "extension":"02",
        "goods_name":"banana",
        "goods_tax":1.1,
        "prompt_error":"set-failure",
        "prompt_success":"set-success"
      },
      {
        "amount":"",
        "extension":"03",
        "goods_name":"paper",
        "goods_tax":0.0,
        "prompt_error":"set-failure",
        "prompt_success":"set-success"
      }
    ],
    "page":1,
    "total_item":3,
    "total_page":1
  },
  "status":0
}

```

Parameters:

Parameters	Type	Description
status	int	Returns 0 if successful.
amount	Double	Price of the minibar item.
extension	String	Item code of the minibar item.
goods_name	String	Name of the minibar item.
goods_tax	Double	Tax rate of the minibar item. If set to 0, the global tax rate will be used of billing.

Get Mini Bar information

Retrieves information about the configured minibar.

Request:

```
{
  "request": {
    "action": "pmsapi",
    "cookie": "sid833196619-1706253582",
    "data": {
      "getMiniBar": {}
    },
    "token": "16c4a7b1fe890f89c8908f3f522fc18f"
  }
}
```

Successful Response:

```
{
  "response":{
    "minibar_settings":{
      "del_extension":"10087",
      "enable_list_goods":"yes",
      "extension":"10086",
      "global_tax":1.0,
      "minibar_enable":"yes",
      "minibar_name":"",
      "prompt":"welcome",
      "verify_skip":"no"
    }
  },
  "status":0
}
```

Parameters:

Parameter	Type	Description
status	int	Returns 0 if successful
extension	String	The number to dial to bill a minibar item to a Guest.
del_extension	String	The number to dial to remove/cancel a minibar item billed to a Guest.
prompt	String	The filename of a custom voice prompt on the UCM that's used for the minibar. If this is used as a request parameter, the value must be formatted as record/filename (e.g., if the prompt's file name is kiri.wav, the value must be record/kiri).
verify_skip	String	yes/no. If yes, housekeepers will use 0000 as their housekeeper code.
enable_list_goods	String	yes/no. If yes, users will be able to bill multiple items at once by separating each item with *. Otherwise, items must be billed one at a time.

global_tax	Double	Set the global tax rate of minibar items. If an individual item does not have its own tax rate, this tax rate value will be used.
minibar_enable	String	yes/no. If yes, the minibar will be enabled, and users will be able to bill minibar items to Guests.
minibar_name	String	Name of the minibar.

Add Waiter

```
{
  "request": {
    "action": "pmsapi",
    "cookie": "sid612583207-1551962142",
    "token": "63E780C3F321D13109C71BF81805476E",
    "format": "xml",
    "data": "<pms_data_request><addminibarwaiter>
      <maidcode>9898</maidcode>
      <password>1324</password>
    </addminibarwaiter>
  </pms_data_request>"
  }
}
```

Delete waiter

```
{
  "request": {
    "action": "pmsapi",
    "cookie": "sid612583207-1551962142",
    "token": "63E780C3F321D13109C71BF81805476E",
    "format": "xml",
    "data": "<pms_data_request><delminibarwaiter>
      <maidcode>9898</maidcode>
    </delminibarwaiter>
  </pms_data_request>"
  }
}
```

Callforward unconditional

```
{
  "request": {
    "action": "pmsapi",
    "cookie": "sid612583207-1551962142",
    "token": "63E780C3F321D13109C71BF81805476E",
    "format": "xml",
    "data": "<pms_data_request><cfu>
      <address>4000</address>
      <room>400</room>
      <cfwt>4002</cfwt>
    </cfu>
  </pms_data_request>"
  }
}
```

DND

```
{
  "request": {
    "action": "pmsapi",
    "cookie": "sid612583207-1551962142",
    "token": "63E780C3F321D13109C71BF81805476E",
    "format": "xml",
    "data": "<pms_data_request>
<address>4000</address>
          <room>400</room>
          <status>0</status>
        </dnd>
      </pms_data_request>"
  }
}
```

List PMS rooms

Lists all existing rooms.

Request:

```
{
  "request": {
    "action": "pmsapi",
    "cookie": "sid833196619-1706253582",
    "data": {
      "listPMSRoom": {}
    },
    "token": "16c4a7b1fe890f89c8908f3f522fc18f"
  }
}
```

Successful Response:

```

{
  "response":{
    "page":1,
    "pms_room":[
      {
        "account":"",
        "address":"4000",
        "chki_status":"yes",
        "credit":"",
        "datein":"2024-01-11 15:59:00",
        "dateout":"2024-01-12 15:59:00",
        "default_permission":"internal",
        "extension":"4000",
        "first_name":"",
        "language":"",
        "last_name":"",
        "maid":"",
        "number":"4000",
        "order_id":"203009081022274000",
        "permission":"internal",
        "room":"4000",
        "s_date":"",
        "s_time":"",
        "status":"1",
        "tmp_address":"4000",
        "tmp_extension":"4000",
        "tmp_user_name":"4000",
        "user_name":"",
        "vipcode":""
      }
    ],
    "total_item":3,
    "total_page":1
  },
  "status":0
}

```

Parameters:

Parameter	Type	Description
user_name	String	Guest's full name
vipcode	String	Guest's category code
address	String	Unique identifier of the room
extension	String	Extension number of the room
room	String	Room number
account	String	Guest's account number
firstname	String	Guest's first name
lastname	String	Guest's last name
language	String	Language of the phone system prompts. English and Chinese are available by default. Additional language voice packs can be downloaded from the PBX Settings -> Voice Prompts page.

datein	String	Check-in date
dateout	String	Check-out date
credit	String	Guest's credit amount
tmp_addres	String	Guest's room before a room change
chki_status	String	Check-in status
default_permission	String	Default calling privileges of the room upon check-in
tmp_extension	String	Guest's extension number before a room change
tmp_user_name	String	Guest's name before a room change
status	int	<p>Room status. The supported statuses are:</p> <ul style="list-style-type: none"> ● 0 - Not checked in (This is the default status of a newly created room and cannot be set via PMS API Update) ● 1 - Available ● 2 - Cleaning ● 3 - Repairing ● 4 - Vacant ● 5 - Dirty ● 6 - Closed
s_time	String	Room status change time
s_date	String	Room status change date

Get PMS room goods

Retrieves the status of purchasable minibar items in a specified room.

Request:

```
{
  "request": {
    "action": "pmsapi",
    "cookie": "sid833196619-1706253582",
    "data": {
      "getPMSRoomGoods": {
        "room": "4001"
      }
    },
    "token": "16c4a7b1fe890f89c8908f3f522fc18f"
  }
}
```

Successful Response:


```
{
  "response":{
    "minibar_goods":[],
    "page":1,
    "total_item":0,
    "total_page":1
  },
  "status":0
}
```

Parameters:

Parameters	Type	Description
status	int	Returns 0 if successful.
room	string	Specifies the room to get information of
goods_name	String	Name of the minibar item
count	int	Quantity of the minibar item
amount	Double	Price of the minibar item
time	String	Log time
maid	String	Code of the assigned housekeeper
tax	Double	Tax rate of the minibar item

addMessageBroadcast

This API command allows broadcasting a message to extensions.

◦ Request

The request below sends a message to extensions 1000, 1001, and 1002 in department with ID "1" (found through [listDepartment](#) command)

```
{
  "request":{
    "action":"addMessageBroadcast",
    "subject":"the name of this broadcast",
    "source":"Sender Name",
    "content":"Message Content",
    "recipient":{"extension\\":"\\",
      "department\\":"\\", "extension_group\\":"\\", "department_extension\\":{
        [{"department_id\\":"1\\", "extension\\":"1002\\"},
        {"department_id\\":"1\\", "extension\\":"1001\\"},
        {"department_id\\":"1\\", "extension\\":"1000\\"}]}},
    "cookie":"sid299755200-1721961953"
  }
}
```

Sending a message to extension groups "group-3" and "group-2"

```
{
  "request":{
    "action":"addMessageBroadcast",
    "subject":"the name of this broadcast",
    "source":"Sender Name",
    "content":"Message Content", "recipient":""
  }
}
```

Sending a message to ring group “6400”

```
{
  "request":{
    "action":"addMessageBroadcast",
    "subject":"the name of this broadcast",
    "source":"Sender Name",
    "content":"Message Content",
    "recipient":""
  }
}
```

Parameter	Supported Values	Required	Type	Note
cookie		yes	string	Required by almost all requests. Cookie value is generated after a successful login. Without a valid cookie, error code -6 will be returned.
subject		yes	string	Enter the name/subject of the message broadcast.
source		no	string	Enter the sender name of the message broadcast.
content		no	json string	Enter the message contents of the broadcast.
recipient		yes	json string	Enter the recipients of the message broadcast.

addMessageBroadcast

applyChanges

The “applyChanges” action allows users to apply the changes made.

- Request

```
{
  "request":{
    "action":"applyChanges",
    "cookie":"sid1965594381-1575027385"
  }
}
```

o Response

```
{
  "response":{
    "settings":"0"
  },
  "status":0
}
```

Key Word	Value	Mandatory	Type	Note
Request parameter				
cookie		yes	string	Returned value after login. All requests must include this value. If no cookie is included, error code -6 will be returned.
Successful response				
status	0	yes	int	Successful response, status is 0
Failed response				
status		yes	int	Please see the error code list for more details.

applyChanges

Error Return Codes

Code	Description
-0	Success
-1	Invalid parameters
-5	Need authentication
-6	Cookie error
-7	Connection closed
-8	System timeout
-9	Abnormal system error!

-15	Invalid value
-16	No such item. Please refresh the page and try again
-19	Unsupported
-24	Failed to operate data
-25	Failed to update data
-26	Failed to get data
-37	Wrong account or password!
-43	Some data in this page has been modified or deleted. Please refresh the page and try again
-44	This item has been added
-45	Operating too frequently or other users are doing the same operation. Please retry after 15 seconds.
-46	Operating too frequently or other users are doing the same operation. Please retry after 15 seconds.
-47	No permission
-50	Command contains sensitive characters
-51	Another task is running now
-57	Operating too frequently, or other users are doing the same operation. Please retry after 60 seconds
-68	Login Restriction
-69	There is currently a conference going on. Changes cannot be applied at this time
-70	Login Forbidden
-71	The username doesn't exist
-90	The conference is busy, cannot be edited or deleted
-98	There are currently digital calls. Failed to apply configuration

Error Return Codes