

RIGHT ANGLE PLUG CRIMP OR SOLDER TYPE


CABLE 2.6/50 S

R125.172.000

Series: SMA

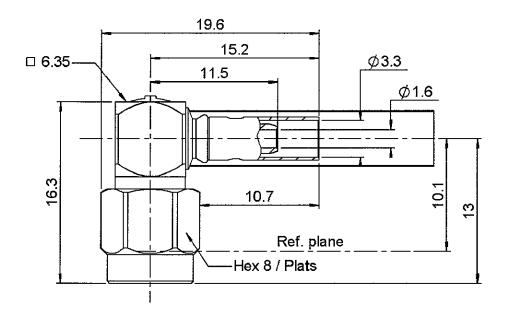





All dimensions are in mm.

	4
ŀ	DI ATINGS (um)

COMPONENTS	MATERIALS	PLATINGS (µm)
BODY CENTER CONTACT OUTER CONTACT INSULATOR GASKET OTHERS PARTS -	STAINLESS STEEL BRASS - PTFE FLUORE SILICONE STAINLESS STEEL -	GOLD 0.5 OVER NICKEL 2 GOLD 1.3 OVER NICKEL 2 - GOLD 0.5 OVER NICKEL 2 -

Issue: 0539 G

In the effort to improve our products, we reserve the right to make changes judged to be necessary.



RIGHT ANGLE PLUG CRIMP OR SOLDER TYPE

R125.172.000

CABLE 2.6/50 S

Series: SMA

PACKAGING

Standard	Unit	Other
100	'W' option	Contact us

ELECTRICAL CHARACTERISTICS

Impedance 50 Ω Frequency 0-12.4 GHz

VSWR 1.15 + 0.03 x F(GHz) Maxi

Insertion loss

O.15 $\sqrt{F(GHz)}$ dB Maxi

RF leakage

-(

60 - F(GHz)) dB Maxi

RF leakage - (60 - F(GHz)) dl Voltage rating 250 Veff Maxi

Dielectric withstanding voltage Insulation resistance 750 Veff mini 5000 M Ω mini

MECHANICAL CHARACTERISTICS

Center contact retention

Axial force – Mating end
Axial force – Opposite end
Torque

27 N mini
27 N mini
28 N.cm mini

Recommended torque

Mating 100 N.cm
Panel nut NA N.cm
Clamp nut NA N.cm
A/F clamp nut 0 mm

Mating life 500 Cycles mini

Weight 4.3 g

ENVIRONMENTAL

Operating temperature -65/+165 ° C

Hermetic seal NA Atm.cm3/s

Panel leakage NA

SPECIFICATION

CABLE ASSEMBLY

Stripping	a	b	С	d	e	f
mm	2.8	7	12.8	0	10	0

Assembly instruction:

Crimp 05

Recommended cable(s)

KX 3B RG 188 RG 316 KX 22A RG 174 FTX RG 174 ECO 316

Characteristics indicated on this data sheet are those that can be achieved with the highest performance cable. Intrinsic limitations of the cable may diminish the performance of the assembly

Cable retention

- pull off 90 N mini - torque NA N.cm

TOOLING

Part Number	Description	Hexagon
R282.211.000	CRIMPING TOOL	3.25
R282.235.003	CRIMPING DIES	3.25
R282.293.000	CRIMPING TOOL	

OTHERS CHARACTERISTICS

Issue: 0539 G

In the effort to improve our products, we reserve the right to make changes judged to be necessary.



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Radiall:

R125172000 R125172000W