




INSULATION DISPLACEMENT CABLE:
0.0394" PITCH, 28 AWG, STRANDED EXTRUDED FEP

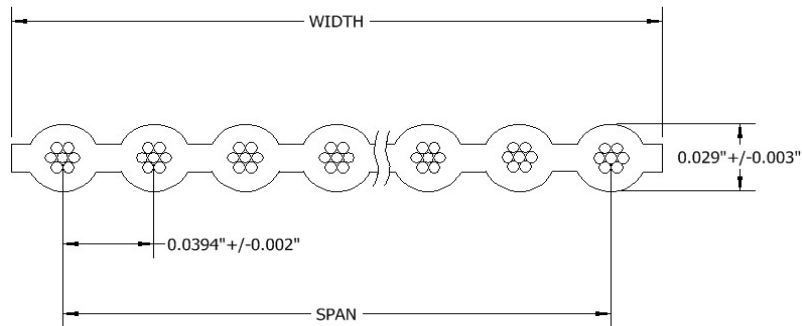

Cond. No.	Part Number	Span	Width
4	1000570197	0.118" \pm 0.005"	0.158" \pm 0.007"
5	1000570424	0.158" \pm 0.005"	0.197" \pm 0.007"
6	1000570082	0.197" \pm 0.007"	0.237" \pm 0.007"
8	1000570218	0.276" \pm 0.007"	0.315" \pm 0.007"
10	1000570140	0.354" \pm 0.007"	0.394" \pm 0.007"
10	1000570141	0.354" \pm 0.007"	0.394" \pm 0.007"
12	1000570145	0.433" \pm 0.007"	0.472" \pm 0.007"
12	1000570146	0.433" \pm 0.007"	0.472" \pm 0.007"
14	1000570149	0.512" \pm 0.007"	0.551" \pm 0.007"
14	1000570426	0.512" \pm 0.007"	0.551" \pm 0.007"
16	1000570155	0.590" \pm 0.007"	0.630" \pm 0.007"
16	1000570156	0.590" \pm 0.007"	0.630" \pm 0.007"
20	1000570161	0.748" \pm 0.010"	0.787" \pm 0.010"
20	1000570162	0.748" \pm 0.010"	0.787" \pm 0.010"
24	1000570168	0.906" \pm 0.010"	0.945" \pm 0.010"
26	1000570173	0.984" \pm 0.010"	1.024" \pm 0.010"
26	1000570174	0.984" \pm 0.010"	1.024" \pm 0.010"
30	1000570179	1.142" \pm 0.010"	1.181" \pm 0.010"
30	1000570180	1.142" \pm 0.010"	1.181" \pm 0.010"
34	1000570185	1.299" \pm 0.010"	1.338" \pm 0.010"
34	1000570474	1.299" \pm 0.010"	1.338" \pm 0.010"
40	1000570192	1.535" \pm 0.010"	1.575" \pm 0.010"
40	1000570193	1.535" \pm 0.010"	1.575" \pm 0.010"
44	1000570200	1.693" \pm 0.010"	1.732" \pm 0.010"
44	1000570201	1.693" \pm 0.010"	1.732" \pm 0.010"
50	1000570202	1.929" \pm 0.010"	1.968" \pm 0.010"
50	1000570203	1.929" \pm 0.010"	1.968" \pm 0.010"

CHARACTERISTICS	
Conductor	28 AWG, 7/36, Silver Plated Copper
Insulation	FEP
Color	Blue Or Blue with Blue Polarity Stripe
Impedance (ohms)	105 Unbalanced
Capacitance (pF/ft)	11.5 Unbalanced
Inductance (uH/ft)	0.12 Unbalanced
Insulation Resistance (Mohm)	>500
Voltage Rating	300V
Temperature Rating	200C

STANDARD PACKAGING
100 ft./spool, 10 Ft. minimum length

UL STYLE 20424