


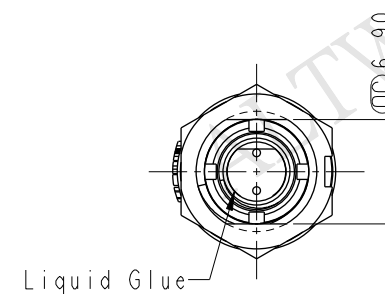
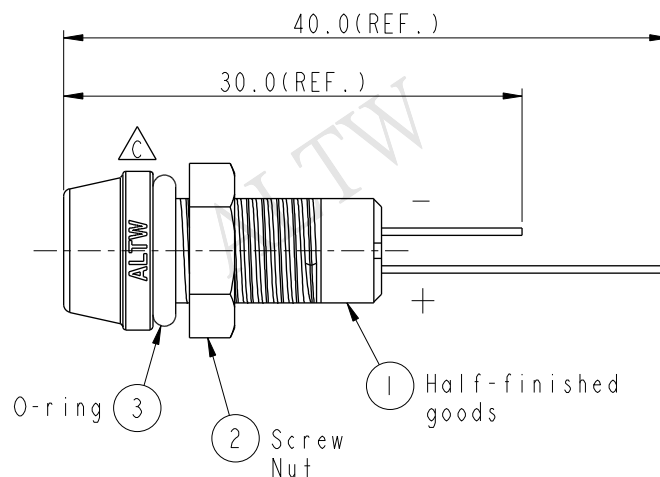



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-930475	2009/03/04	ZhaoRongFu	Add Waterproof Rate
C	LEN1650819	2016/05/25	Ruru	Change Logo

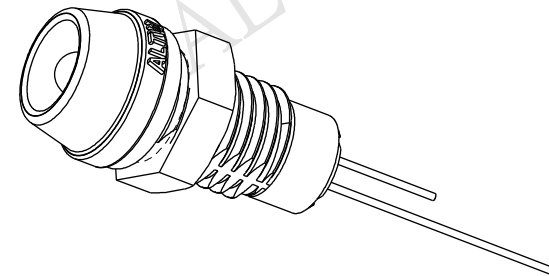


Recommended Panel Cut-Out

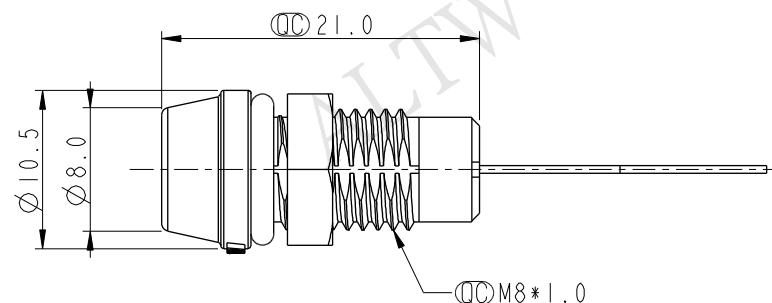

## Notes:

- \*  $\varnothing$  Important Dimension To Check
- \* Waterproof Rate: IP67
- \* LED Holder: PC+ABS, Black
- \* LED:  $\varnothing 3$  mm, Red(高亮度)
- \* O-ring: EPDM, Black
- \* Screw Nut: Nylon+GF
- \* Operating Voltage: DC 4V
- \* Operating Temperature: -40~+80°C
- \* For Panel Thickness 6.5mm Max.



UNIT:mm		TITLE Ø3mm Plastic LED ,Red		ITEM NO L08-01RAAS-PR7001		DRAWN BY Ruru		DATE 2016-05-25	
TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±1°		SCALE 2:1		DWG NO L08-01RAAS-PR7001		CHECKED BY Rita		DATE 2016-05-25	
REV. C		WC-REV. A.2		CUSTOMER ALTW		APPROVED BY Lisa		DATE 2016-05-25	
		SHEET 1 OF 1							
		QC: Inspection item							

Amphenol LTW  
安費諾亮泰企業股份有限公司

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[L08-01RAAS-PR7001](#)