
WIP - ENGINEERING REVIEW ONLY - NOT RELEASED FOR FABRICATION

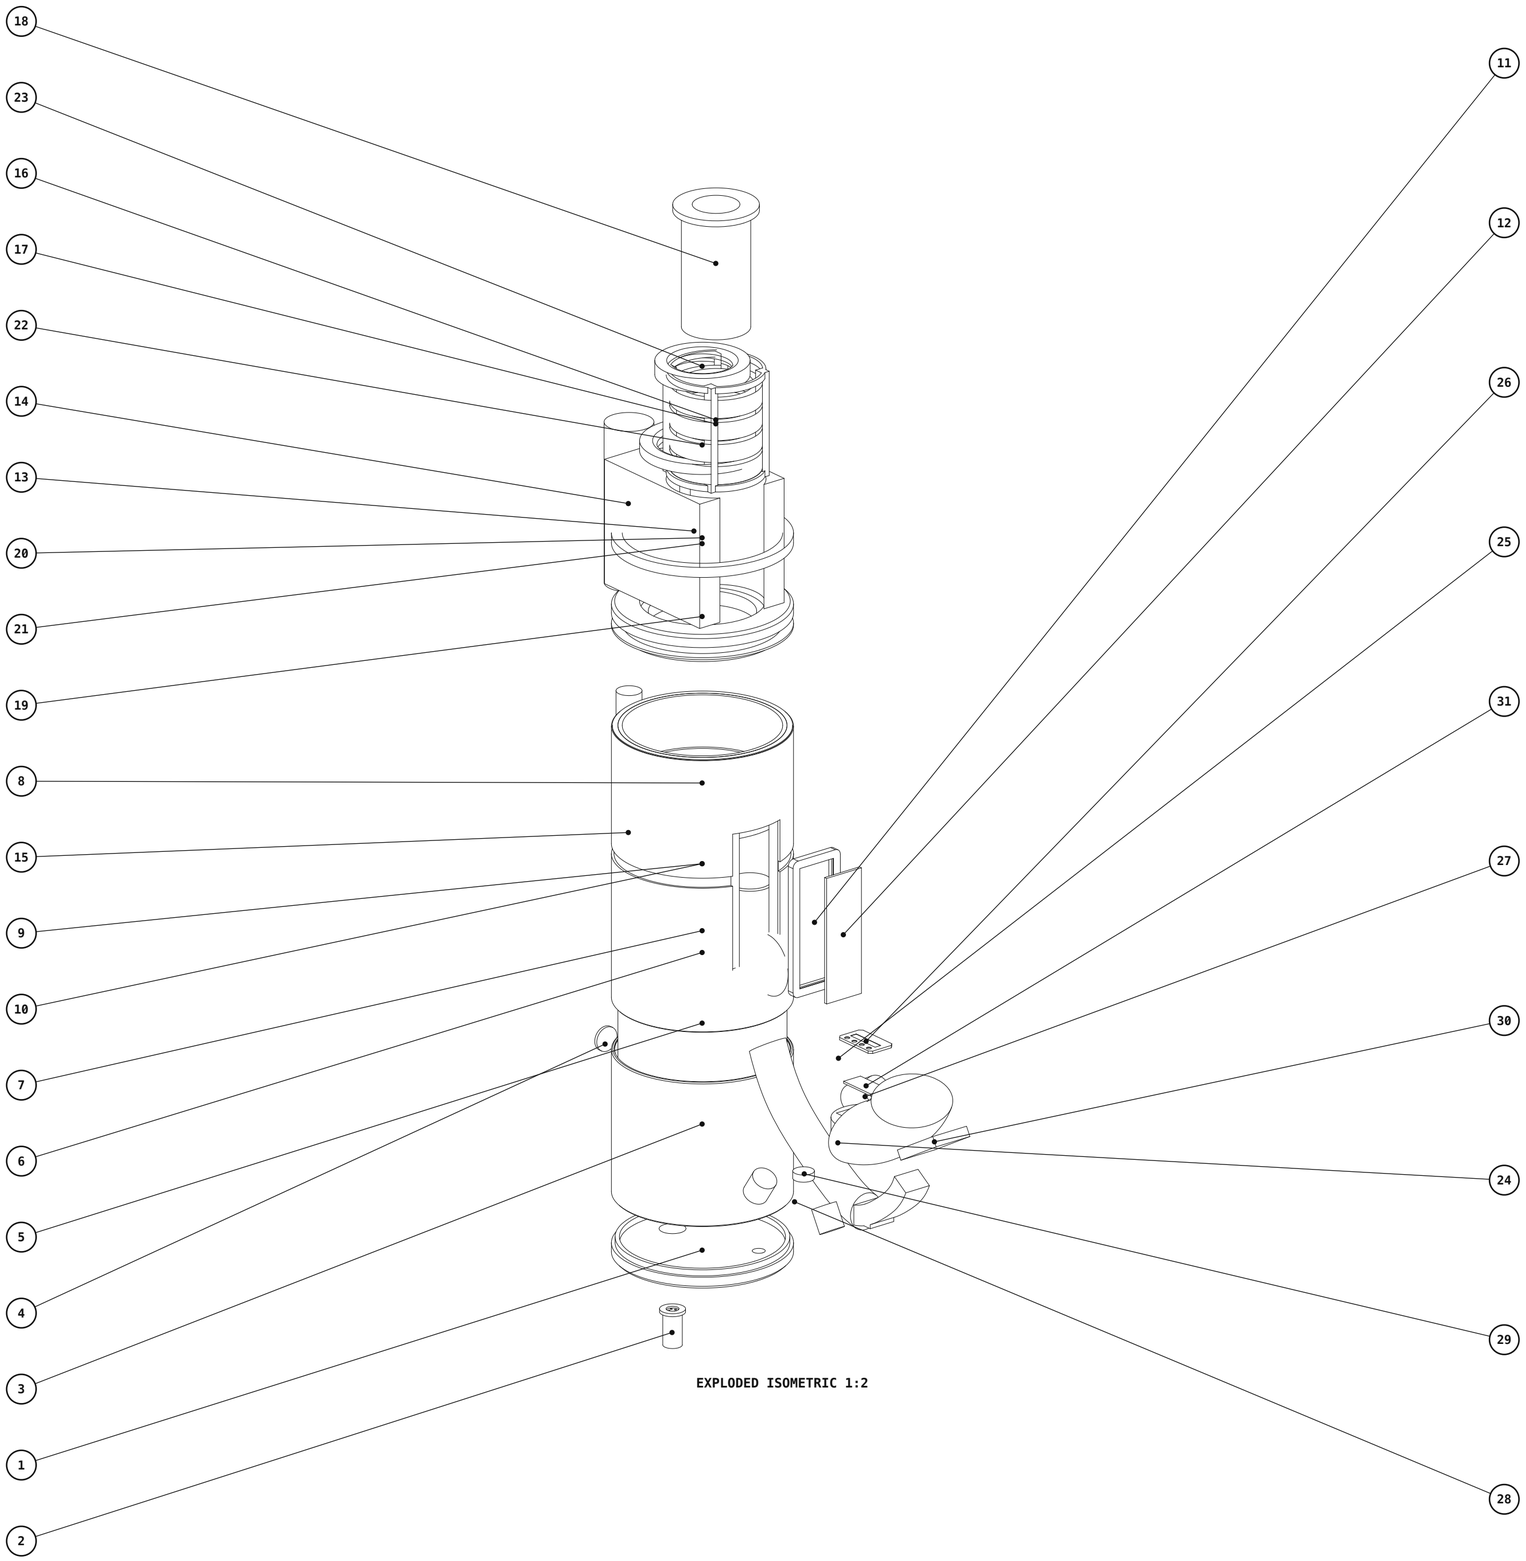


**EXPLODED ISOMETRIC 1:2**

| ITEM | PART NO. | DESCRIPTION | QTY | MATERIAL | KIND | |
|---|---|---|---|---|---|---|
| 1 | SBL-TM-001 | Base cap | 1 | Ti-6Al-4V ELI, ASTM F136 | custom | |
| 2 | SBL-TM-B01 | LEMO K-series 1B receptacle | 1 | Bought component (datasheet envelope | bought | |
| 3 | SBL-TM-002 | Base ring | 1 | Ti-6Al-4V, ASTM B348 Gr 5 | custom | |
| 4 | SBL-TM-003 | Status eye window Ø12 | 1 | C-plane sapphire, AR both sides | custom | |
| 5 | SBL-TM-003a | Cell carrier | 1 | PEEK (Victrex 450G, black) | custom | |
| 6 | SBL-TM-B02 | 21700 cell ×4 (4S1P) | 4 | Li-ion 21700 cell (Molicel P45B) | bought | |
| 7 | SBL-TM-B03 | Radio / link / safety board stack | 3 | FR-4 PCB, 1.6 mm, black soldermask | bought | |
| 8 | SBL-TM-004 | Bulkhead | 1 | Ti-6Al-4V, ASTM B348 Gr 5 | custom | |
| 9 | SBL-TM-006 | Structural tube | 1 | PEEK 30% CF (Victrex 450CA30) | custom | |
| 10 | SBL-TM-007 | Exterior skin | 1 | Pt-cure silicone gel, Shore 00-10/00 | moulded | |
| 11 | SBL-TM-008 | Window bezel | 1 | Ti-6Al-4V ELI, ASTM F136 | custom | |
| 12 | SBL-TM-009 | Window | 1 | C-plane sapphire, AR both sides | custom | |
| 13 | SBL-TM-016 | Carriage frame | 1 | PEEK 30% CF (Victrex 450CA30) | custom | |
| 14 | SBL-TM-B04 | LinMot PS01-23x80 stator (moving) | 1 | Bought component (datasheet envelope | bought | |
| 15 | SBL-TM-B05 | Slider rod Ø12 (fixed) | 1 | Stainless 304L, ASTM A276 | bought | |
| 16 | SBL-TM-018 | Cassette cage | 1 | PEEK 30% CF (Victrex 450CA30) | custom | |
| 17 | SBL-TM-019 | HASEL sector ×16 (4 rings × 4) | 16 | Polyimide flex, 2-layer, ENIG pads | bought | |
| 18 | SBL-TM-024 | Liner (removable) | 1 | Pt-cure silicone gel, Shore 00-10/00 | moulded | |
| 19 | SBL-TM-010 | Cap ring | 1 | Ti-6Al-4V ELI, ASTM F136 | custom | |
| 20 | SBL-TM-011 | STOP collar | 1 | Ti-6Al-4V, ASTM B348 Gr 5 | custom | |
| 21 | SBL-TM-012 | Light ring | 1 | Optical silicone light guide | custom | |
| 22 | SBL-TM-013 | Bezel | 1 | 3Y-TZP zirconia, ivory | custom | |
| 23 | SBL-TM-014 | Iris lip | 1 | Pt-cure silicone gel, Shore 00-10/00 | moulded | |
| 24 | SBL-TF-001 | Spine | 1 | PEEK (Victrex 450G, black) | custom | |
| 25 | SBL-TF-002 | Body overmould | 1 | Pt-cure silicone, Shore A10-A20 | moulded | |
| 26 | SBL-TF-003 | Bridge plate | 1 | Ti-6Al-4V ELI, ASTM F136 | custom | |
| 27 | SBL-TF-004 | Pressure cell | 1 | Medical LSR, Shore A20-A40 | moulded | |
| 28 | SBL-TF-B01 | Voice-coil haptic actuator ×2 | 2 | Bought component (datasheet envelope | bought | |
| 29 | SBL-TF-B02 | Linear resonant actuator | 1 | Bought component (datasheet envelope | bought | |
| 30 | SBL-TF-B03 | Li-ion pouch 1000 mAh | 1 | Li-ion 21700 cell (Molicel P45B) | bought | |
| 31 | SBL-TF-B04 | Link board (BLE + IMU + safety switches) | 1 | FR-4 PCB, 1.6 mm, black soldermask | bought | |

1. Explode offsets are illustrative; items balloon to the BOM.
2. Bought components are datasheet envelopes (kind = bought).

**SABLE ROBOTICS** — **SBL-TM/TF**

EXPLODED ASSEMBLY DRAWING · Sable Tether (M + F pair) — **REV A**

| | | |
|---|---|---|
| MATERIAL: see BOM | FINISH: see BOM | SCALE: |
| GENERAL TOLERANCE: ISO 2768-mK · UNITS mm · ANGLES ° | SURFACE: see Ra callouts; unmarked edges 0.6 × 45° | MASS: — |
| THIRD ANGLE PROJECTION | SHEET 2 / 5 | A2 · 2026-11-08 · parts/cad/src |