

4G Helical Antenna



5 dBi gain

PCB helix form factor, optimized for 700–2600 MHz.



76 mm flat profile

Compact mounting on logger enclosures and brackets.



FME connector

Direct connection to Aquatos and LTX modems, no adapter.



IP66 weatherproof

Outdoor use, –40...+70 °C, UV-resistant cable.

DESCRIPTION


The **4G Helical Antenna 76 mm** is a PCB helix design with integrated resonance optimization for LTE-M and NB-IoT. The robust whip cable with **FME connector** connects directly to the Aquatos logger or LTX modem without adapters. With **5 dBi gain** and IP66 rating, it suits open-field and rooftop installations.

The flat form factor (76 mm diameter) enables compact mounting on logger enclosures, measurement stations, and boom arms. The FME connector integrates directly into the LTX output port.

APPLICATIONS

- Decentralized data logger stations
- Water authority monitoring sites with LTE-M connectivity
- Water level sensors and weather stations on buildings
- Mobile measurement campaigns in open terrain
- Redundant radio link to network infrastructure

4G · FLAT ANTENNA

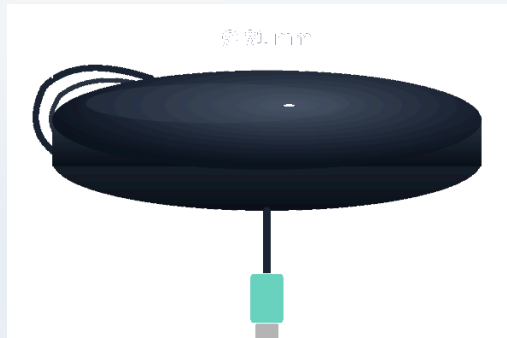

KEY FEATURES

- **5 dBi Gain** · PCB helix design
- Frequency range **700–2600 MHz**
- **FME Connector** · direct connection
- Whip cable · 1.5 m standard
- **IP66 · weather-proof**
- Operating temp –40...+70 °C
- Compact flat form · 76 mm diameter

Technical data

4G Helical Antenna 76 mm

PARAMETER	VALUE
Antenna Type	PCB Helix · planar spiral winding
Frequency Band	700–2600 MHz · LTE-M, NB-IoT
Gain	5 dBi · typ. at 900 MHz
Polarization	Circular (RCP/LCP)
VSWR	<2:1
Impedance	50 Ω
Connector	FME (Reverse Polarity)
Cable Length	1.5 m standard
Housing	ABS + Radome · weather-proof
Rating	IP66
Operating Temperature	–40... +70 °C
Compliance	CE (RED 2014/53/EU) · RoHS



700–2600 MHz

LTE-M, NB-IoT, 4G



FME connector

Direct connection to Aquatos and LTX



50 Ω · VSWR <2:1

Standard impedance, wideband-matched



Weatherproof

IP66/IP67 depending on model



CE · RED · RoHS

Radio Equipment 2014/53/EU



Made in Germany

Engineered & built in Bochum

ADDRESS

TerraTransfer GmbH
Ottostr. 19a
44867 Bochum · Germany

CONTACT

Tel. +49 (0) 2327 83 44 85-1
info@terratriansfer.de
terratriansfer.de

COMMERCIAL REGISTER

HRB 6778 · AG Bochum
USt-ID DE 209458277
CEO: M. Delker