

MODEL: W1000050731-02
 DEVICE ID: S/N 01

DATE: 09/14/2017 13:48
 OPERATOR: CAL @ 801 PTS

Page 1

START: 18.300000 GHz
 STOP: 20.200000 GHz
 STEP: 0.004750 GHz

GATE START: -
 GATE STOP: -
 GATE: -
 WINDOW: -

ERROR CORR: 12-TERM
 AVERAGING: 1 PT
 IF BNDWDTH: 1 KHz

PARAMETER:
 NORMALIZATION:
 REFERENCE PLANE:
 SMOOTHING:
 DELAY APERTURE:

-----CH1-----
 -S11-
 OFF
 0.0000 mm
 0.0 PERCENT


-----CH3-----
 -S21-
 OFF
 0.0000 mm
 0.0 PERCENT

S11 FORWARD REFLECTION

LOG MAGNITUDE

REF = -30.000 dB

5.000 dB/DIV

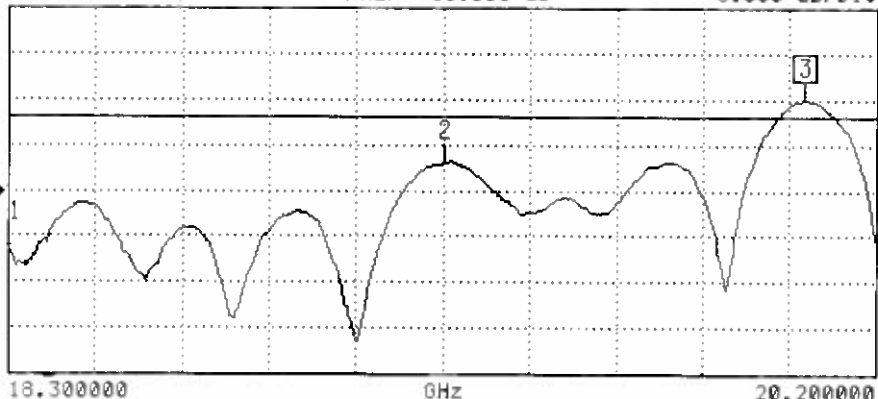

CH 1 - S11

0.0000 mm REF
 0.000 dB OFFSET
 0.00° OFFSET

MARKER 3

20.043250 GHz
 -20.155 dB

MARKER TO MAX
 MARKER TO MIN

1 18.300000 GHz
 -36.002 dB


2 19.254750 GHz
 -27.040 dB

S21 FORWARD TRANSMISSION

LOG MAGNITUDE

REF = 0.000 dB

0.100 dB/DIV

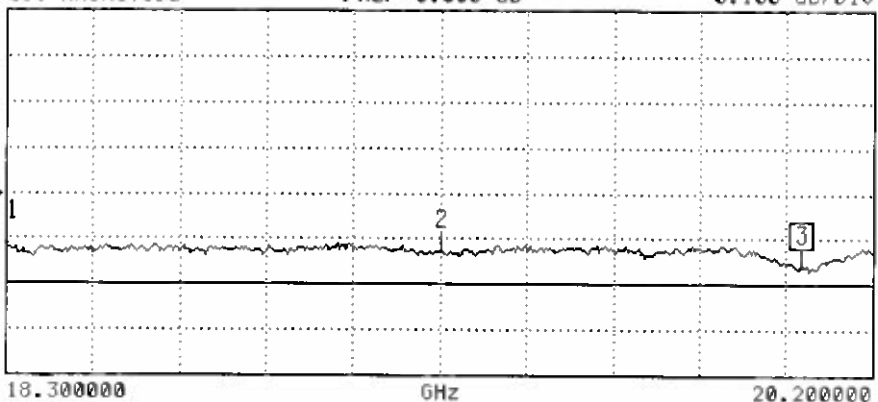

MARKER READOUT
 FUNCTIONS