
安装指南 /Installation Guide

For 1/144 RX-93[YuA Ver.]

特殊说明/Special Description

打印前，您应当确保耗材不存在过度挤出。
我强烈建议首先打印盘6中的测试零件，检查打印机状态并体验手感是否满意。
Before printing, you should ensure that there is no excessive extrusion of filament.I strongly recommend printing the test part in Plate 6 first to check the status of the printer.


对于腿部零件，打印以后沿红线切断表面连接，不切其实也行?
Leg parts:After printing, cut the surface connection along the line.

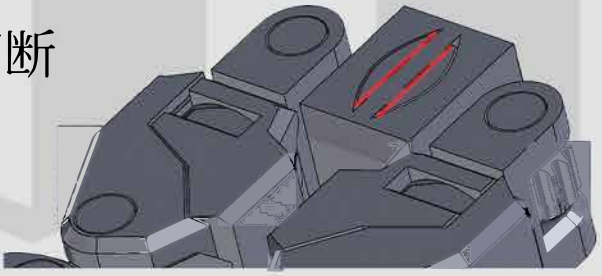


如何寻找零件?
你会在Bambu Studio-对象一栏看到形如
[Step2]objcode.STL 的命名,
其中的2便是它在说明书中首次出现的步骤
How to find the parts?
You will see names like [Step2]objcode.STL
in the "Objects" section of Bambu Studio.
The "2" in it represents the step
where the part first appears in the instruction manual.

1


旋转关节至裙甲下垂
Rotate the joint until the skirt hangs down.

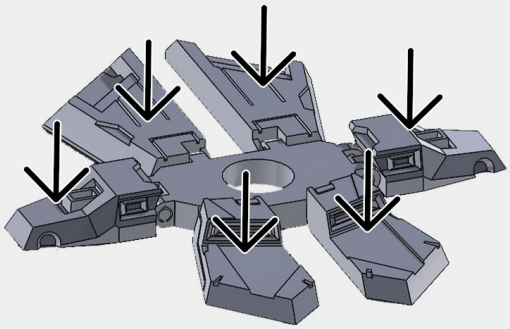


2

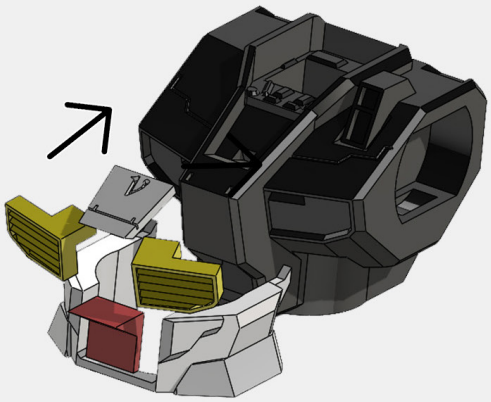

3

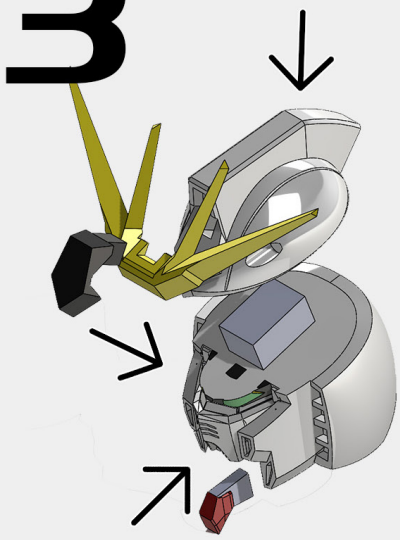


4

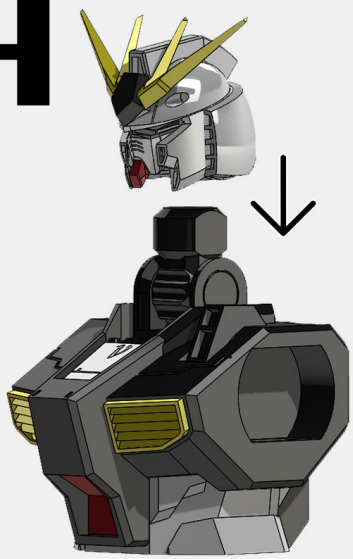

5


x2

x1

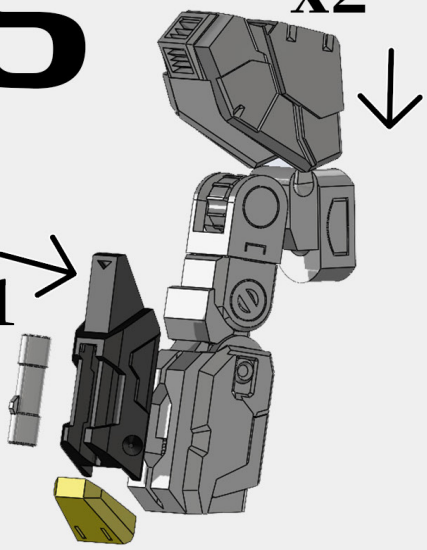

6

安装后旋转关节至两臂下垂
After installation, rotate the joint until arms hang down.

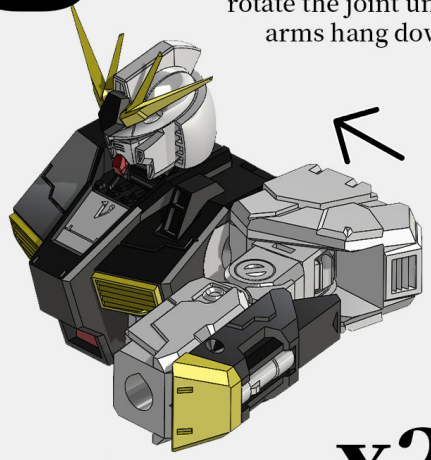


x2


7

旋转关节至两腿下垂


rotate the joint until legs hang down.

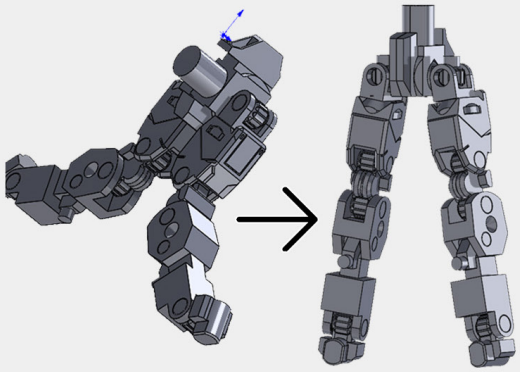


8

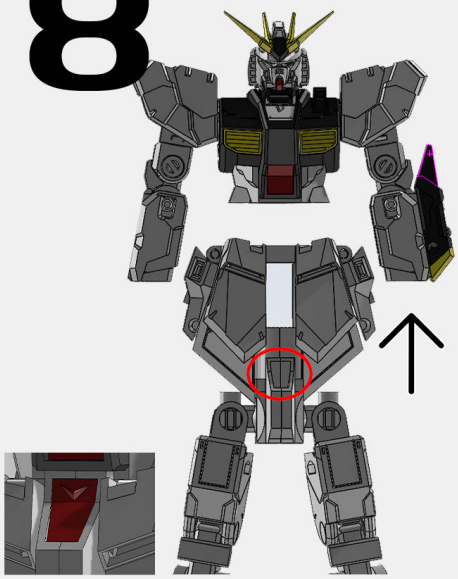

9 x2

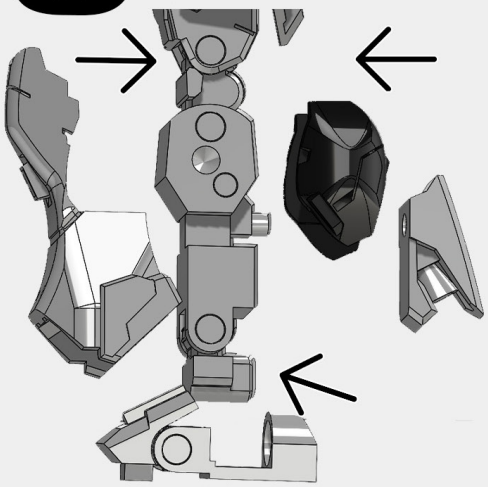


10 x2

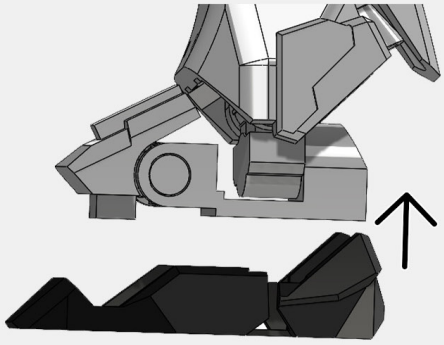


11

旋转关节至图示位置

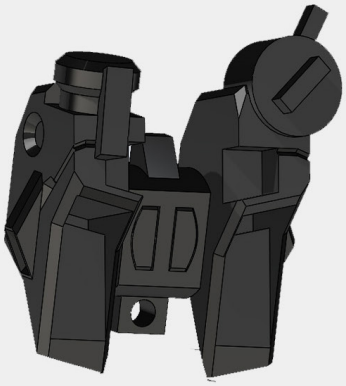


rotate the joint to the position shown in the illustration.

12

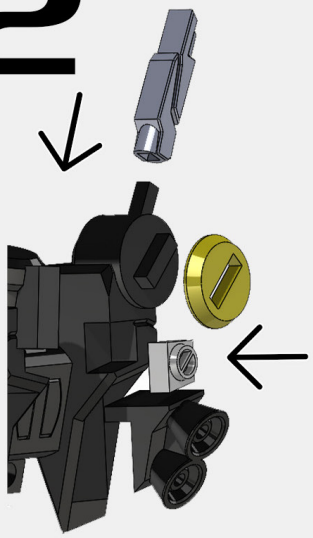

13

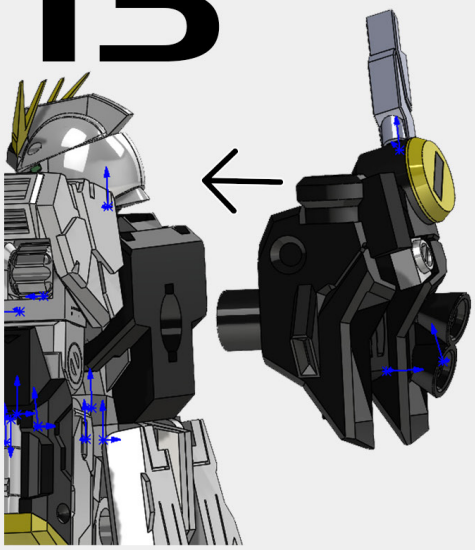


14






15

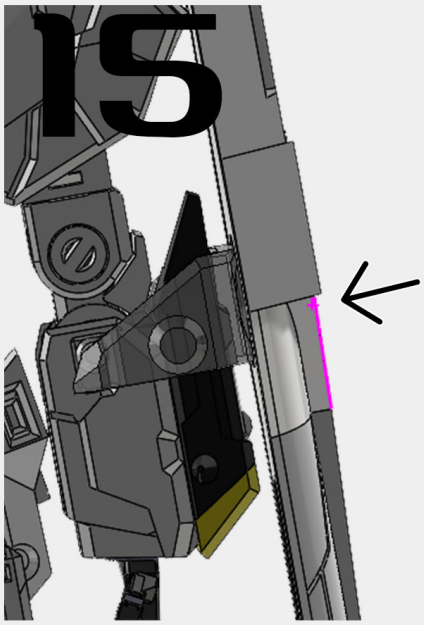


16 x6

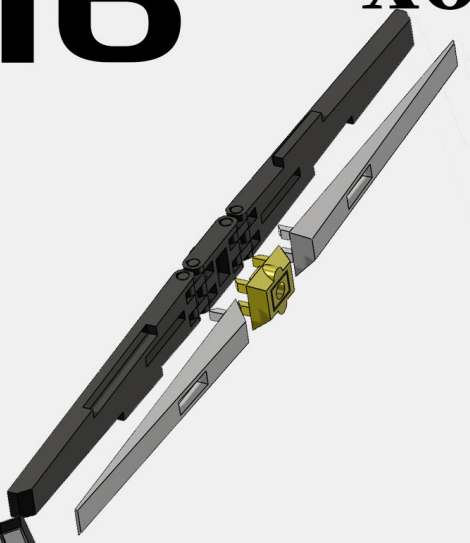

Fin

完成组装
Assemble them together

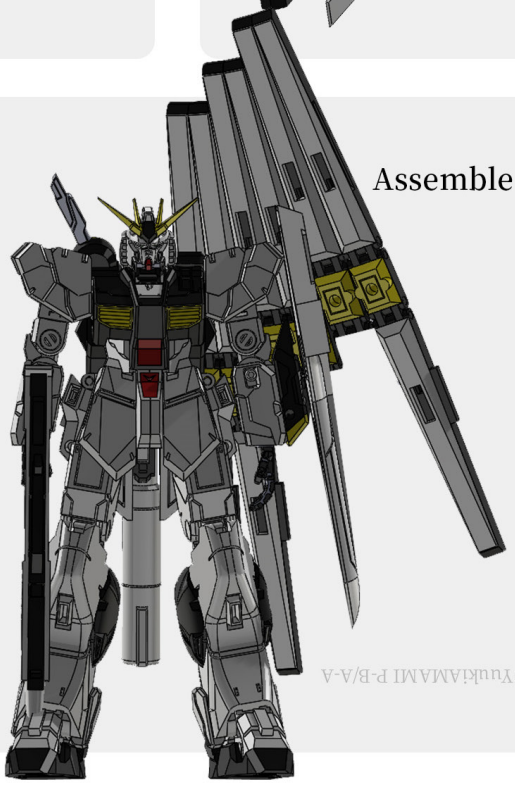

2501160 25Q2 无向有限 Re@YuukiAMAMI P-B/A-A