


First, create 2 machines using WLS Admin console or WLST.

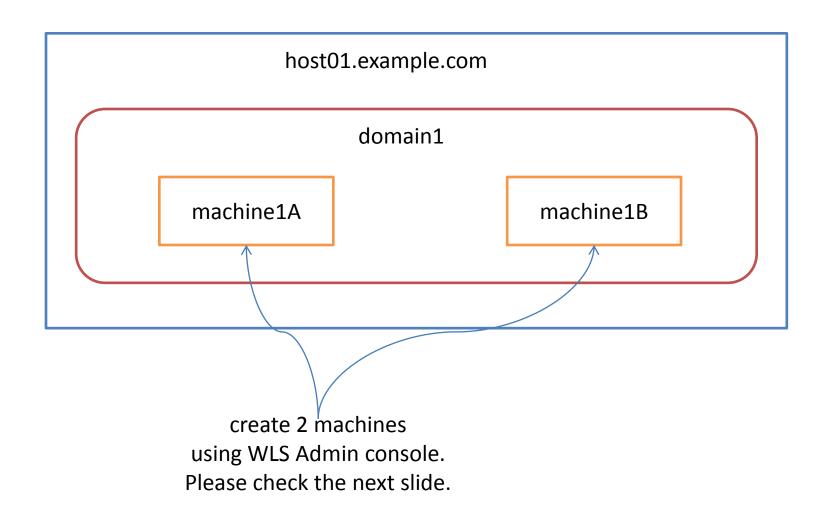


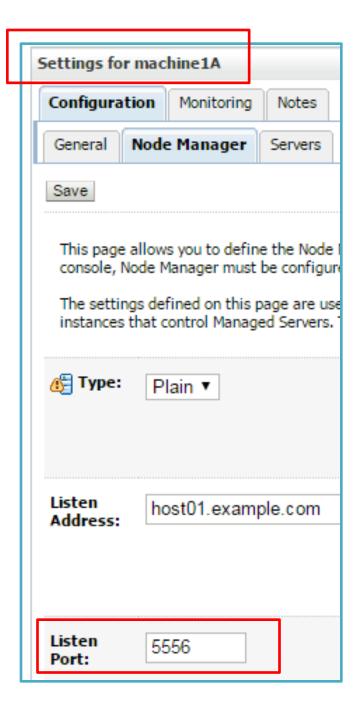

If listen address is same with the first machine, listen port must be changed.

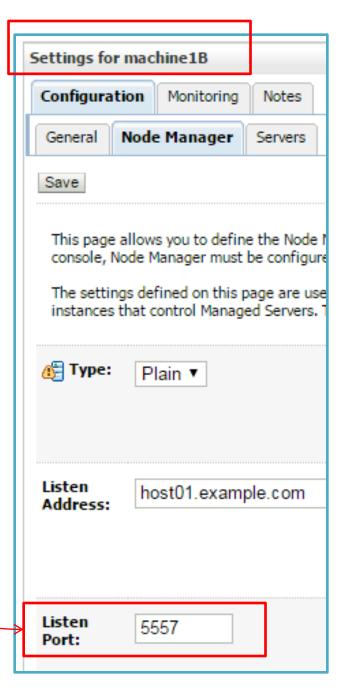

Next, the following scripts and configuration files must be prepared for each machines.

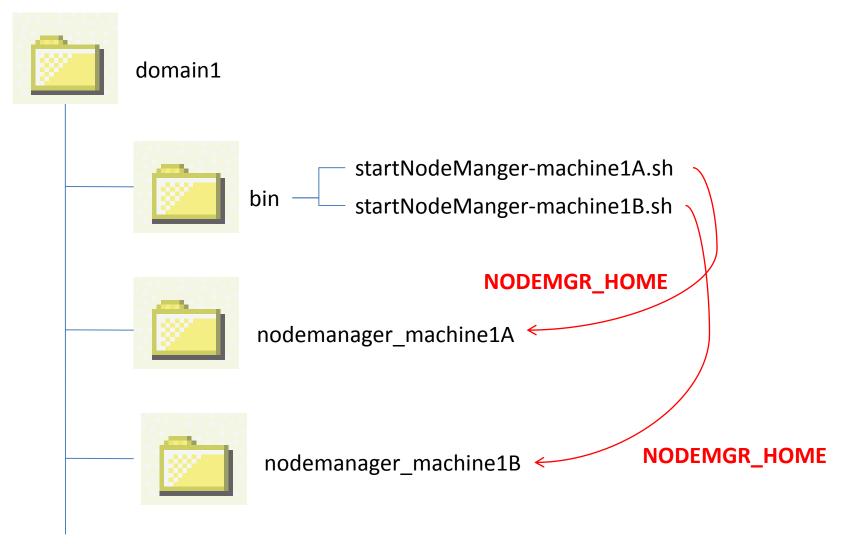

There are sample nodemanager.properties in the next slide

domain1/nodemanager_machine1A/nodemanager.properties for machine1A

DomainsFile=xxx/domain1/nodemanager_machine1A/nodemanager.domains

NodeManagerHome=xxx/domain1/nodemanager_machine1A

ListenAddress=host01.example.com

ListenPort=5556

LogFile==xxx/domain1/nodemanager_machine1A/nodemanager.log

domain1/nodemanager_machine1B/nodemanager.properties for machine1B

DomainsFile=xxx/domain1/nodemanager_machine1B/nodemanager.domains

NodeManagerHome=xxx/domain1/nodemanager_machine1B

ListenAddress=host01.example.com

ListenPort=5557

LogFile==xxx/domain1/nodemanager_machine1B/nodemanager.log