

# TorquePaper 2016.3: Sinusoidal Motion Profile (SMP)

Matthew Webb

February 23, 2016

# Contents


<b>1</b>	<b>A New Profile</b>	<b>2</b>
1.1	Trapezoidal Motion Profile . . . . .	2
1.2	Sine Wave . . . . .	3
1.3	Using the Modified Sin Wave . . . . .	3
<b>2</b>	<b>Determining Time Intervals</b>	<b>5</b>
2.1	SMP Time Intervals . . . . .	5
2.2	First Interval . . . . .	5
2.3	Second and Third Interval . . . . .	5
2.4	Fourth Interval . . . . .	6
2.5	Fifth Interval . . . . .	7
2.6	Final Interval . . . . .	7

# Chapter 1

## A New Profile

### 1.1 Trapezoidal Motion Profile

The graph for TMP is represented by the graph of velocity vs. time in the following figure:

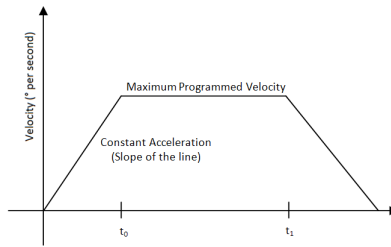

The problem with TMP is the initial (infinitesimal) amount of acceleration required over the first instant to start the profile. This creates inconsistencies in following the profile as time increases. To fix this, the line used to accelerate to maximum velocity must be replaced with a function that has, ideally, infinite derivatives. One such function is sin. The goal of this paper is to create a new motion profile that compensates for this inconsistency but is still efficient. The only constants defined by the user of SMP are  $v_{max}$ ,  $a_{max}$ , and  $D$ , which are the maximum velocity, max acceleration, and distance of the profile of the robot at any time.

## 1.2 Sine Wave

A sin wave can be modified from its parent function in order to fit a certain domain and range. In its most general form, the modified sin wave is defined by:

$$\sin(x) \rightarrow \frac{\sin(kt - \frac{\pi}{2}) + 1}{c}, k = \frac{\pi}{x_{max}}, c = \frac{2}{y_{max}}$$

From the perspective of a motion profile, the maximum y value will be the maximum velocity ( $y_{max} = v_{interval}$ ) and the maximum x value will be the time the profile takes to complete ( $x_{max} = v_{max}$ ). Therefore, the new sin wave is defined as:


$$velocity = v_{mod}(t) = \frac{\sin(kt - \frac{\pi}{2}) + 1}{c}, c = \frac{2}{v_{max}}, k = \frac{\pi}{t_{interval}}$$

The derivative of velocity is acceleration, and thus the derivative of this function is:

$$acceleration = a_{mod}(t) = \frac{k}{c} \cos(kt - \frac{\pi}{2}), c = \frac{2}{v_{max}}, k = \frac{\pi}{t_{interval}}$$

## 1.3 Using the Modified Sin Wave

The acceleration portion of the SMP can be visualized in this image:

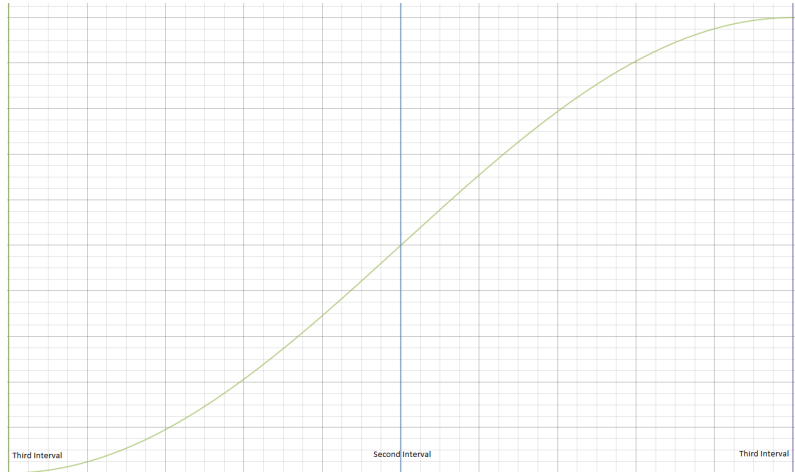

The equation for the velocity describes only the acceleration section of the SMP. The entire profile can be defined by the piecewise function defined below, which applies maximum

velocity between the acceleration and deceleration intervals.

$$v(t) = \begin{cases} v_{mod}(t) & t < t_3 \\ v_{max} & t_3 \leq t \leq t_4 \\ -v_{mod}(t) & t > t_f \end{cases}$$

# Chapter 2

## Determining Time Intervals

### 2.1 SMP Time Intervals

The SMP graph is split into 6 important time intervals, referred to as  $t_0...t_5$  and lastly  $t_f$ . The following table describes each interval.

$t_1$	the initial time of the SMP profile
$t_2$	the time at which the robot has the highest acceleration
$t_3$	the time at which the robot stops accelerating and is holding constant velocity
$t_4$	the time at which the robot starts decelerating
$t_5$	the time at which the robot has the highest deceleration
$t_f$	the final time of the profile (aka $t_{profile}$ )

### 2.2 First Interval

The initial time ( $t_1$ ) of the profile can be found by grabbing time from the robot's FGPA.

### 2.3 Second and Third Interval

The acceleration of the robot is highest at  $t_2$ , which can be proved by plugging in any numbers to the acceleration equation and determining the maximum of the function on the domain.  $t_2 = \frac{t_3}{2}$  because the maximum acceleration occurs at the halfway point between 0 velocity and maximum velocity.

Mathematically, this can be represented by setting  $t = t_2 = \frac{t_3}{2}$ . Note that because the velocity equation is only defined for the interval between  $t_1$  and  $t_3$ ,  $t_{end} = t_3$ , and thus  $c = \frac{2}{t_3}$ . Plugging these values into  $a_{mod}(t)$ , we get the following derivation.

$$a_{max} = \frac{k}{c} \cos\left(\frac{t_3}{2}k - \frac{\pi}{2}\right), c = \frac{2}{v_{max}}, k = \frac{\pi}{t_3}$$

$$a_{max} = \frac{\frac{\pi}{t_3}}{\frac{2}{v_{max}}} \cos\left(\frac{\pi}{t_3} \frac{t_3}{2} - \frac{\pi}{2}\right)$$

$$a_{max} = \frac{v_{max}\pi}{2t_3} \cos\left(\frac{\pi}{2} - \frac{\pi}{2}\right)$$

$$a_{max} = \frac{v_{max}\pi}{2t_3}$$

$$t_3 = \frac{v_{max}\pi}{2a_{max}}$$

$$t_2 = \frac{t_3}{2} = \frac{v_{max}\pi}{4a_{max}}$$

## 2.4 Fourth Interval

We start with the assumption that the addition of the integral of the acceleration and deceleration portions plus the integral of the constant velocity portion results in the total distance that the profile travels. This is represented by:

$$D = 2 \int_{t_1}^{t_3} v_{mod}(t)dt + \int_{t_3}^{t_4} v_{max}dt$$

This can be simplified through the following derivation, to an equation for the third and fourth intervals.

$$D = 2 \int_{t_1}^{t_3} v_{mod}(t)dt + v_{max}(t_4 - t_3)$$

$$D = 2 \int_{t_1}^{t_3} \frac{\sin(kt - \frac{\pi}{2}) + 1}{c} dt + v_{max}(t_4 - t_3)$$

$$D = 2 \left[ \int_{t_1}^{t_3} \frac{\sin(kt - \frac{\pi}{2})}{c} dt + \int_{t_1}^{t_3} \frac{1}{c} dt \right] + v_{max}(t_4 - t_3)$$

$$D = 2 \left[ \int_{t_1}^{t_3} \frac{\sin(kt - \frac{\pi}{2})}{c} dt + \frac{t_3 - t_1}{c} \right] + v_{max}(t_4 - t_3)$$

$$\text{substitution} \rightarrow u = kt - \frac{\pi}{2}, du = kdt, \frac{1}{k}du = dt$$

$$D = 2 \left[ -\frac{1}{ck} \left[ \cos(kt - \frac{\pi}{2}) \right]_{t_1}^{t_3} + \frac{t_3 - t_1}{c} \right] + v_{max}(t_4 - t_3)$$

$$D = 2 \left[ -\frac{1}{ck} \left[ \cos(kt_3 - \frac{\pi}{2}) - \cos(kt_1 - \frac{\pi}{2}) \right] + \frac{t_3 - t_1}{c} \right] + v_{max}(t_4 - t_3)$$

From here,  $t_1$  is the beginning of the profile and can be set to 0 for the rest of this derivation.

$$D = 2 \left[ -\frac{1}{ck} \cos(kt_3 - \frac{\pi}{2}) + \frac{t_3}{c} \right] + v_{max}(t_4 - t_3)$$

Finally, we must plug in  $k = \frac{\pi}{t_3}$  and  $c = \frac{2}{v_{max}}$ .

$$D = 2 \left[ -\frac{t_3 v_{max}}{2\pi} \cos(\frac{\pi}{2}) + \frac{t_3 v_{max}}{2} \right] + v_{max}(t_4 - t_3)$$

$$D = 2 \left( \frac{t_3 v_{max}}{2} \right) + v_{max}(t_4 - t_3)$$

$$D = t_3 v_{max} + v_{max}(t_4 - t_3)$$

$$D = v_{max}(t_3 + t_4 - t_3)$$

$$t_4 = \frac{D}{v_{max}}$$

## 2.5 Fifth Interval

## 2.6 Final Interval

The total time of the profile,  $t_f$ , can be easily defined using symmetry. The acceleration and deceleration portions are exactly equal, which means  $t_f = 2t_3 + (t_4 - t_3) = t_4 + t_3$ .

$$t_f = t_4 + t_3$$

$$t_f = \frac{D}{v_{max}} + \frac{v_{max}\pi}{2a_{max}}$$

$$t_f = \frac{2a_{max}D}{2a_{max}v_{max}} + \frac{(v_{max})^2\pi}{2v_{max}a_{max}}$$



$$t_f = \frac{2a_{max}D + (v_{max})^2\pi}{2a_{max}v_{max}}$$