MECH230 - Fall 2024
Recommended Problems - Set 03

Theresa Honein

September 2, 2024

The problems are taken from J. L. Meriam, L. G. Kraige, and J. N. Bolton (MKB), Engineering Mechanics: Dynamics, Ninth Edition, Wiley, New York, 2018.

1. [MKB 2/021] Take the origin to be at the satellite and $\mathbf{E}_x$ and $\mathbf{E}_y$ to point rightwards and upwards respectively. Write the position of the rocket both in cylindrical and Cartesian coordinates.

2/121 SS The rocket is fired vertically and tracked by the radar station shown. When θ reaches 60°, other corresponding measurements give the values $r = 9$ km, $\ddot{r} = 21$ m/s^2, and $\dot{\theta} = 0.02$ rad/s. Calculate the magnitudes of the velocity and acceleration of the rocket at this position.

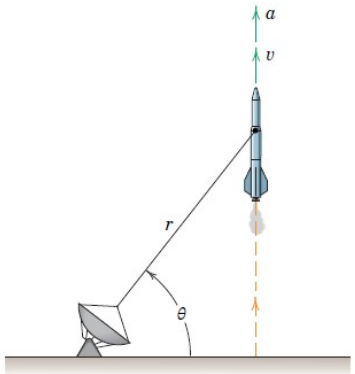

PROBLEM 2/121

 Compiled on 09/01/2024 at 4:21pm

2. [MKB 02-105] Take $\mathbf{E}_x$ and $\mathbf{E}_y$ to point rightwards and upwards respectively. Write the position of the car both in cylindrical and Cartesian coordinates.

2/105 A car P travels along a straight road with a constant speed $v = 65$ mi/hr. At the instant when the angle $\theta = 60°$, determine the values of $\dot{r}$ in ft/sec and $\dot{\theta}$ in deg/sec.

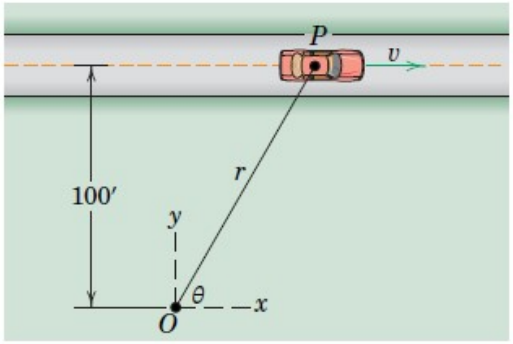

PROBLEM 2/105

3. [MKB 02-126] Take $\mathbf{E}_x$ and $\mathbf{E}_y$ to point rightwards and upwards respectively. Write the position vector of P as

$$\mathbf{r} = (0.75 + \ell)\mathbf{e}_r \quad \text{m}. \tag{1}$$

Differentiate the position vector to obtain the velocity and acceleration vectors.

If this setup is in the vertical plane (i.e. $\mathbf{g} = -g\mathbf{E}_y$), what would be the force applied by the robot arm on part P having mass m at the instant described. Use the four steps in your analysis.

2/126 The robot arm is elevating and extending simultaneously. At a given instant, $\theta = 30°$, $\dot{\theta} = 10$ deg/s = constant, $l = 0.5$ m, $\dot{l} = 0.2$ m/s, and $\ddot{l} = -0.3$ m/s^2. Compute the magnitudes of the velocity **v** and acceleration **a** of the gripped part P. In addition, express **v** and **a** in terms of the unit vectors **i** and **j**.

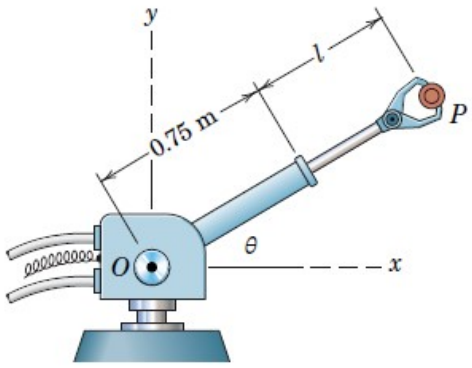

PROBLEM 2/126

4. [MKB 03-037] In this problem, you need to use the 4 steps at points A and B independently. Take your origin to be at the center of curvature of the path (ie. at the center of the circle indicated by +). Take $\mathbf{E}_x$ to point vertically downward and $\mathbf{E}_y$ to point horizontally to the left. How would your calculations be affected if you took $\mathbf{E}_x$ and $\mathbf{E}_y$ to instead respectively point rightwards and upwards?

3/37 The small 0.6-kg block slides with a small amount of friction on the circular path of radius 3 m in the vertical plane. If the speed of the block is 5 m/s as it passes point A and 4 m/s as it passes point B, determine the normal force exerted on the block by the surface at each of these two locations.

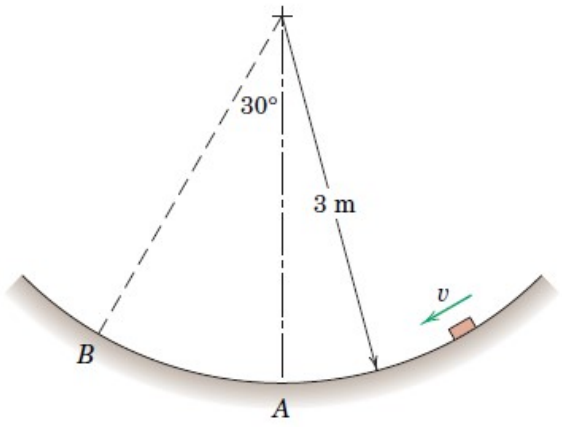

PROBLEM 3/37