

Contents

Chapter	Page
1 General	
Installation survey	1.1/1
General view	1.1/5
Vehicle dimensions 435.115	1.2/1
Vehicle dimensions 435.111	1.2/2
Vehicle dimensions 435.115 (special vehicle with box-type body)	1.2/3
Maximum speeds 435.115/117	1.3/1
Maximum speeds 435.110/111	1.3/2
Weights and trailer loads	1.4/1
Service products, capacities	1.5/1
Special versions considered U 1300 L	1.6/1

Installation Survey

Vehicle	Model	435.110	435.111	435.113 ¹³⁾	435.115	435.115 ¹⁾	435.117
	Sales designation	U 1700	U 1700 L	U 1700 L/38	U 1300 L		U 1300 L/37
Engine	Model	353.959			353.961 oder 353.959 ²⁾	353.961	353.961 Or 353.959 ²⁾
	Sales designation	352 A. V/2 352 A. LII/1 ¹²⁾			352. X/2 Or 352 A.V/2 352.A.LII/1 ¹⁾	352. X/1	352. X/2 Or 352. A.V/2 352 A.LII/1 ¹⁾
	Installation	Series			Series Or SA 36 019 ²⁾	Series with SA 16 457/26 SA 35 975 ¹⁾	Series Or SA 36 019 ²⁾
Single clutch	Model	-					
	Sales designation	F & S GFM 330 K replaced by F & S GMF 330					
	Installation	Series					
Double clutch	Model	-	-	-	-	-	-
	Sales designation	DT 330/310 G	-	DT 330/310 G	-	-	DT 330/310 G
	Installation	SA 35 741	-	SA 35 741	-	-	SA 35 741
Converter clutch	Model	-	-	-	-	-	-
	Sales designation	WSK 310	-	WSK 310	-	-	-
	Installation	SA 35 948	-	SA 35 948	-	-	-
Main transmission	Model	717.901 or 717.900	717.901				
	Sales designation	UG 3/40 - 13,01 GPA ⁹⁾	UG 3/40 - 13,01 GPA				
	Installation	Series or SA	Series	with SA 35 977 ¹⁾	Series		
Auxiliary transmission	Model	Working or crawler gear	-				
	Sales designation	NG 3/40 - 2/5, 76 ¹⁰⁾	-				
	Installation	SA 35 736	-				
Power take-off	Version	PTO shaft with pump connection					
	Ratio	i = 1					
	Maximum speed 1/min	2 800					
	Installation	SA 35 925					
	Version	PTO shaft					
	Ratio	i = 0,71					
	Maximum speed 1/min	4 000					
	Installation	SA 35 925					
Hydrostatic system	Manufacturer	Linde units	-				
	Sales designation	Gr. 70/75	-				
	Installation	SA 36 036	-				
PTO shaft transmission	Version	Engine and transmission shaft ⁴⁾				Transmission shaft ¹⁾ ³⁾	Engine and transmission shaft
	Ratio	i = 4,32 ⁵⁾ /or 4,32 ⁶⁾ /2,46 ⁷⁾				i = 4,32 ⁵⁾	i = 4,32 ⁶⁾ 2,46 ⁷⁾
	Maximum speed 1/min	540/min/or 540/1000/min				540	540/1000/min.
	Installation	SA 35 737				SA 35 737/4	SA 35 737
	Version	Fast engine and transmission PTO shaft				-	³⁾
	Ratio	i = 0,745				-	i = 0,745
	Maximum speed 1/min	3 700				-	3 700
	Installation	SA 35 926				-	SA 35 926

Installation Survey

Vehicle	Model Sales designation	435.110 U 1700	435.111 U 1700 L	435.113 ¹³⁾ U 1700 L/38	435.115 U 1300 L	435.115 ¹¹⁾	435.117 U 1300 L/37
Front axle	Model	737.200 ¹²⁾ or 737.201			737.111		
	Sales designation	AU 3/1 S - 5,3			AU 2/14 S - 4,0		
	Installation	Series or SA			Series	with SA 35 973 ¹¹⁾ Series	
Rear axle	Model	747.204 or 747.205 or 747.206			747.111		747.117
	Sales designation	HU 3/1 S - 5,3 or HU 3/1 S - 6,8			HU 2/14 S - 4,0		HU 2/14 S-4,0
	Installation	Series or SA			Series	with SA 35 974 ¹¹⁾	Series
Steering system	Model	765.601 or 765.305			765.601		
	Sales designation	LS 3 B or LS 7 F			LS 3 B		
	Installation	Series or with SA 35 776			Series	with SA 35 976 ¹¹⁾	Series
Steering pump	Model	-			-		
	Sales designation	ZF 7672 or ZF 7673 ⁹⁾			ZF 7672		ZF 7673
	Installation	Series or SA 35 776 ⁹⁾			Series		Series
Drivers gap	Model	425.821/825	425.800/820/821			425.820	425.821/825
	Sales designation	-	-			-	-
	Installation	SA	Series or SA			with SA	SA

- 1) Basic unit with SA fording ability
- 2) Only valid for fire service vehicles
- 3) Connection only for front PTO shaft
- 4) Connection for front or front and area
- 5) Fast engine or transmission PTO shaft
- 6) From chassis end No. 072 513 i = 4,08
- 7) From chassis end No. 072 513 i = 2,32
- 8) Only in connection with steering system LS 7 F
- 9) Or UG 3/40-8/9,35 GPA
- 10) Or NG 3/40-3/55,87
- 11) From engine end No. 691 150
- 12) From chassis end No. 084 389 model 737.202
- 13) From chassis end No. 084 389

Installation Survey

Vehicle	Model	435.160	435.170
	Sales designation	Attachment TM 170	Attachment Condor
Engine	Model	353.959	353.977
	Sales designation	352 A.LII/1	352 A.V/2
	Installation	Series	
Single clutch	Model	-	
	Sales designation	GFM 330 K replaced by GFM 330	
	Installation	Series	
Double clutch	Model	-	
	Sales designation	-	
	Installation	-	
Converter clutch	Model	-	
	Sales designation	-	
	Installation	-	
Main transmission	Model	717.931	717.930
	Sales designation	UG 63/40-8/13,01 GPA	
	Installation	Series	
Auxiliary transmission	Model	-	
	Sales designation	-	
	Installation	-	
Power take-off	Version	Transmission PTO shaft with pump connection	
	Ratio	i = 1	
	Maximum speed 1/min	2800	
	Installation	Series	
	Version	-	
	Ratio	-	
	Maximum speed 1/min	-	
	Installation	-	
Hydrostatic unit	Manufacturer	-	
	Sales designation	-	
	Installation	-	
PTO shaft transmission	Version	-	
	Ratio	-	
	Maximum speed 1/min	-	
	Installation	-	
	Ratio	-	
	Version	-	
	Maximum speed 1/min	-	
	Installation	-	

Installation Survey

Vehicle	Model	435.160	435.170
	Sales designation	Attachment TM 170	Attachment Condor
Front axle	Model	737.232	737.231
	Sales designation	AU 3/1 S-6,8	
	Installation	Series	
Rear axle	Model	747.231	747.230
	Sales designation	HU 3/1 S-6,8	
	Installation	Series	
Steering	Model	765.305	
system	sales designation	LS 7 F	
	Installation	mit SA 35 776	
Steering	Model	-	
pump	Sales designation	ZF 7673	
	Installation	SA 35 776	
Driver's cab	Model	-	
	Sales designation	-	
	Installation	-	

General View



UR0-0116

435.115



UR0-0129

435.115

General View



435.111



435.111

General view



UR 00-0138

435.113



UR 00-0142

435.113

General view



435.115 Front- with box-type body



435.115 Rear- with box-type body

Vehicle dimensions 435.115

		12,5 – 20 12,5 R 20 ¹⁾	9,00 – 20 9,00 R 20	14,5 – 20 14,5 R 20
Tire sizes				
Wheelbase	mm	3 250	3 250	3 250
Track front	mm	1 860	1 860	1 860
Track rear	mm	1 860	1 860	1 860
Track circle diameter	mm	12 890	12 890	12 890
Turning circle diameter	mm	13 800	13 800	13 800
Length without winch	mm	5 540	5 540	5 540
Length with winch	mm	5 870	5 870	5 870
Overall width (without rear-view mirror)	mm	2 300	2 300	2 300
Overall height (unladen)	approx. mm	2 830	2 880	2 900
Height above cab, unladen	approx. mm	2 750 ²⁾	2 630	2 650
Ground clearance on a convex surface	approx. mm	470	465	495
Overhang front, without winch	°	46	46	46
Overhang front, with winch	°	40	40	40
Overhang rear	approx. °	51	51	51
Ground clearance, front axle (laden)	approx. mm	440	435	465
Ground clearance, rear axle (laden)	approx. mm	440	435	465
Wading depth	approx. mm	1 220	—	—
Permissible height of center of gravity above platform floor for 2000 kg payload, with stabilier at front	mm	800	—	—
Height of trailer coupling (unladen)	mm	945	950	970

Loading space

Length inside	mm	3 150	3 150	3 150
Width inside	mm	2 200	2 200	2 200
Height of side boards	mm	500	500	500
Height beneath canopy top, min.	mm	1 370	1 370	1 370
Height beneath canopy top, max.	mm	1 480	1 480	1 480
Loading height above ground (unladen)	mm	1 290	1 285	1 315

1) special vehicle

2) with camouflage net support

Vehicle dimensions 435.110/.111/.113

Tire sizes	mm	14,75/80 R 20 ¹⁾²⁾	12,5 R 22,5 14,5 R 20	14,5 – 20 16/17 – 24	12,00 R 20 13 R 22,5 14,75/80 R 20 ¹⁾
Wheelbase	mm	3 850	3 250	3 250	3 250
Track front	mm	1 840	1 840	1 840	1 890
Track rear	mm	1 840	1 840	1 840	1 890
Track circle diameter	mm	—	12 880	12 880	12 930
Turning circle diameter	mm	15 800	14 200	14 200	14 200
Length without winch	mm	5 580	5 345	5 345	5 345
Length with winch	approx. mm	6 500	—	—	—
Overall width (without rear-view mirror)	mm	2 350	2 350	2 350	2 350
Overall width (with rear-view mirror)	mm	2 465	2 465	2 465	2 465
Overall height, unladen	approx. mm	3 050	3 030	3 010	3 050
Ground clearance on a convex surface, unladen	approx. mm	680	660	640	680
Overhang front	approx. °	48	50	50	50
Overhang rear	approx. °	47	—	—	—
Ground clearance, front axle (laden)	approx. mm	520	500	480	520
Ground clearance, rear axle (laden)	approx. mm	520	500	480	520
Wading depth	approx. mm	1 200	1 200	1 200	1 200
Height of trailer coupling (unladen)	mm	1 050	1 050	1 050	1 070


Loading space

Length inside	mm	4 050	3 150 ³⁾	3 150 ³⁾	3 150 ³⁾
Width inside	mm	2 350	2 200	2 200	2 200
Height of side boards	mm	500	500	500	500
Loading height above ground (unladen)	mm	1 500	1 480	1 460	1 500


1) 13,00 – 20 Pilote XL

2) 435.113

3) at 435.110 optional 2050, 2550, 3000

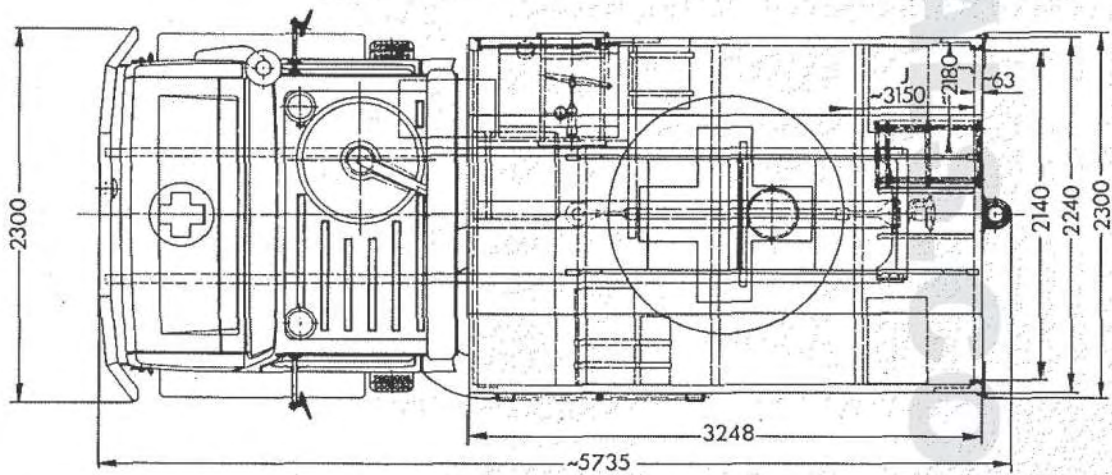

- G Unladen
H Transit loading dimension
J Inside length

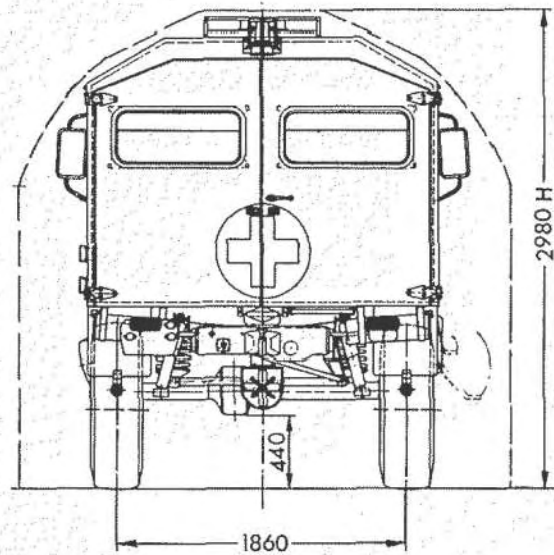

General 00