



Mercedes-Benz

Service

Workshop Manual

Unimog 435

Volume 2

Mercedes-Benz AG
Vertrieb, Kundendienst und Teile
D-7000 Stuttgart 60

Survey

Version

Frame 435.115/.117

31.3

Frame 435.110/111/113

31.8

Trailer coupling


31.13

MBMANUALS.COM


Checking alignment

In event of frame damage, be sure to check all frame joints and parts for cracking. Frame repairs are permissible to a limited extent only. Straightening bent side and crossmembers is only permissible in the case of minor distortions.

- 1 Position frame on horizontal surface at supporting points.
- 2 Check dimensions according to 2.1/2.




General view

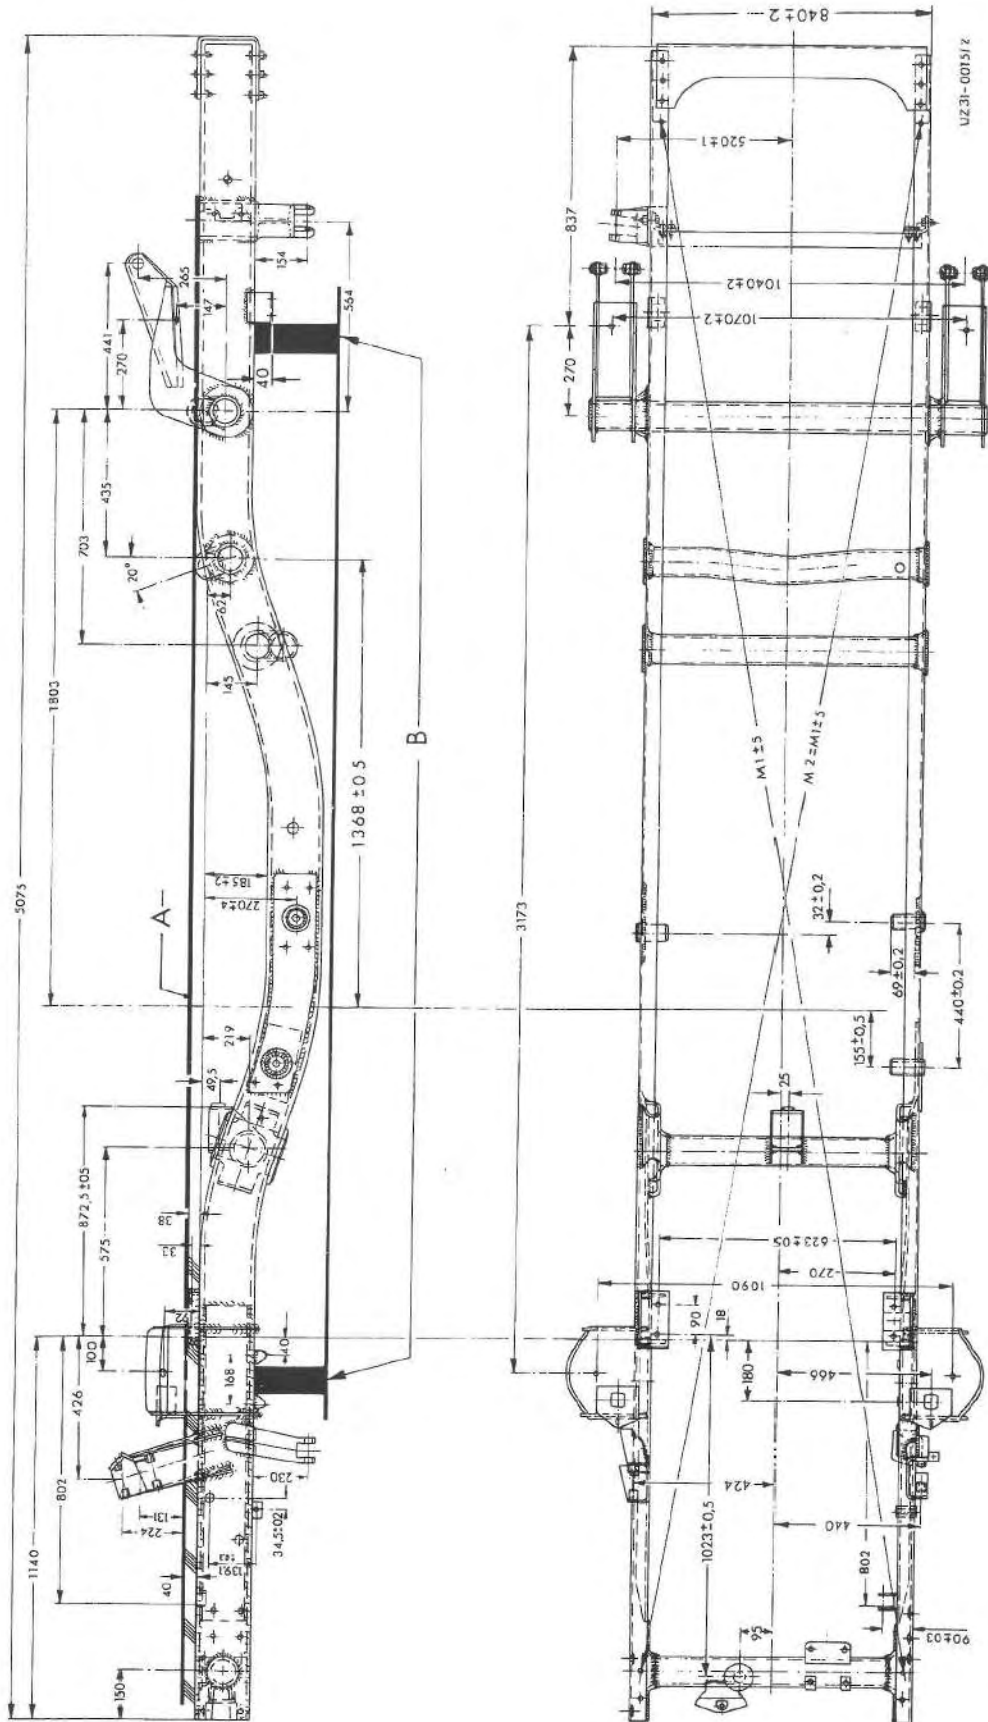

Frame 435.115 (SA)

- A Straight edge (beam test)
- B Supporting points

General view

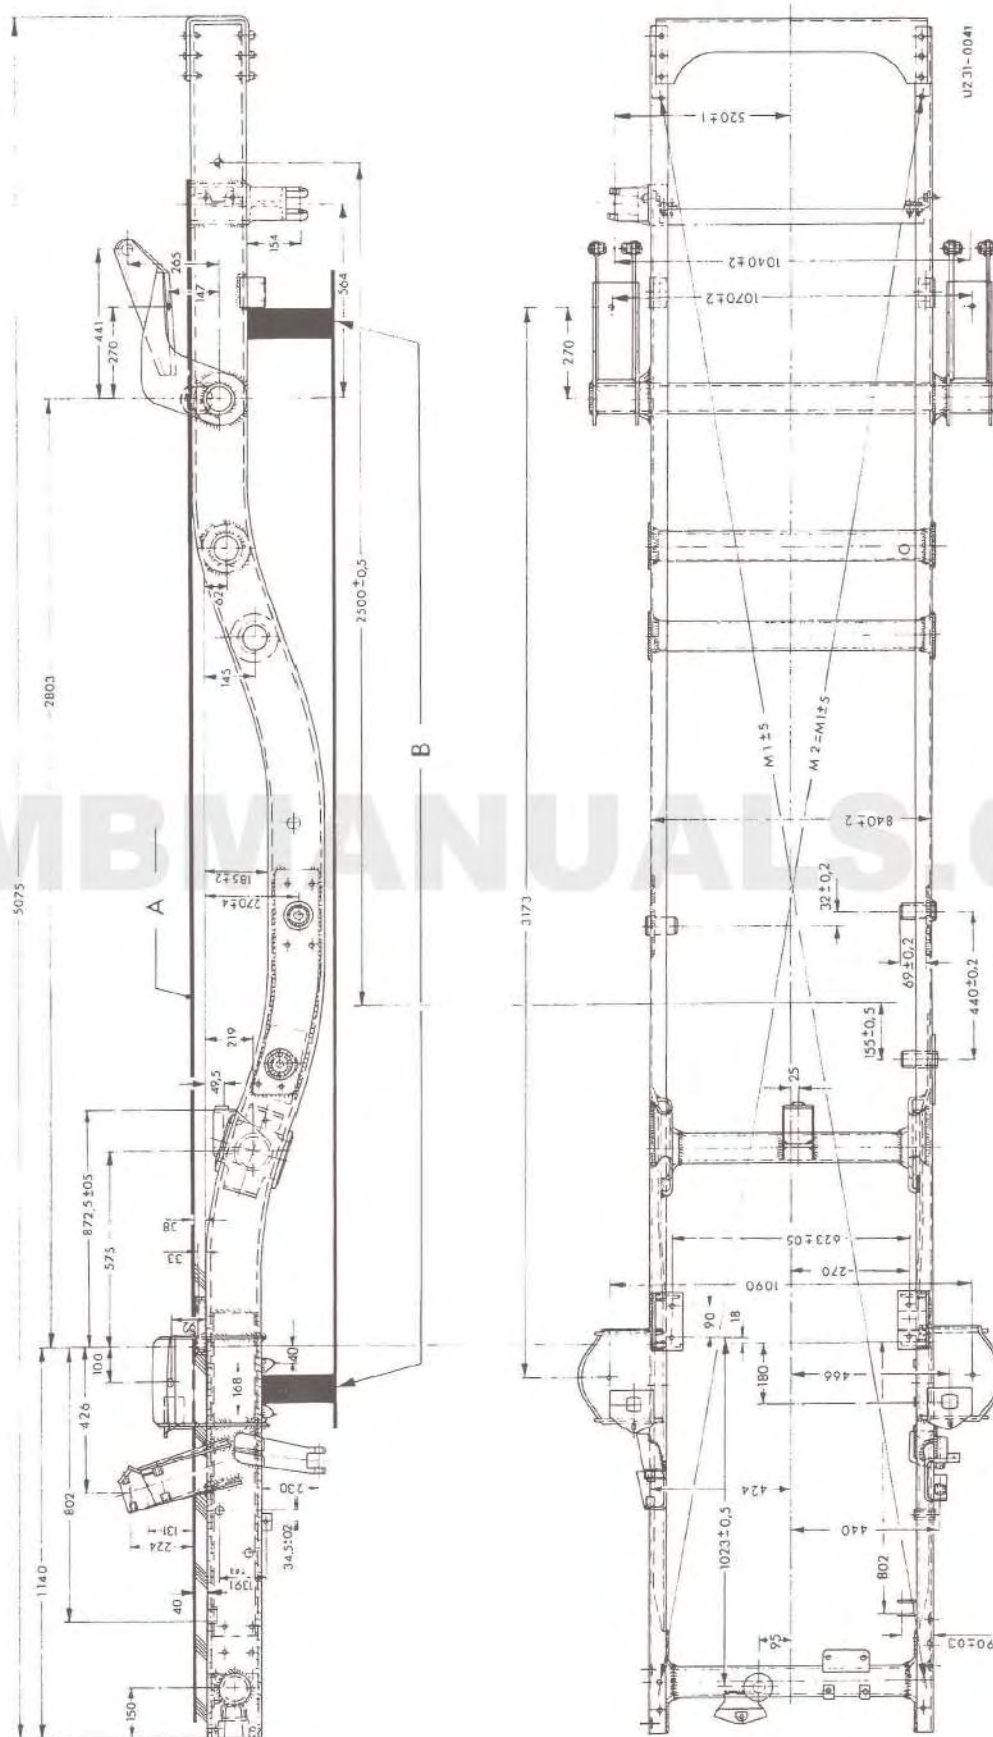


Frame 435.115 (SA)

Checking alignment


In event of frame damage, be sure to check all frame joints and parts for cracking. Frame repairs are permissible to a limited extent only. Straightening bent side and crossmembers is only permissible in the case of minor distortions.

- 1 Position frame on horizontal surface at supporting points.
- 2 Check dimensions according to 2.1/2.

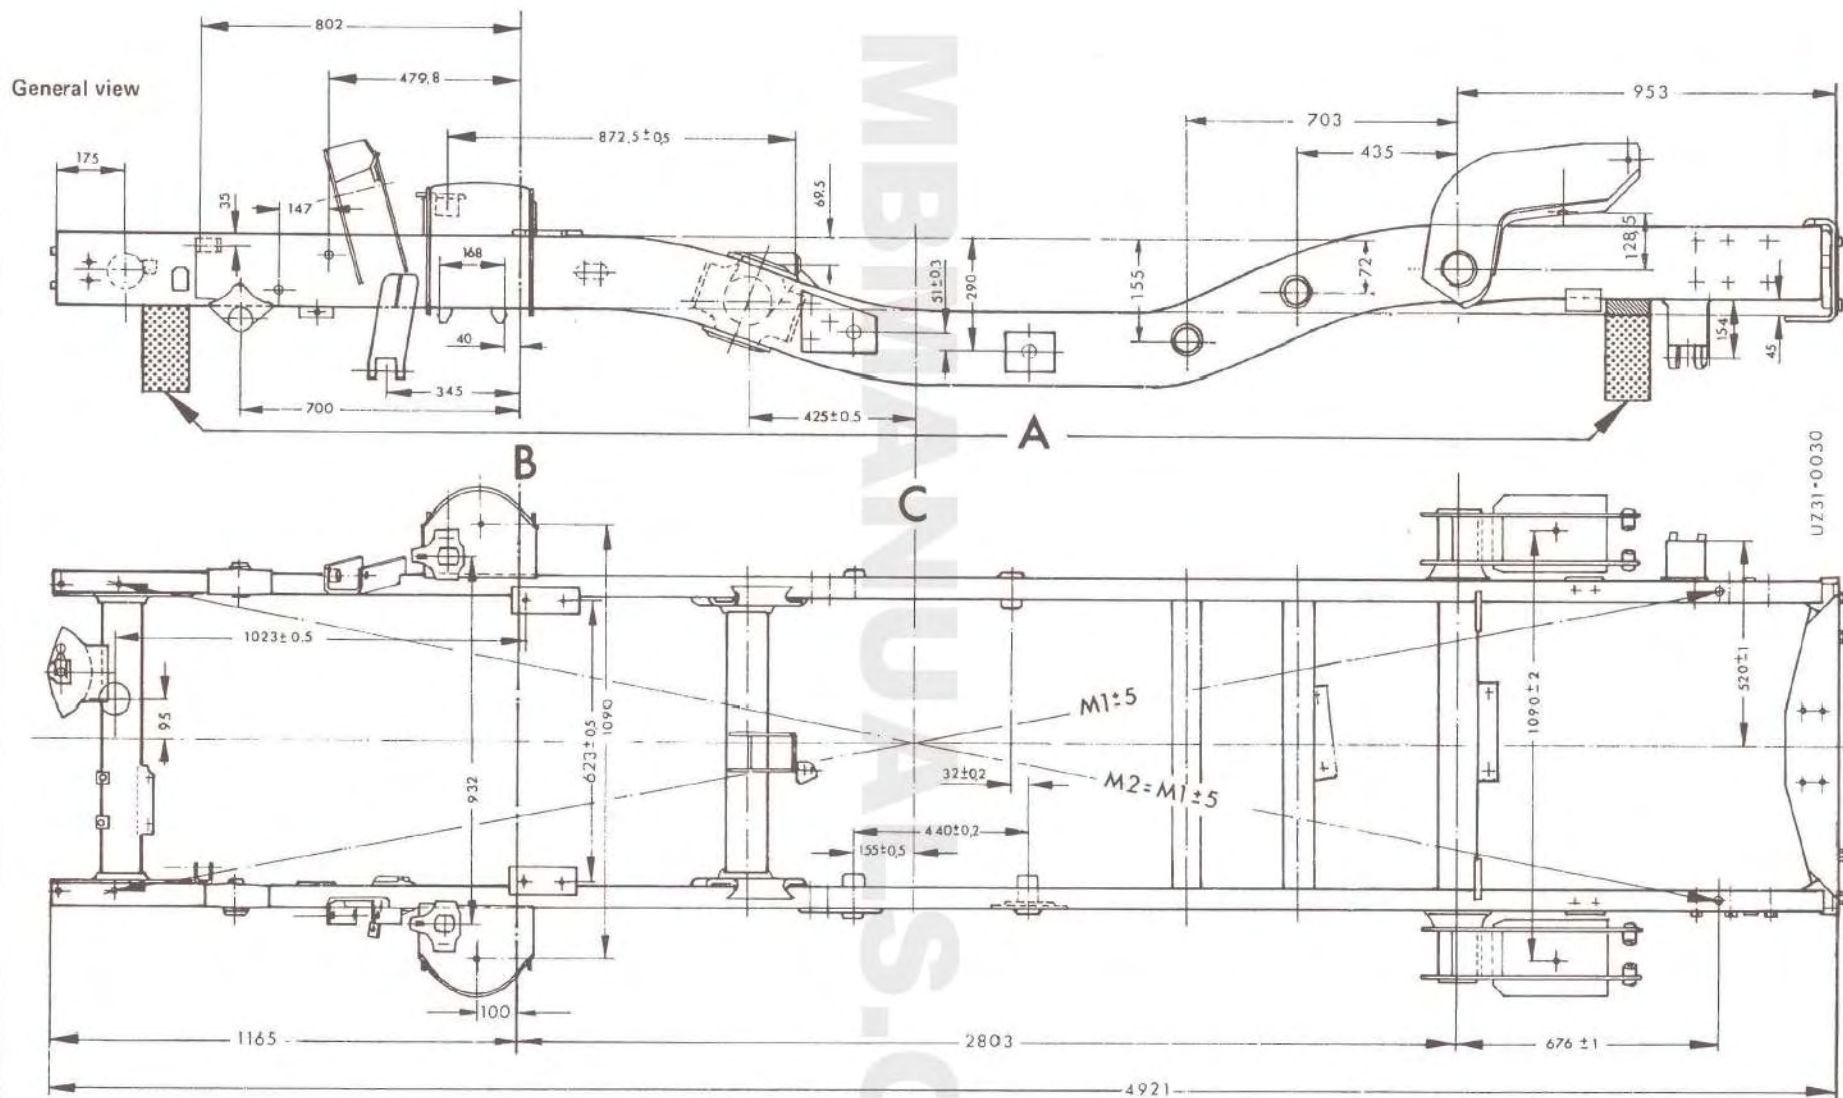


Frame 435.110

- A Supporting points
- B Rear edge engine
- C Cab O-line

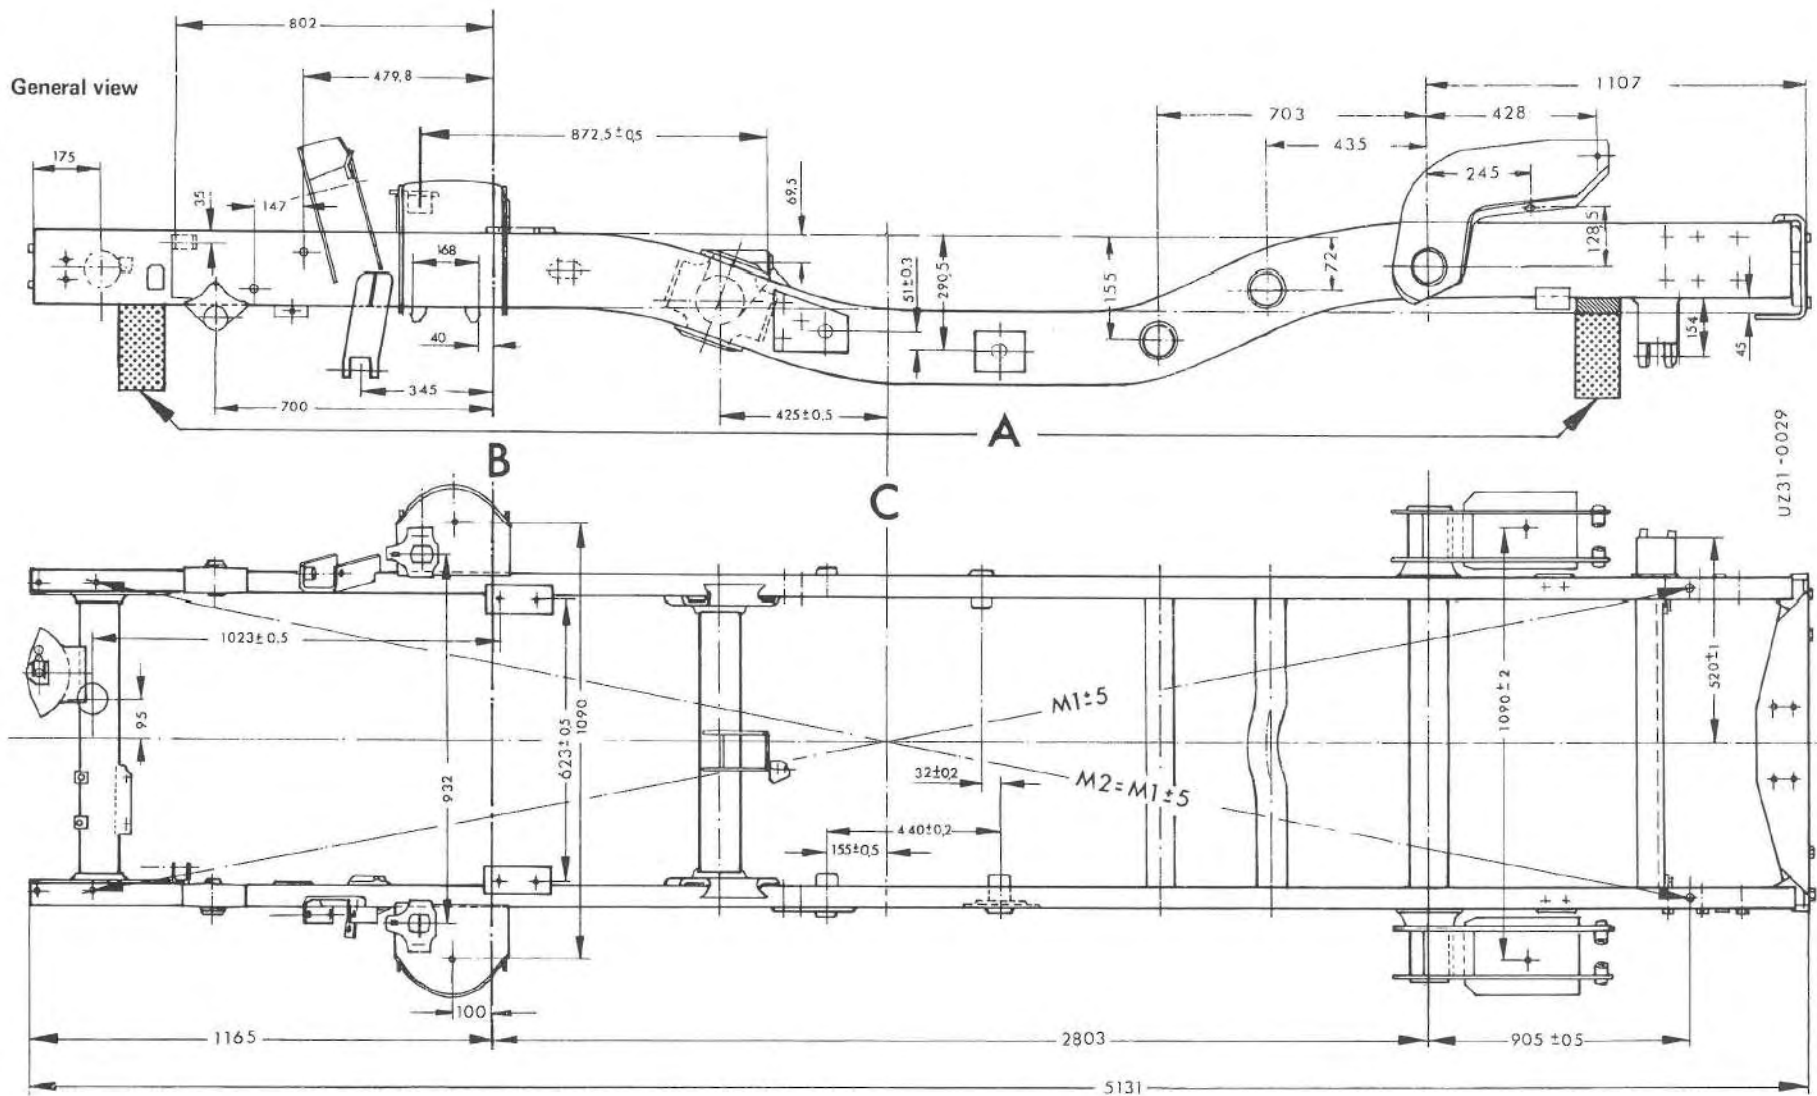**Frame 435.111**

- A Supporting points
- B Rear edge engine
- C Cab O-line

2.1/4

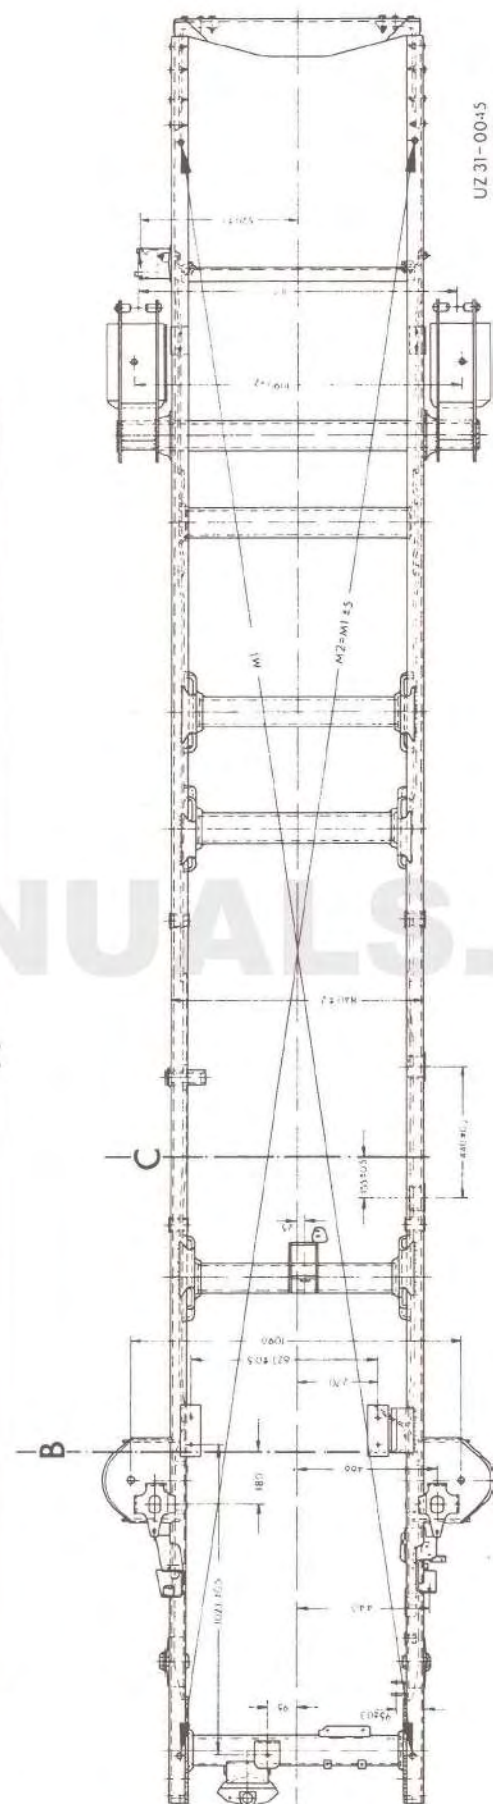

UZ 31-0045

Frame 435.113

Installation survey

Chassis Model	Sales designation	Trailer coupling Manufacturer	Type	Version	Installation
435.115	U 1300 L	Ringfeder Rockinger	RU wg K 1 D 383 G 110 A	automatic	SA 35 014
		Ringfeder	64 G 110		SA 35 245
		Ringfeder Rockinger	Unimot D 227 G 110 J		SA 35 365
		Ringfeder	64 G 135		SA 35 793
435.110 .111	U 1700 U 1700 L	Ringfeder	65 G 135		SA 35 014
		Ringfeder Rockinger	605 225 G 110		SA 35 365
		Ringfeder	64/G 135		SA 35 793

Technical data

The technical data relate solely to the trailer coupling, not to the vehicle.

RU wg

Size			K 1 D
Compatible drawbar eye			VG 74 057
Swing angles at drawbar eye	horizontal		90°
	vertical		45°
	axial		360°
at min. torque of 100 Nm			
Permissible drawbar rating (D rating)			4,2 t
Permissible drawbar load			0,4 t
Permissible trailer load			9,5 t
Design certificate			 F 3143
Weight			17 kg

Tightening torques

Designation	Thread	Nm
Mounting for trailer coupling	M 12	110
Drawbar eye	M 30	200 to 350

383 G 110 A

Compatible drawbar eye		VG 74 057
Swing angles at drawbar eye at min. torque of 100 Nm	horizontal	90°
	vertical	45°
	axial	360°
Permissible drawbar rating (D rating)		5.7 t
Permissible drawbar load		0.8 t
Permissible trailer load		10.5 t
Design certificate		 M 4020
Weight		17 kg

Tightening torques

Designation	Thread	Nm
Mounting for trailer coupling	M 12	86
Drawbar eye	M 30	min. 300

Type 64 G 110

Size		G 110
Compatible drawbar eye		DIN 74 054
Swing angles at drawbar eye at min. torque of 100 Nm	horizontal	80°
	vertical	25°
	axial	360°
Permissible drawbar rating (D rating)		6.5 t
Permissible drawbar load		0.5 t
Permissible trailer load		—
Design certificate		—
Weight		18 kg

Tightening torques

Designation	Thread	Nm
Mounting for trailer coupling	M 10	47
Drawbar eye	M 30	200 to 350

Type Unimog D

Size		110
Compatible drawbar eye		DIN 74 054
Swing angles at drawbar eye	horizontal	80°
	vertical	25°
at min. torque of 100 Nm	axial	360°
Permissible drawbar rating (D rating)		6.5 t
Permissible drawbar load		1.2 t
Permissible trailer load		10.5 t
Design certificate		 F 3025
Weight		15 kg

Tightening torques

Designation	Thread	Nm
Mounting for trailer coupling	M 10	47
Drawbar eye	M 30	200 to 350

Type 227/G 110 J

Size		G 110
Compatible drawbar eye		
Swing angles at drawbar eye	horizontal	90°
	vertical	45°
at min. torque of 100 Nm	axial	360°
Permissible drawbar rating (D rating)		6.6 t
Permissible drawbar load		1.25 t
Permissible trailer load		—
Design certificate		 M 3824
Weight		15 kg

Tightening torques

Designation	Thread	Nm
Mounting for trailer coupling	M 10	60
Drawbar eye	M 30	min. 300

65 G 135

Compatible drawbar eye		VG 74 057
Swing angles at drawbar eye at min. torque of 100 Nm	horizontal	90°
	vertical	45°
	axial	360°
Permissible drawbar rating (D rating)		6.0 t
Permissible drawbar load		0.6 t
Permissible trailer load		15.0 t
Design certificate		—
Weight		22.0 kg

Tightening torques

Designation	Thread	Nm
Mounting for trailer coupling	M 14	135

Type 605

Compatible drawbar eye	(DIN 74 054)	VG 74 057
Swing angles at drawbar eye at min. torques of 100 Nm	horizontal	80°
	vertical	25°
	axial	360°
Permissible drawbar rating (D rating)		8.5 t
Permissible drawbar load		1.5 t
Permissible trailer load		—
Design certificate		 F 3152
Weight		16 kg

Tightening torques

Designation	Thread	Nm
Mounting for trailer coupling	M 14	120
Drawbar eye	M 30	300 to 400

Type 225 G 110

Size	G 110	
Compatible drawbar eye for German British (SMMT No. 53) and Nato drawbar eye guaranteed		
Swing angles at drawbar eye	horizontal	—
	vertical	—
at min. torque of 100 Nm	axial	—
Permissible drawbar rating (D rating)	8.5 t	
Permissible drawbar load	1.5 t	
Permissible trailer load	—	
Design certificate	 M 3993	
Weight	18 kg	

Tightening torques

Designation	Thread	Nm
Mounting for trailer coupling	M 14	140
Drawbar eye	M 30	350 to 800

Type 64/G 135

Size	G 135	
Compatible drawbar eye	DIN 74 054	
Swing angles at drawbar eye	horizontal	95°
	vertical	20°
at min. torque of 100 Nm	axial	360°
Permissible drawbar rating (D rating)	7.5 t	
Permissible drawbar load	0.7 t	
Permissible trailer load	—	
Design certificate	 F 642	
Weight	25 kg	

Contents


Chapter	Page
1 General	
Installation survey	1.1/1
General view	1.1/1
Exploded view	1.2/1
2 Checking frame alignment	2.1/1

MBMANUALS.COM

Installation survey

Chassis		Frame Manufacturer	Installation	
Model	Sales designation		Standard	SA
435.115	U 1300 L	Daimler-Benz	X	35 999/01 and 03
435.117	U 1300 L/37			—

General view

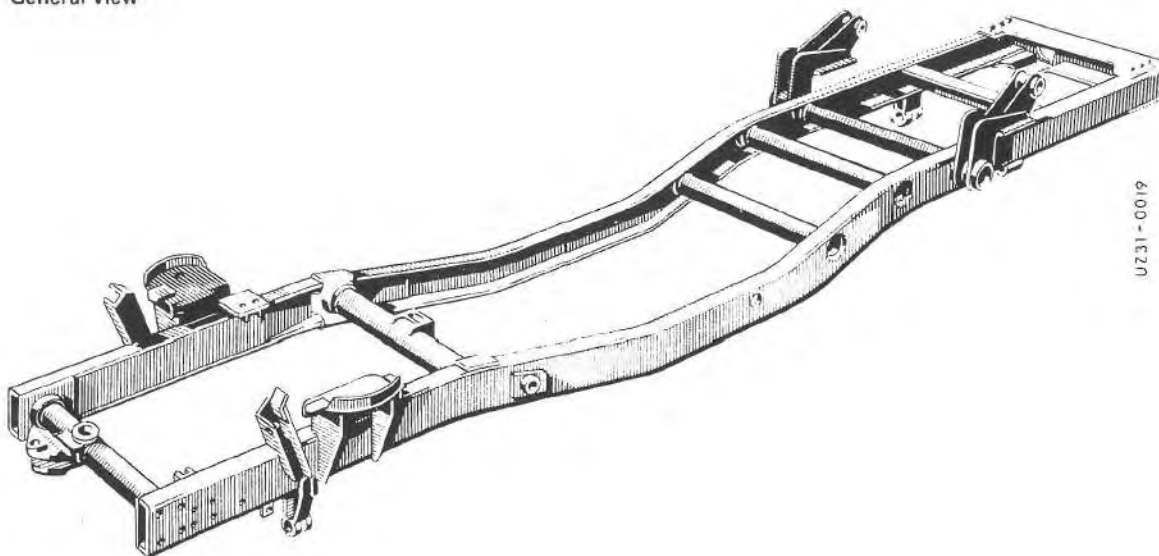

Frame (SA)

