


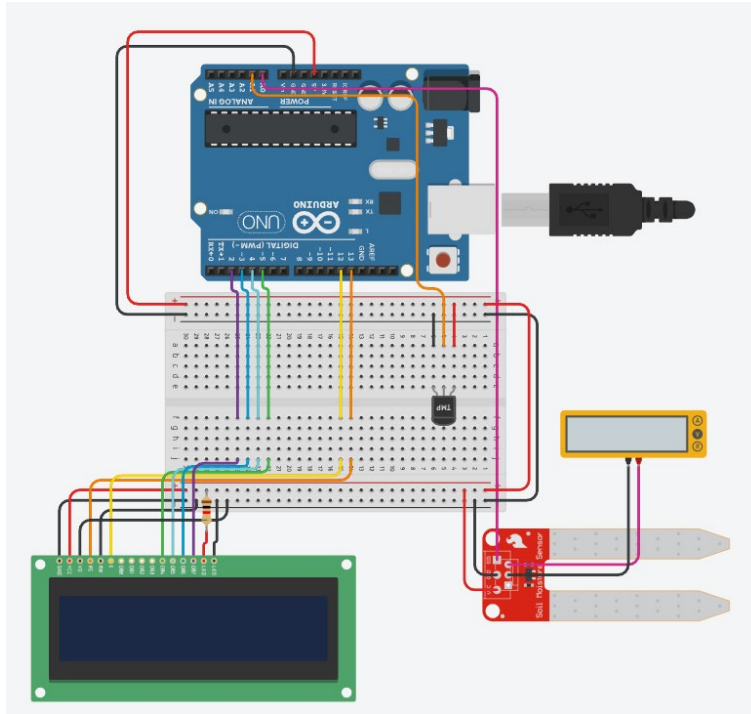

```
#include <LiquidCrystal.h>

LiquidCrystal lcd(13, 12, 5, 4, 3, 2); // RS, EN, D4, D5, D6, D7

void setup() {
  Serial.begin(9600);
  lcd.begin(16,2);
  lcd.print("Initializing...");
  delay(2000);
}

void loop() {
  int TempSen = analogRead(A1);
  float TempVolt = (TempSen / 1024.0) * 5.0;
  float TempVal = ((TempVolt - 0.5) * 100);
  Serial.print("=====\n");
  Serial.print("Temperature value: " + String(TempVal) + "\n");

  int MoisSen = analogRead(A0);
  float MoisVal = map(MoisSen, 0, 877, 0, 100);
  Serial.print("Moisture value: " + String(MoisVal) + "\n");

  lcd.clear();
  lcd.setCursor(0, 0);
  lcd.print("Temp: " + String(TempVal) + " C");

  lcd.setCursor(0, 1);
  lcd.print("Moist: " + String(MoisVal) + " %");
  delay(500);
}
```