



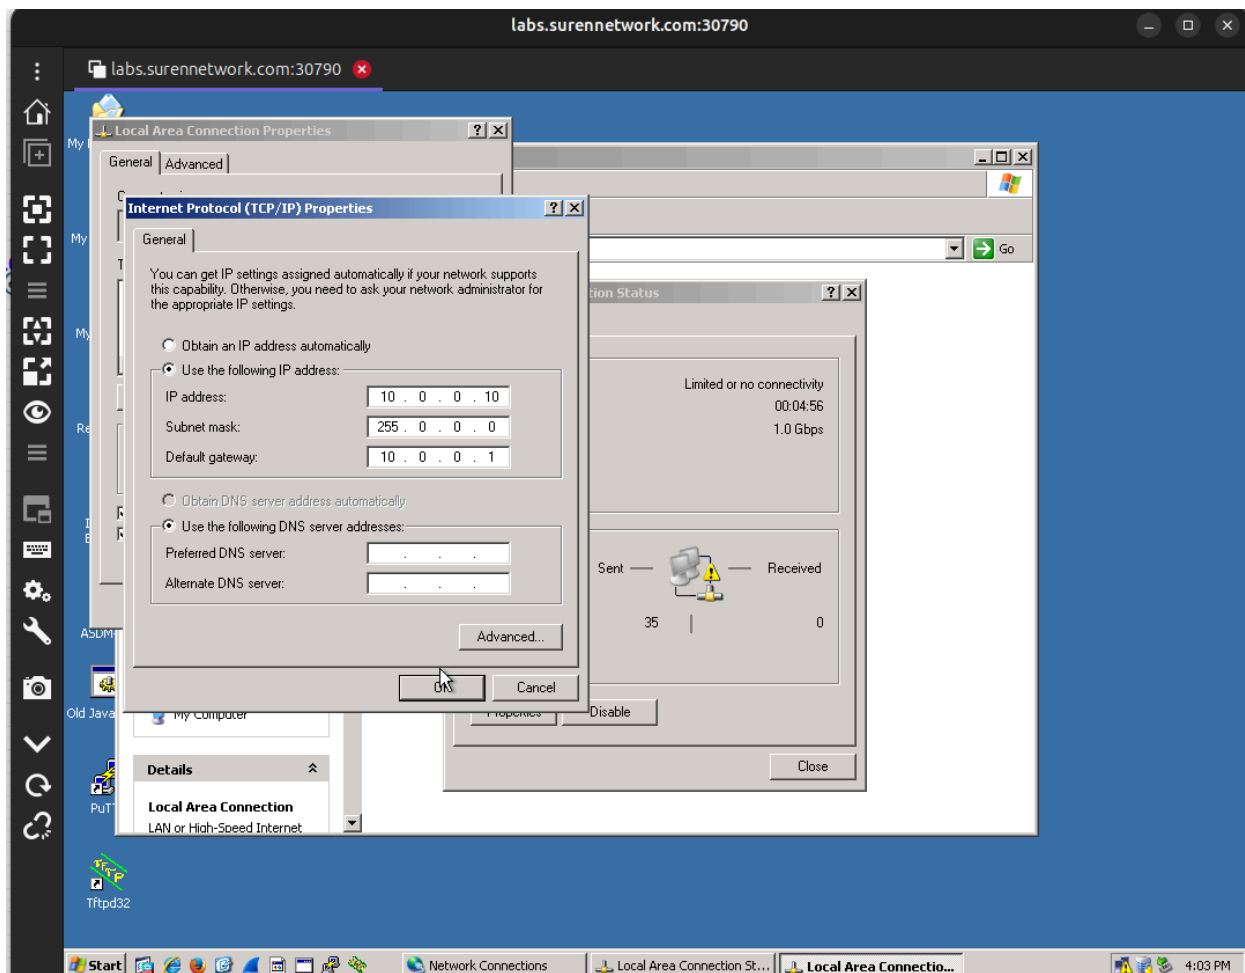

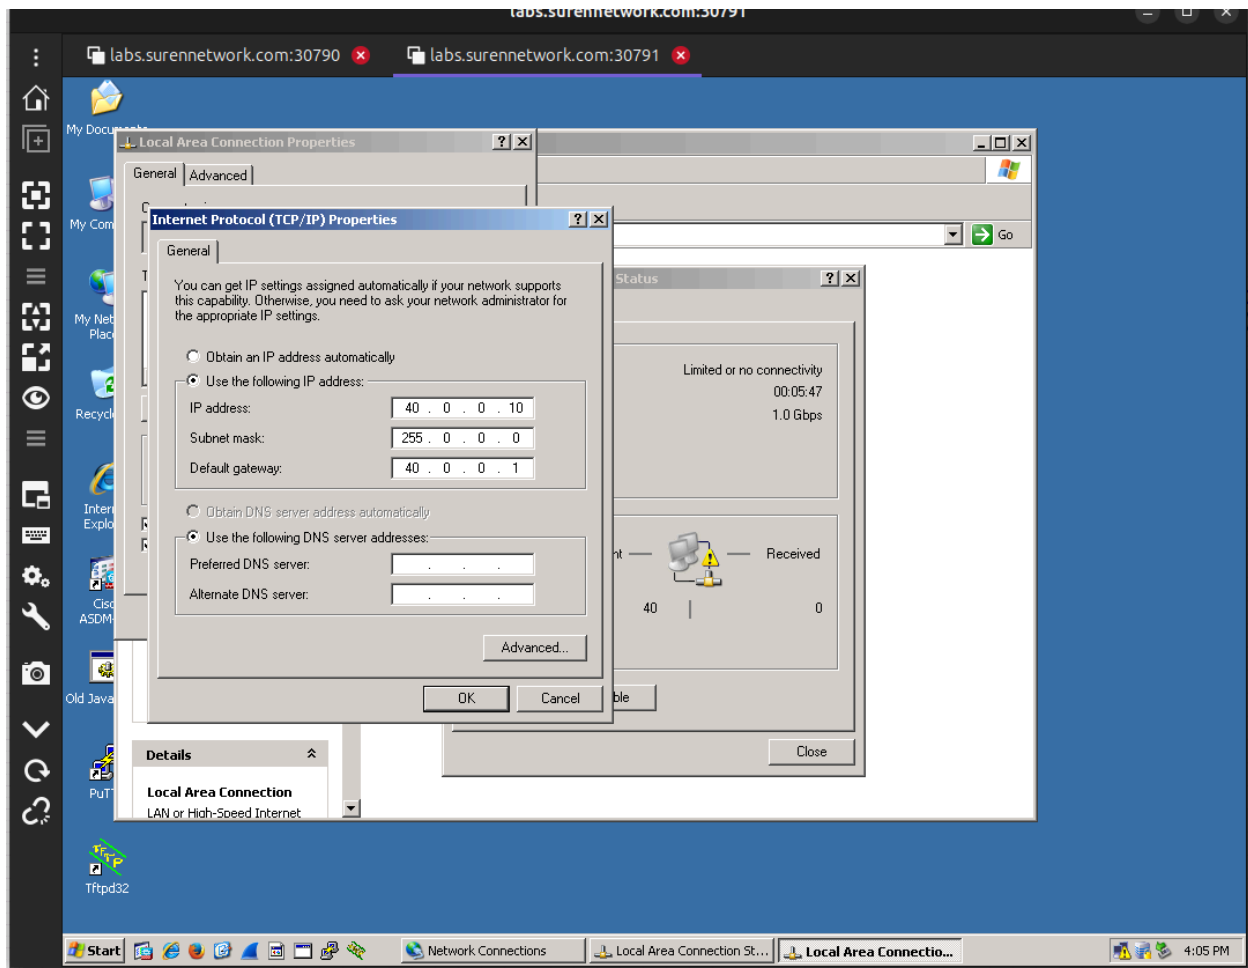

```

R1
R1(config-if)#exit
R1(config)#int e0/1
R1(config-if)#ip add 20.0.0.1 255.0.0.0
R1(config-if)#no sh
R1(config-if)#exit
R1(config)#exit
R1#
R1#
*Aug 22 15:08:06.454: %SYS-5-CONFIG_I: Configured from console by console
R1#show ip int brief
Interface          IP-Address      OK? Method Status      Protocol
Ethernet0/0        10.0.0.1        YES manual up          up
Ethernet0/1        20.0.0.1        YES manual up          up
Ethernet0/2        unassigned      YES TFTP  down        down
Ethernet0/3        unassigned      YES TFTP  down        down
R1#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

    10.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C       10.0.0.0/8 is directly connected, Ethernet0/0
L       10.0.0.1/32 is directly connected, Ethernet0/0
    20.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C       20.0.0.0/8 is directly connected, Ethernet0/1
L       20.0.0.1/32 is directly connected, Ethernet0/1
R1#

```

```
R1
R1(config)#ip route 30.0.0.0 255.0.0.0 20.0.0.2
R1(config)#ip route 40.0.0.0 255.0.0.0 20.0.0.2
*Aug 22 15:10:36.381: %PNP-6-PNP_DISCOVERY_STOPPED: PnP Discovery stopped (Config Wizard)
R1(config)#ip route 40.0.0.0 255.0.0.0 20.0.0.2
R1(config)#exit
R1#
*Aug 22 15:11:03.122: %SYS-5-CONFIG_I: Configured from console by console
R1#show ip int brief
Interface                IP-Address      OK? Method Status      Protocol
Ethernet0/0              10.0.0.1        YES manual up          up
Ethernet0/1              20.0.0.1        YES manual up          up
Ethernet0/2              unassigned      YES TFTP  down        down
Ethernet0/3              unassigned      YES TFTP  down        down
R1#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

    10.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C       10.0.0.0/8 is directly connected, Ethernet0/0
L       10.0.0.1/32 is directly connected, Ethernet0/0
    20.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C       20.0.0.0/8 is directly connected, Ethernet0/1
L       20.0.0.1/32 is directly connected, Ethernet0/1
S       30.0.0.0/8 [1/0] via 20.0.0.2
S       40.0.0.0/8 [1/0] via 20.0.0.2
R1#
```

```
R2
R2(config)#int e0/0
R2(config-if)#ip add 20.0.0.2
*Aug 22 15:12:20.974: %PNP-6-PNP_DISCOVERY_STOPPED: PnP Discovery stopped (Config Wizard)
R2(config-if)#ip add 20.0.0.2 255.0.0.0
R2(config-if)#no sh
R2(config-if)#exit
R2(config)#int e0/1
R2(config-if)#ip add 30.0.0.1 255.0.0.0
R2(config-if)#no sh
R2(config-if)#exit
R2(config)#exit
R2#
R2#
R2#
*Aug 22 15:13:13.349: %SYS-5-CONFIG_I: Configured from console by console
R2#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
        D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
        N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
        E1 - OSPF external type 1, E2 - OSPF external type 2
        i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
        ia - IS-IS inter area, * - candidate default, U - per-user static route
        o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
        a - application route
        + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

    20.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C       20.0.0.0/8 is directly connected, Ethernet0/0
L       20.0.0.2/32 is directly connected, Ethernet0/0
    30.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C       30.0.0.0/8 is directly connected, Ethernet0/1
L       30.0.0.1/32 is directly connected, Ethernet0/1
R2#
```

```
R2
L      30.0.0.1/32 is directly connected, Ethernet0/1
R2#conf t
Enter configuration commands, one per line. End with CNTL/Z.
R2(config)#ip route 10.0.0.0 255.0.0.0 20.0.0.
% Incomplete command.

R2(config)#ip route 10.0.0.0 255.0.0.0 20.0.0.1
R2(config)#ip route 40.0.0.0 255.0.0.0 30.0.0.2
R2(config)#
R2(config)#exit
R2#
*Aug 22 15:15:27.138: %SYS-5-CONFIG_I: Configured from console by console
R2#
R2#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

S      10.0.0.0/8 [1/0] via 20.0.0.1
      20.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C      20.0.0.0/8 is directly connected, Ethernet0/0
L      20.0.0.2/32 is directly connected, Ethernet0/0
      30.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C      30.0.0.0/8 is directly connected, Ethernet0/1
L      30.0.0.1/32 is directly connected, Ethernet0/1
S      40.0.0.0/8 [1/0] via 30.0.0.2
R2#
```

*Aug 22 15:17:44.789: %PNP-6-PNP_DISCOVERY_STOPPED: PnP Discovery stopped (Config Wizard)

R3(config)#int e0/1

R3(config-if)#ip add 30.0.0.2 255.0.0.0

R3(config-if)#no sh

R3(config-if)#exit

R3(config)#int e0/0

R3(config-if)#ip add 40.0.0.1 255.0.0.0

R3(config-if)#no sh

R3(config-if)#exit

R3(config)#exit

R3#

R3#

R3#

R3#

*Aug 22 15:18:22.192: %SYS-5-CONFIG_I: Configured from console by console

R3#show ip route

Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP

D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area

N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2

E1 - OSPF external type 1, E2 - OSPF external type 2

i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2

ia - IS-IS inter area, * - candidate default, U - per-user static route

o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP

a - application route

+ - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

30.0.0.0/8 is variably subnetted, 2 subnets, 2 masks

C 30.0.0.0/8 is directly connected, Ethernet0/1

L 30.0.0.2/32 is directly connected, Ethernet0/1

40.0.0.0/8 is variably subnetted, 2 subnets, 2 masks

C 40.0.0.0/8 is directly connected, Ethernet0/0

L 40.0.0.1/32 is directly connected, Ethernet0/0

R3#

```

R3
30.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    30.0.0.0/8 is directly connected, Ethernet0/1
L    30.0.0.2/32 is directly connected, Ethernet0/1
40.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    40.0.0.0/8 is directly connected, Ethernet0/0
L    40.0.0.1/32 is directly connected, Ethernet0/0
R3#conf t
Enter configuration commands, one per line. End with CNTL/Z.
R3(config)#ip route 20.0.0.0 255.0.0.0 30.0.0.1
R3(config)#ip route 10.0.0.0 255.0.0.0 30.0.0.1
R3(config)#exit
R3#
*Aug 22 15:20:24.931: %SYS-5-CONFIG_I: Configured from console by console
R3#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
        D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
        N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
        E1 - OSPF external type 1, E2 - OSPF external type 2
        i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
        ia - IS-IS inter area, * - candidate default, U - per-user static route
        o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
        a - application route
        + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

S    10.0.0.0/8 [1/0] via 30.0.0.1
S    20.0.0.0/8 [1/0] via 30.0.0.1
30.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    30.0.0.0/8 is directly connected, Ethernet0/1
L    30.0.0.2/32 is directly connected, Ethernet0/1
40.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    40.0.0.0/8 is directly connected, Ethernet0/0
L    40.0.0.1/32 is directly connected, Ethernet0/0
R3#

```

