




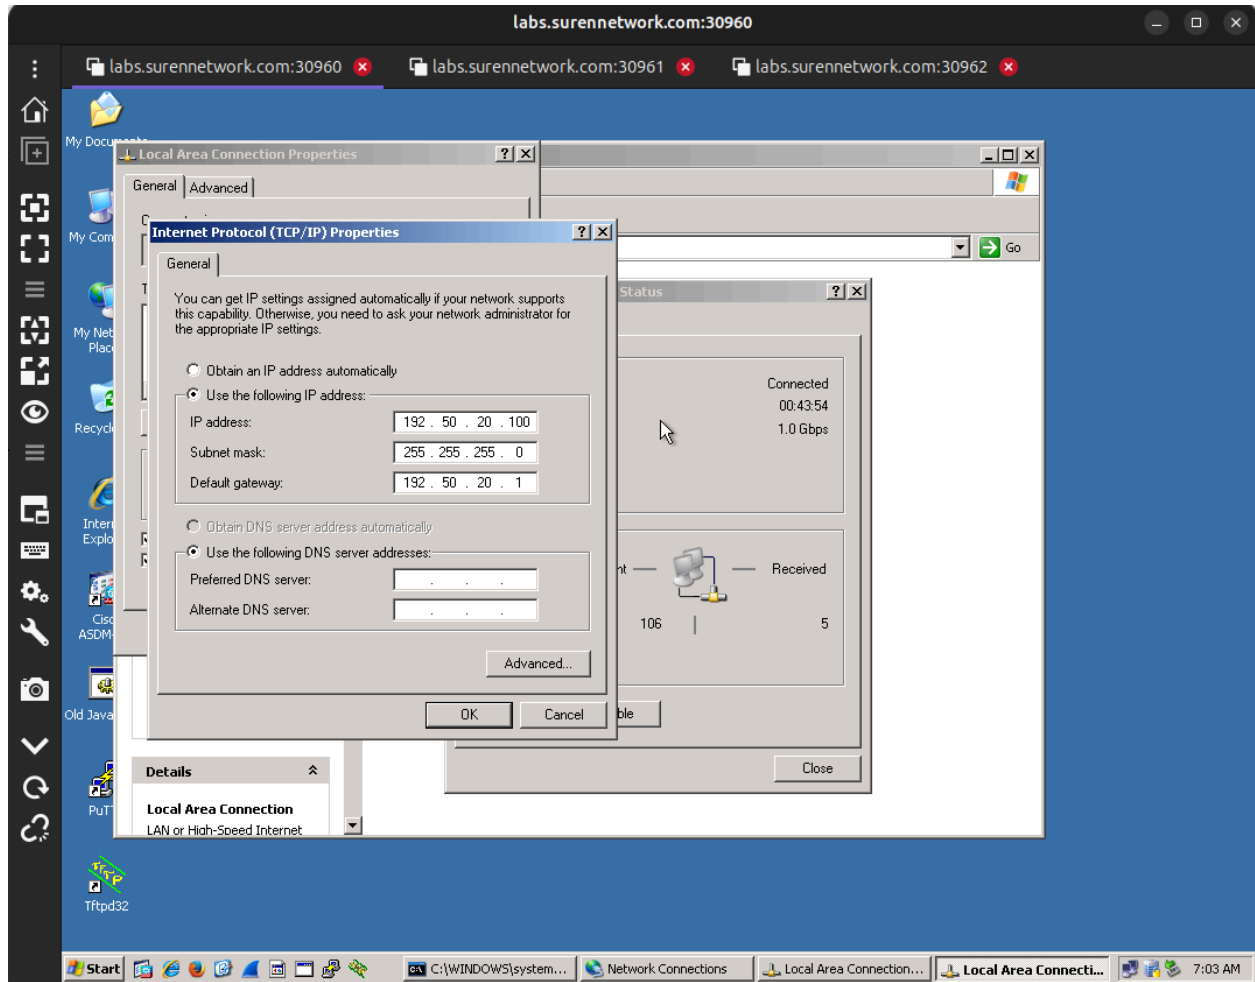

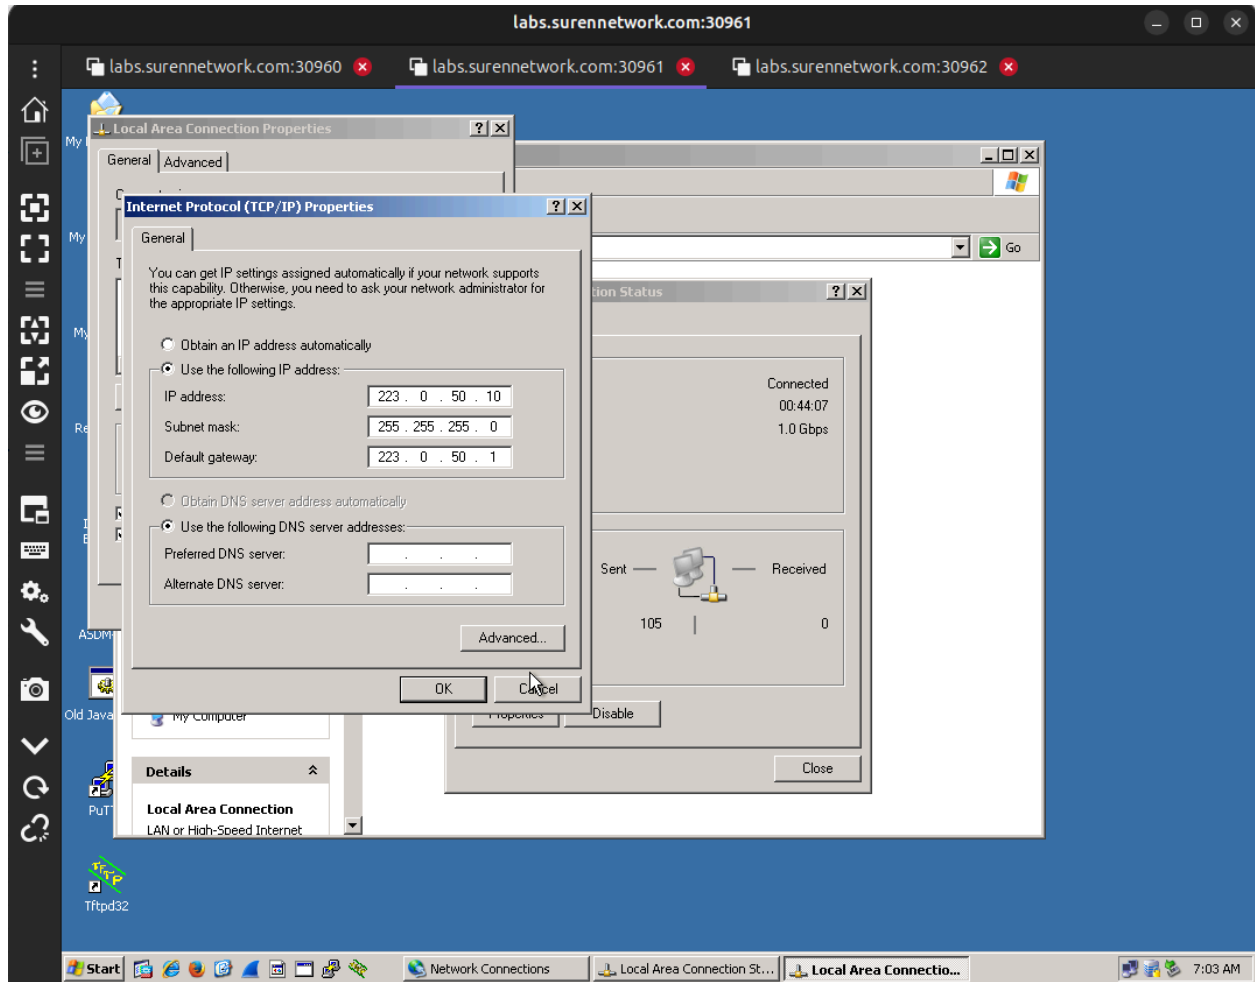

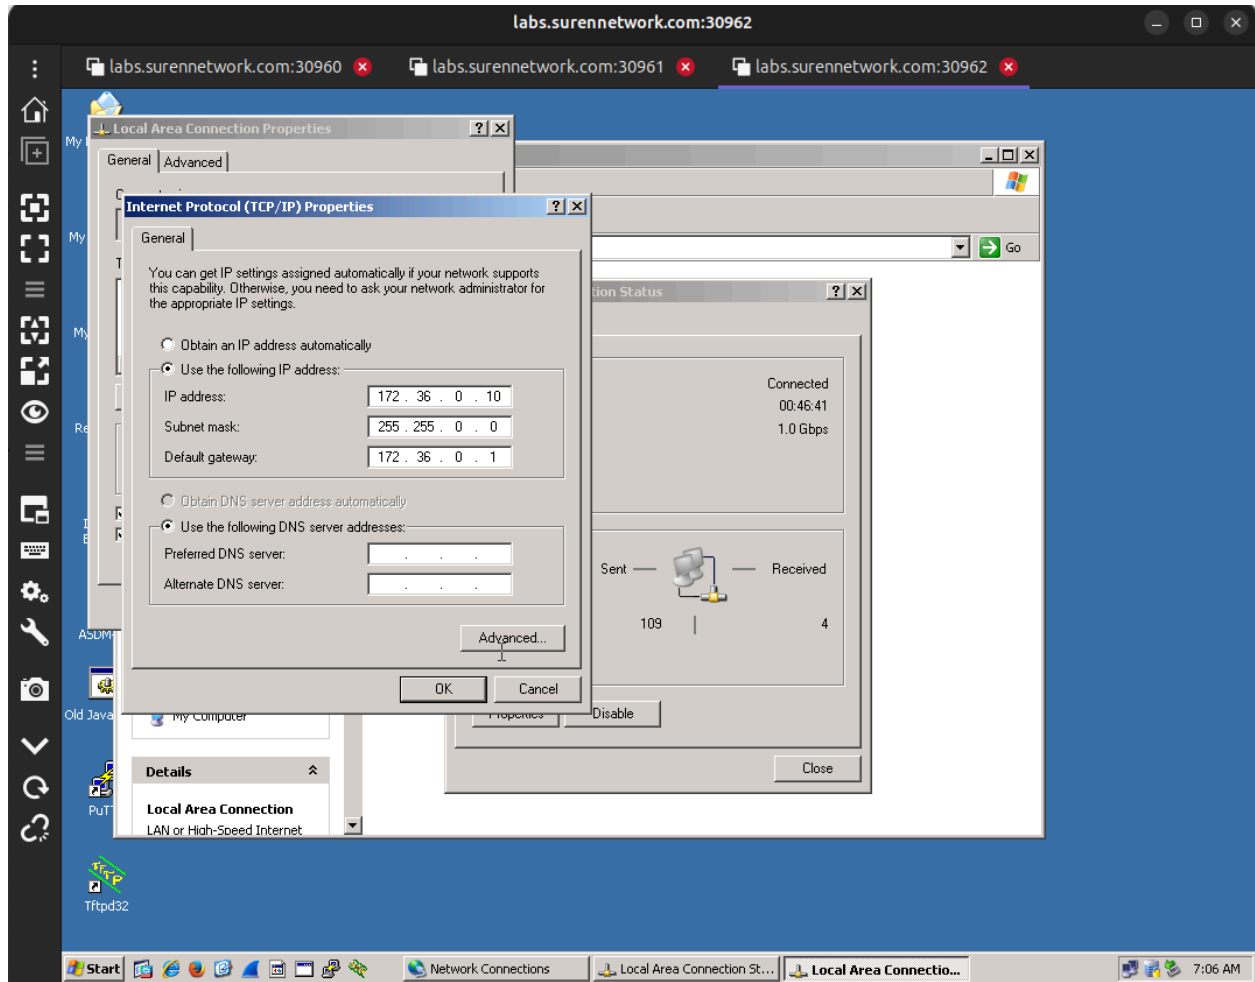

```
R1
R1(config)#ip route 172.36.0.0 255.255.0.0 12.0.0.2
R1(config)#ip route 223.0.50.0 255.255.255.0 12.0.0.2
R1(config)#
R1(config)#
R1(config)#exit
R1#
R1#
R1#
*Aug 26 05:46:09.760: %SYS-5-CONFIG_I: Configured from console by console
R1#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

    12.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C       12.0.0.0/8 is directly connected, Ethernet0/1
L       12.0.0.1/32 is directly connected, Ethernet0/1
S       23.0.0.0/8 [1/0] via 12.0.0.2
S       24.0.0.0/8 [1/0] via 12.0.0.2
S       26.0.0.0/8 [1/0] via 12.0.0.2
S       32.0.0.0/8 [1/0] via 12.0.0.2
S       45.0.0.0/8 [1/0] via 12.0.0.2
S       172.36.0.0/16 [1/0] via 12.0.0.2
    192.50.20.0/24 is variably subnetted, 2 subnets, 2 masks
C       192.50.20.0/24 is directly connected, Ethernet0/0
L       192.50.20.1/32 is directly connected, Ethernet0/0
S       223.0.50.0/24 [1/0] via 12.0.0.2
R1#
```

R2#

*Aug 26 05:45:50.542: %SYS-5-CONFIG_I: Configured from console by console

R2#show ip route

Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
ia - IS-IS inter area, * - candidate default, U - per-user static route
o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
a - application route
+ - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

```

    12.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C       12.0.0.0/8 is directly connected, Ethernet0/0
L       12.0.0.2/32 is directly connected, Ethernet0/0
    23.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C       23.0.0.0/8 is directly connected, Ethernet0/2
L       23.0.0.1/32 is directly connected, Ethernet0/2
    24.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C       24.0.0.0/8 is directly connected, Ethernet0/3
L       24.0.0.1/32 is directly connected, Ethernet0/3
    26.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C       26.0.0.0/8 is directly connected, Ethernet0/1
L       26.0.0.1/32 is directly connected, Ethernet0/1
S       32.0.0.0/8 [1/0] via 24.0.0.2
          [1/0] via 23.0.0.2
S       45.0.0.0/8 [1/0] via 24.0.0.2
          [1/0] via 23.0.0.2
S       172.36.0.0/16 [1/0] via 24.0.0.2
          [1/0] via 23.0.0.2
S       192.50.20.0/24 [1/0] via 12.0.0.1
S       223.0.50.0/24 [1/0] via 26.0.0.2
```

R2#

R3#

*Aug 26 05:45:28.567: %SYS-5-CONFIG_I: Configured from console by console

R3#show ip route

Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
ia - IS-IS inter area, * - candidate default, U - per-user static route
o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
a - application route
+ - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

```
S    12.0.0.0/8 [1/0] via 32.0.0.2
      [1/0] via 23.0.0.1
    23.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    23.0.0.0/8 is directly connected, Ethernet0/0
L    23.0.0.2/32 is directly connected, Ethernet0/0
S    24.0.0.0/8 [1/0] via 32.0.0.2
      [1/0] via 23.0.0.1
S    26.0.0.0/8 [1/0] via 32.0.0.2
      [1/0] via 23.0.0.1
    32.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    32.0.0.0/8 is directly connected, Ethernet0/1
L    32.0.0.1/32 is directly connected, Ethernet0/1
S    45.0.0.0/8 [1/0] via 32.0.0.2
      [1/0] via 23.0.0.1
S    172.36.0.0/16 [1/0] via 32.0.0.2
      [1/0] via 23.0.0.1
S    192.50.20.0/24 [1/0] via 32.0.0.2
      [1/0] via 23.0.0.1
S    223.0.50.0/24 [1/0] via 32.0.0.2
      [1/0] via 23.0.0.1
```

R3#

R4#

*Aug 26 05:45:09.549: %SYS-5-CONFIG_I: Configured from console by console

R4#show ip route

Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
ia - IS-IS inter area, * - candidate default, U - per-user static route
o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
a - application route
+ - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

```
S    12.0.0.0/8 [1/0] via 45.0.0.2
      [1/0] via 24.0.0.1
S    23.0.0.0/8 [1/0] via 45.0.0.2
      [1/0] via 24.0.0.1
24.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    24.0.0.0/8 is directly connected, Ethernet0/0
L    24.0.0.2/32 is directly connected, Ethernet0/0
S    26.0.0.0/8 [1/0] via 45.0.0.2
      [1/0] via 24.0.0.1
S    32.0.0.0/8 [1/0] via 45.0.0.2
      [1/0] via 24.0.0.1
45.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    45.0.0.0/8 is directly connected, Ethernet0/1
L    45.0.0.1/32 is directly connected, Ethernet0/1
S    172.36.0.0/16 [1/0] via 45.0.0.2
      [1/0] via 24.0.0.1
S    192.50.20.0/24 [1/0] via 45.0.0.2
      [1/0] via 24.0.0.1
S    223.0.50.0/24 [1/0] via 45.0.0.2
      [1/0] via 24.0.0.1
```

R4#

*Aug 26 05:44:47.549: %SYS-5-CONFIG_I: Configured from console by console

R5#show ip route

Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
ia - IS-IS inter area, * - candidate default, U - per-user static route
o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
a - application route
+ - replicated route, % - next hop override, p - overrides from PFR

Gateway of last resort is not set

```
S    12.0.0.0/8 [1/0] via 45.0.0.1
      [1/0] via 32.0.0.1
S    23.0.0.0/8 [1/0] via 45.0.0.1
      [1/0] via 32.0.0.1
S    24.0.0.0/8 [1/0] via 45.0.0.1
      [1/0] via 32.0.0.1
S    26.0.0.0/8 [1/0] via 45.0.0.1
      [1/0] via 32.0.0.1
    32.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    32.0.0.0/8 is directly connected, Ethernet0/1
L    32.0.0.2/32 is directly connected, Ethernet0/1
    45.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    45.0.0.0/8 is directly connected, Ethernet0/2
L    45.0.0.2/32 is directly connected, Ethernet0/2
    172.36.0.0/16 is variably subnetted, 2 subnets, 2 masks
C    172.36.0.0/16 is directly connected, Ethernet0/0
L    172.36.0.1/32 is directly connected, Ethernet0/0
S    192.50.20.0/24 [1/0] via 45.0.0.1
      [1/0] via 32.0.0.1
S    223.0.50.0/24 [1/0] via 45.0.0.1
      [1/0] via 32.0.0.1
```

R5#

```
R6
R6(config)#ip route 192.50.20.0 255.255.255.0 26.0.0.1
R6(config)#
R6(config)#exit
R6#
*Aug 26 05:44:28.156: %SYS-5-CONFIG_I: Configured from console by console
R6#
*Aug 26 05:44:40.410: %PNP-6-PNP_DISCOVERY_STOPPED: PnP Discovery stopped (Config Wizard)
R6#
R6#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

S    12.0.0.0/8 [1/0] via 26.0.0.1
S    23.0.0.0/8 [1/0] via 26.0.0.1
S    24.0.0.0/8 [1/0] via 26.0.0.1
S    26.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C      26.0.0.0/8 is directly connected, Ethernet0/1
L      26.0.0.2/32 is directly connected, Ethernet0/1
S    32.0.0.0/8 [1/0] via 26.0.0.1
S    45.0.0.0/8 [1/0] via 26.0.0.1
S    172.36.0.0/16 [1/0] via 26.0.0.1
S    192.50.20.0/24 [1/0] via 26.0.0.1
S    223.0.50.0/24 is variably subnetted, 2 subnets, 2 masks
C      223.0.50.0/24 is directly connected, Ethernet0/0
L      223.0.50.1/32 is directly connected, Ethernet0/0
R6#
```

