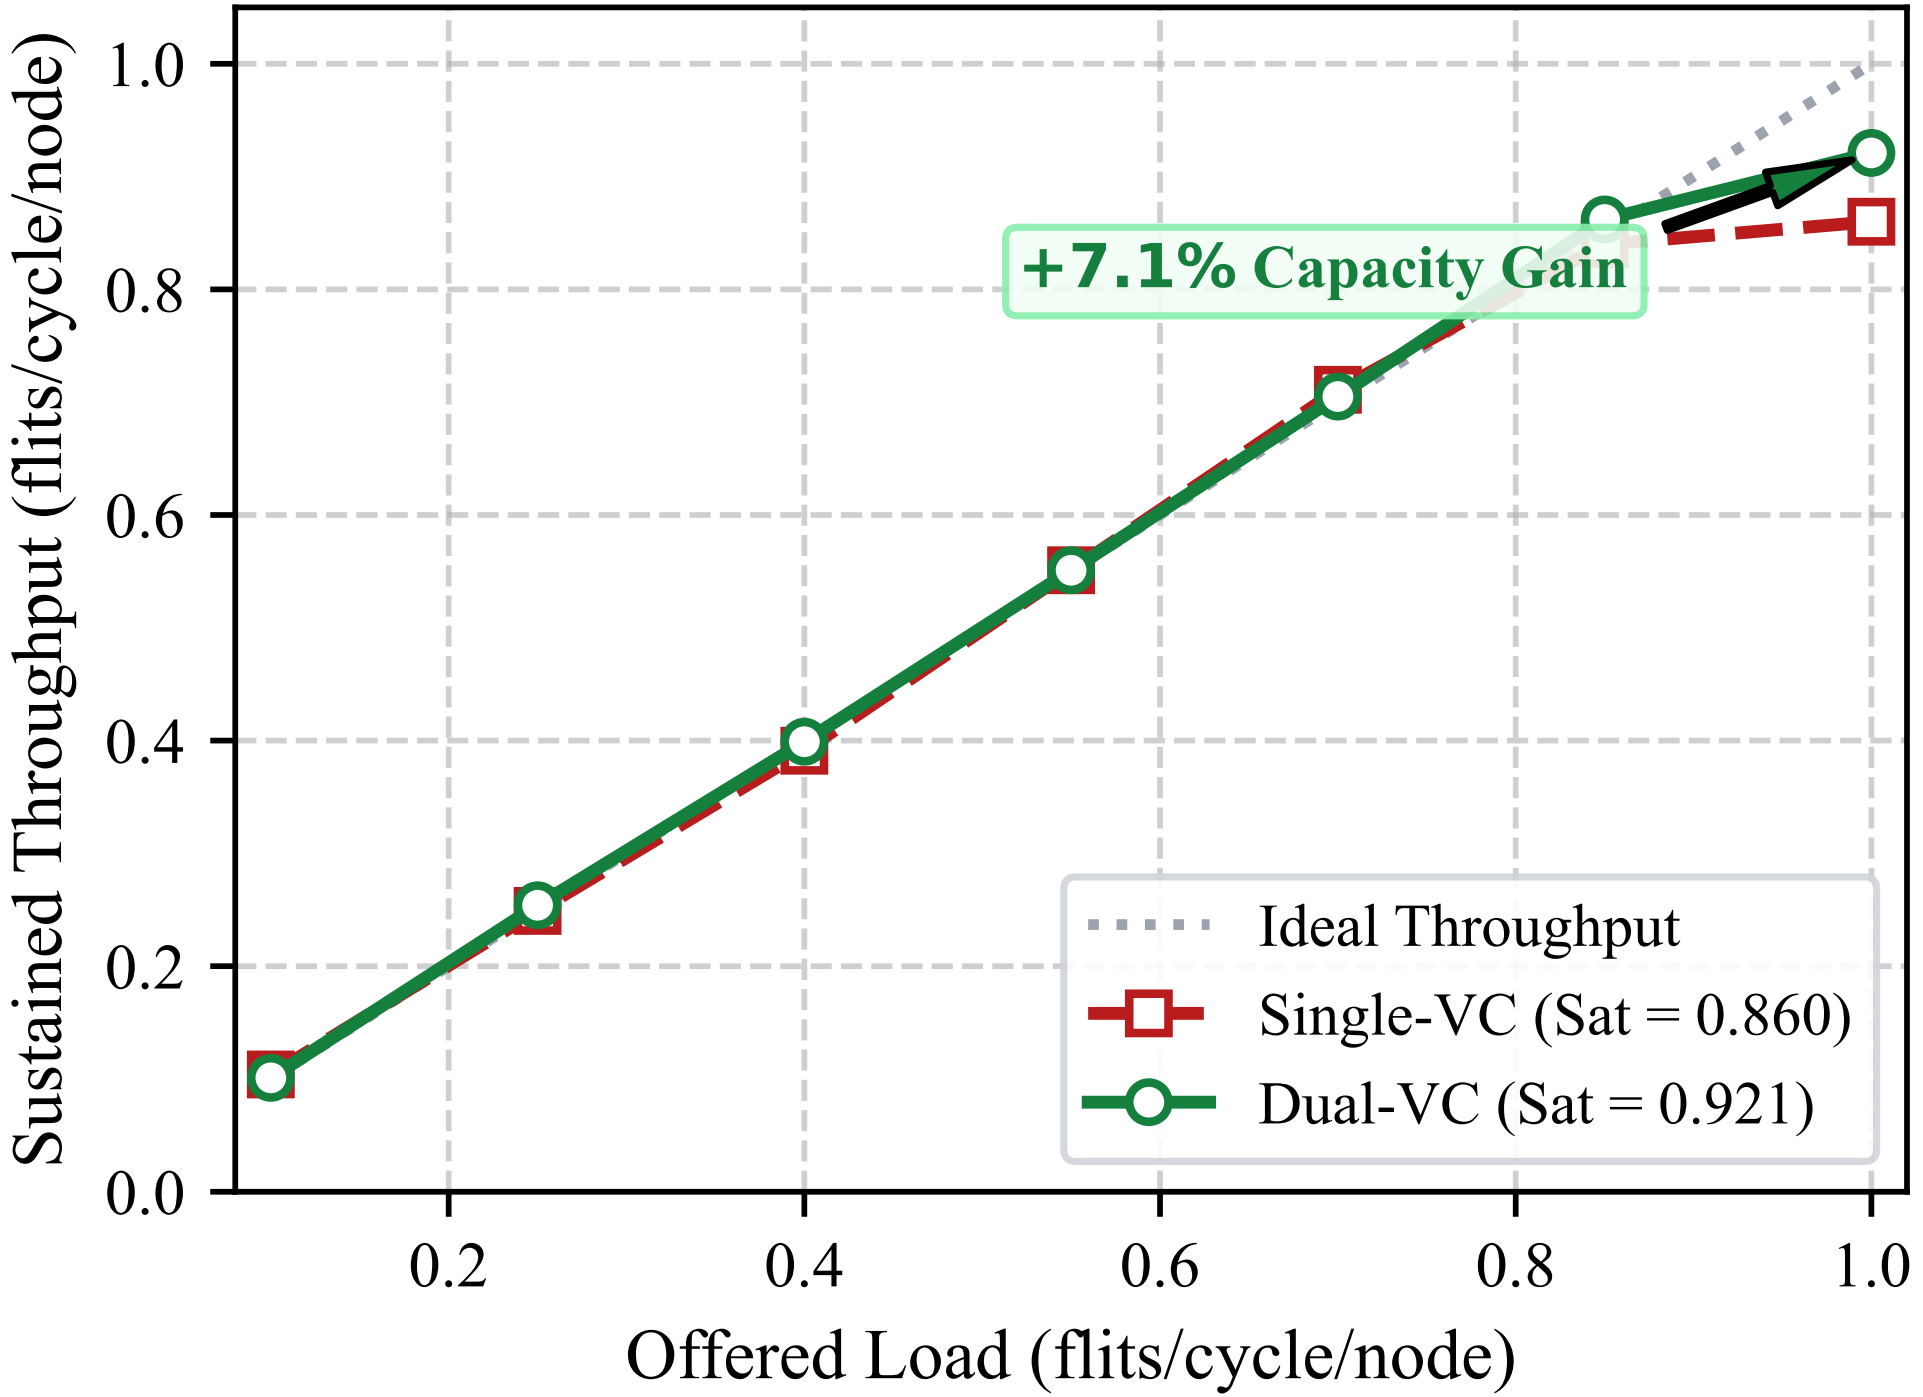
Sustained Throughput (flits/cycle/node)
Offered Load (flits/cycle/node)
0.0
0.2
0.4
0.6
0.8
1.0
+7.1% Capacity Gain
Ideal Throughput
Single-VC (Sat = 0.860)
Dual-VC (Sat = 0.921)