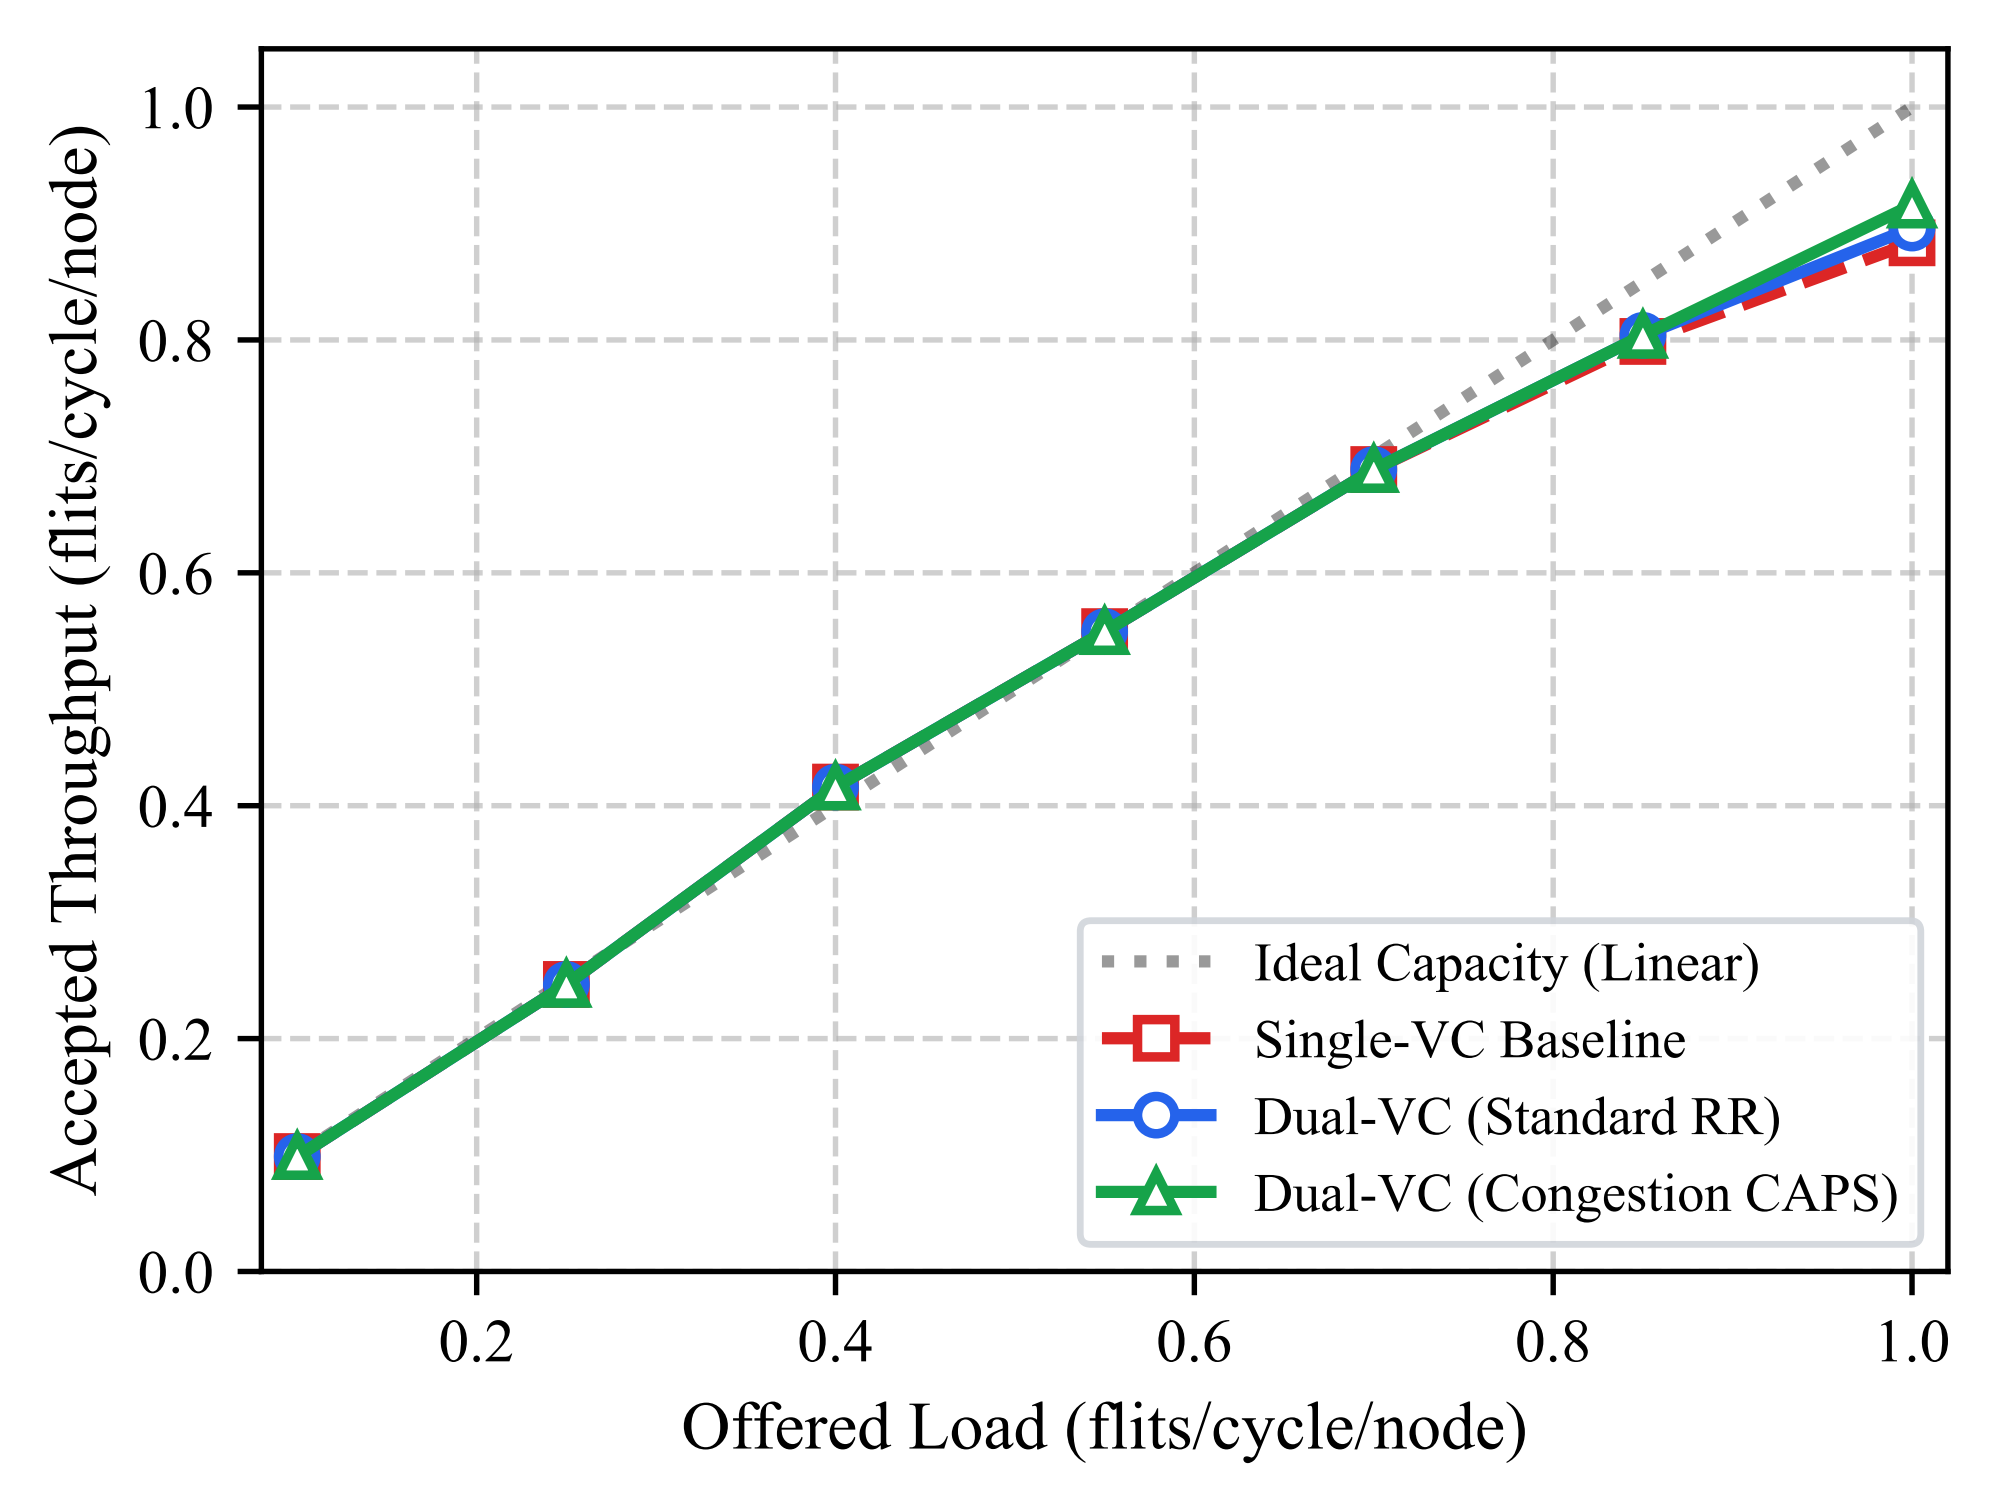
Accepted Throughput (flits/cycle/node)
Offered Load (flits/cycle/node)
0.0
0.2
0.4
0.6
0.8
1.0
0.2
0.4
0.6
0.8
1.0
Ideal Capacity (Linear)
Single-VC Baseline
Dual-VC (Standard RR)
Dual-VC (Congestion CAPS)