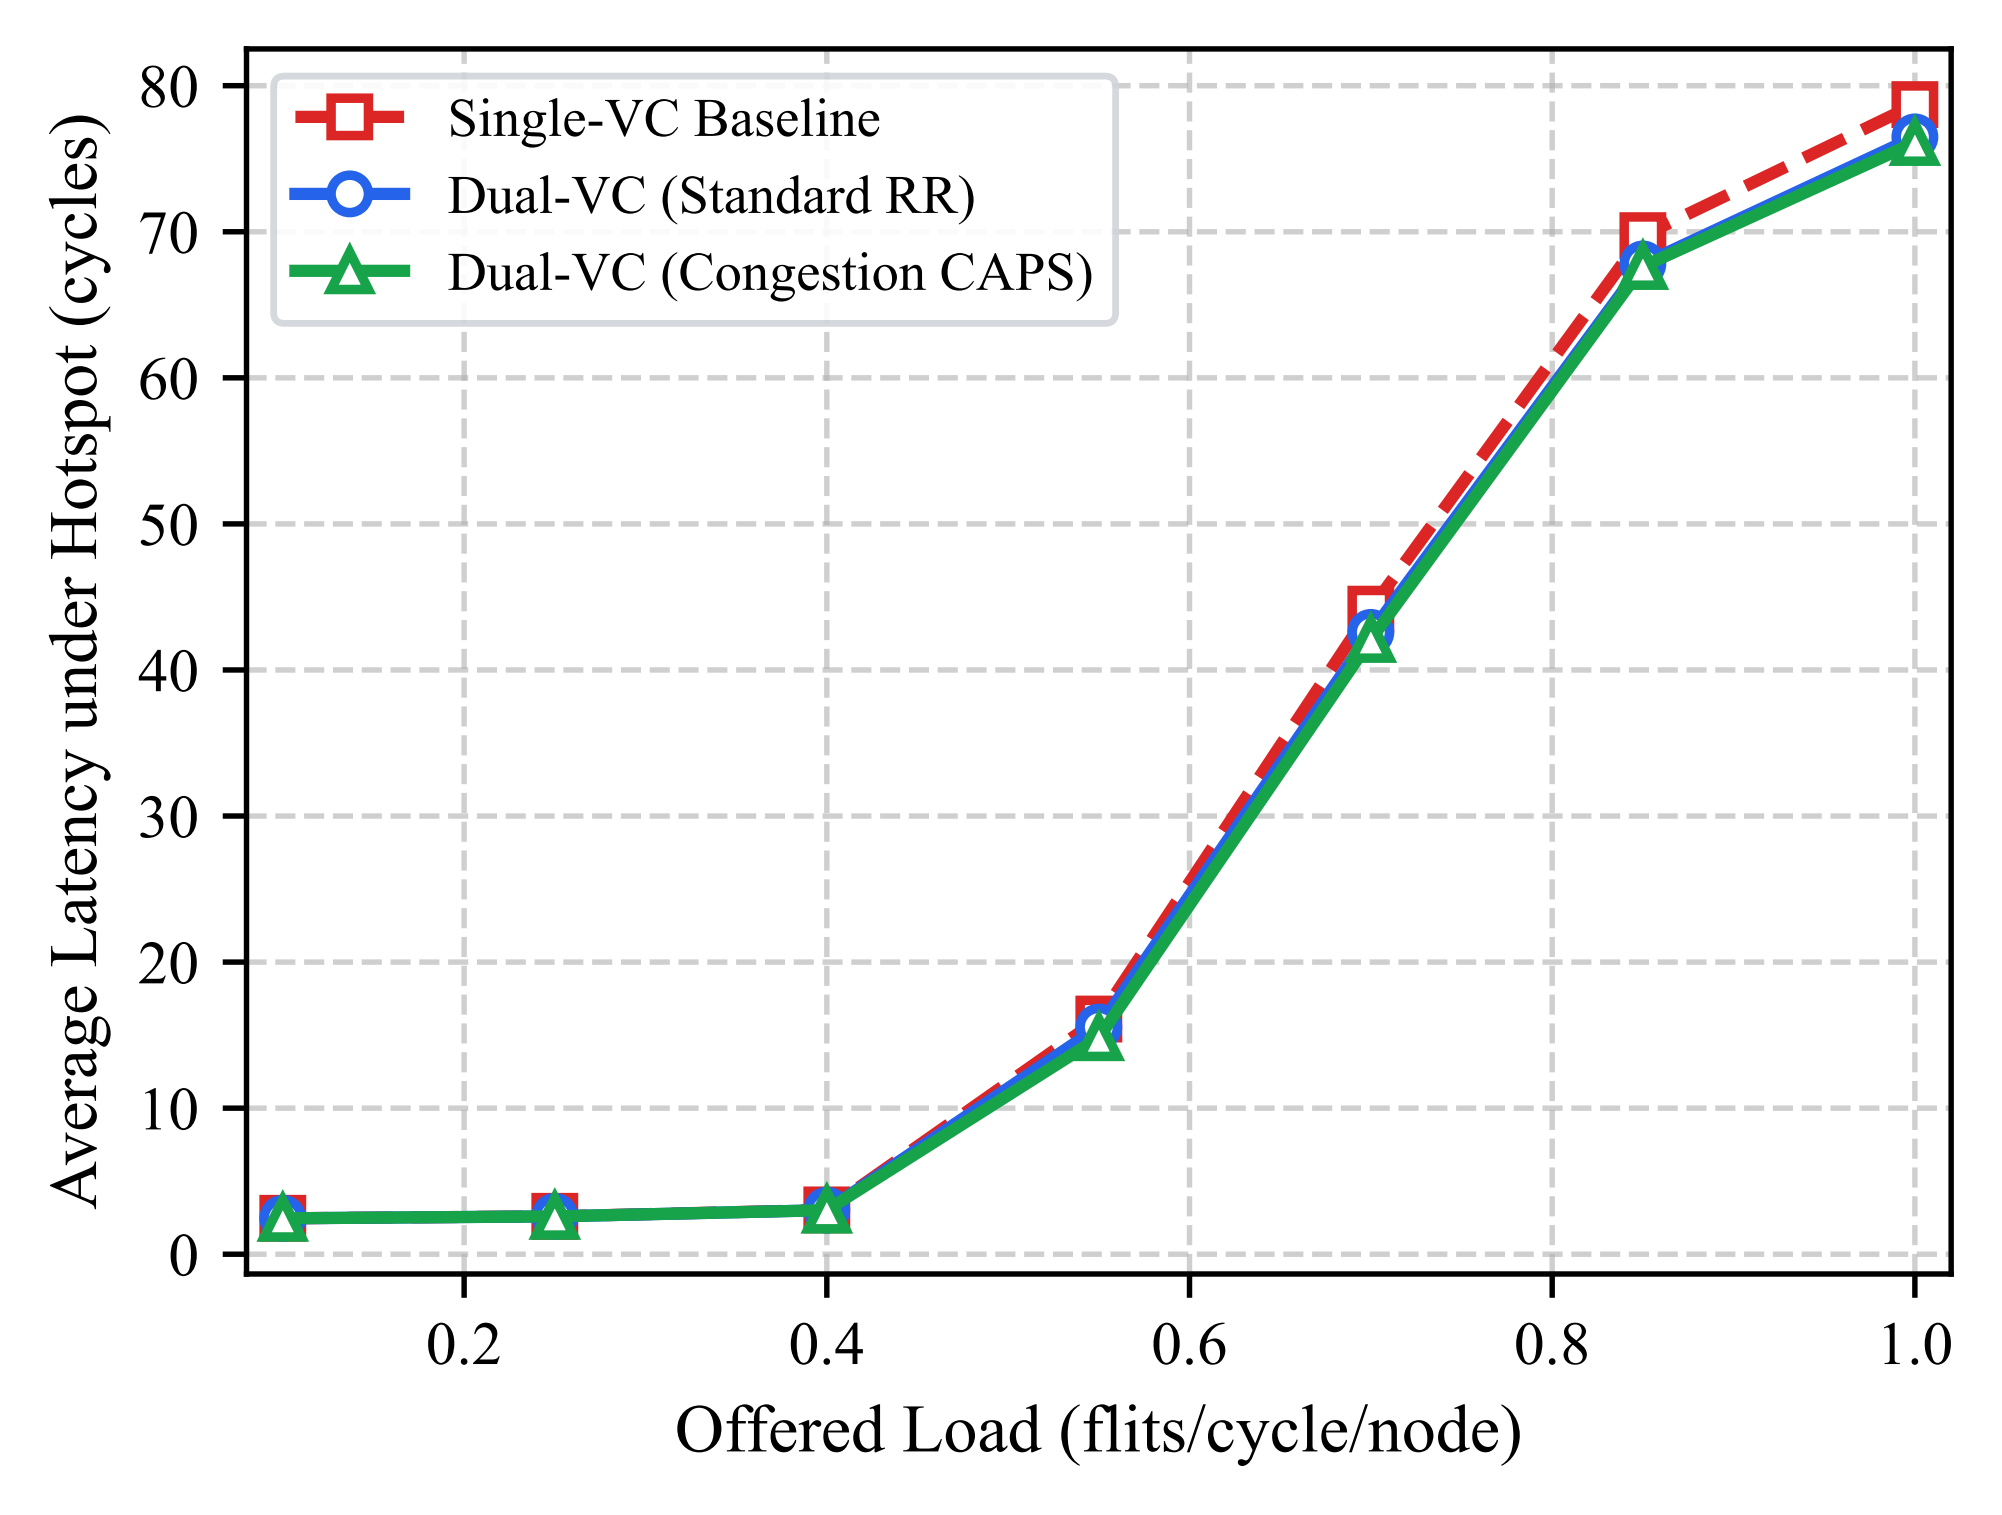
Single-VC Baseline
Dual-VC (Standard RR)
Dual-VC (Congestion CAPS)
Average Latency under Hotspot (cycles)
Offered Load (flits/cycle/node)
0
10
20
30
40
50
60
70
80
0.2
0.4
0.6
0.8
1.0