

PRACTICAL - 3CISCO PACKET TRACERAIM:-

To study the Packet tracer tool Installation and User Interface Overview.

1) From the network component box, click and drag and drop the below components:

a) 4 Generic PCs and One Hub


b) 4 Generic PCs and one Switch

2) Click on connections:


a) Click on Copper - Straight-through cable.

b) Select one of the PC and connect it to HUB using the cable. The link LED should glow in green, indicating that the link is up. Similarly, connect remaining 3 PC's to the HUB.

c) Similarly connect 4 PC's to the Switch using copper straight through cable.

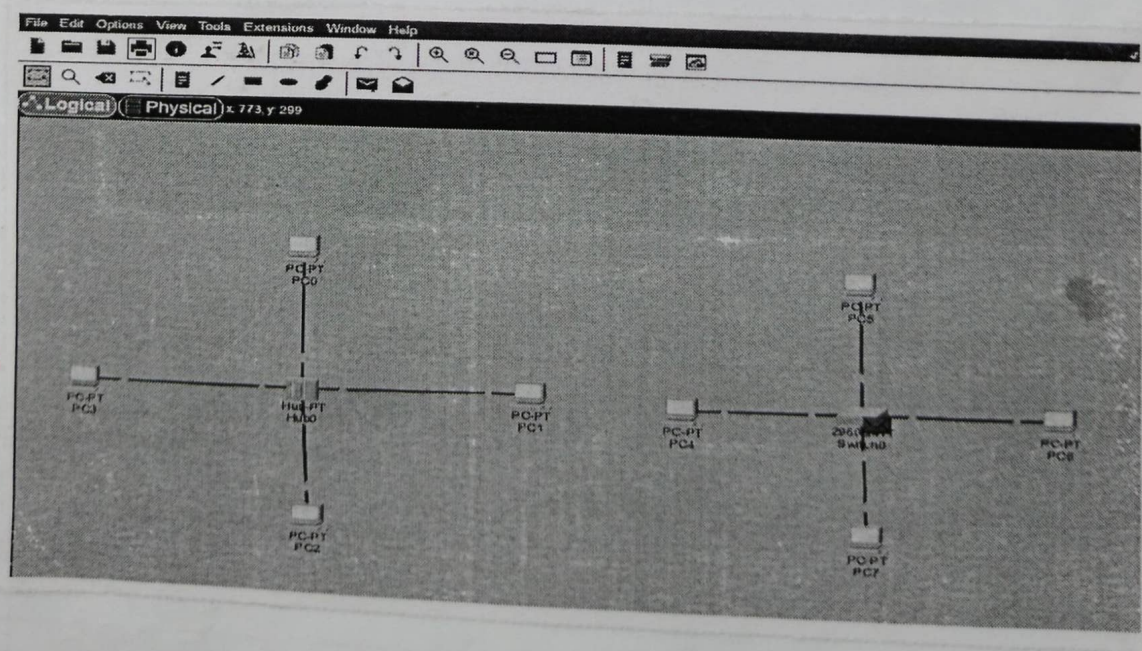

3) Click on the PC's connected to hub, go to the Desktop tab, click on IP configuration and enter an IP address and subnet mask. Here, the default gateway and DNS server information is not needed as there are only two end devices in the network.

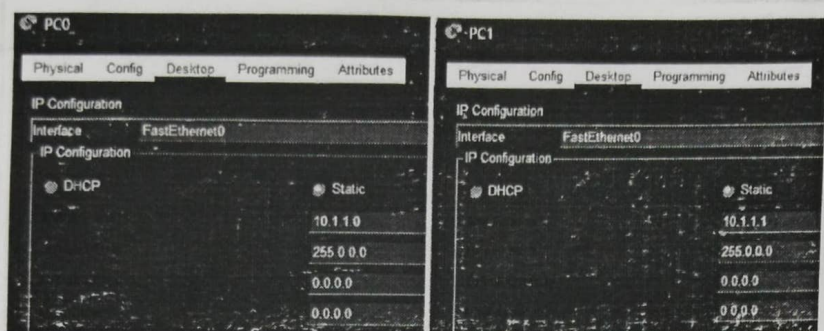


Click on the PDU (message icon) from the common tool bar,

a) Drag and drop it on the PC (source machine) and then drop it on another PC (destination machine) connected to the Hub.

4) Observe the flow of PDU from source PC to destination PC by selecting the Realtime mode of simulation.

5) Repeat step #3 to step #5 for the PCs connected to the switch.

6) Observe how Hub and Switch are forwarding the PDU and write your observation and conclusion about the behaviours of Switch and Hub.

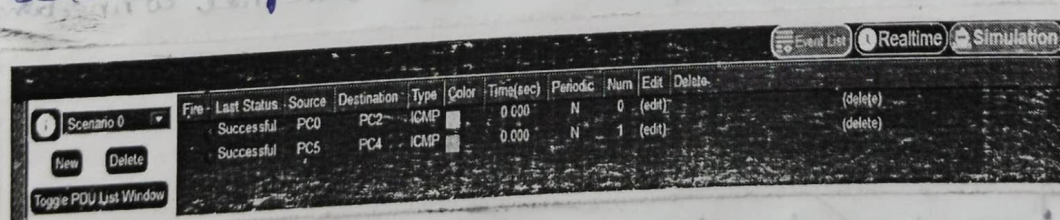

RESULT:

Thus, we have analysed the behaviour of network devices using CISCO PACKET TRACER simulator.