PARTS LIST			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	16	Screw 8-32 Steel 2.500	
2	56	Nut 8-32 THIN Nylock	Nylock nuts have internal nylon lock.
3	4	Nylon Spacer .5 OD-.125	
4	16	HS Shaft Adapter Circle	
5	14	275-1027-001	Nylock nuts have internal nylon lock.
6	4	Alu C 1x2x1x35	
7	8		STEP AP203
8	3	Shaft Collar Metal	
9	8	V5_Smart_Motor_276-4840	STEP AP214
10	8	276-1209-001	
11	8	LS 36T Gear	
12	8	48T High Strength Gear v2 (8-Pack) (276-7573)	STEP AP214
13	8	Part50-02	
14	4	Standoff .5	
15	2	Teflon Washer-.04	
16	4	3.25 Omni Antistatic	
17	4	3.25 (260mm Travel) Anti-Static Wheel (276-7771)	STEP AP203
18	1	Back Channel	
19	2	Alu C 1x2x1x35	
20	8	Nylon Spacer .5 OD-.125	
21	6	Screw 8-32 Steel 2.500	
22	32	Screw 8-32 Steel 2.500	
23	8	Screw 8-32 Steel 2.500	
24	2	Screw 8-32 Steel 2.500	
25	2	Screw 8-32 Steel 2.500	
26	2	Screw 8-32 Steel 2.500	
27	6	Screw 8-32 Steel 2.500	
28	2	Screw 8-32 Steel 2.500	
29	1	Standoff .5	
30	1	Standoff .5	
31	1	Standoff .5	
32	2	Alu C 1x2x1x35	
33	2	High Strength 12 Tooth Pinion Gear v1	
34	1	Worlds Cross Brace Stout	
35	2	Worlds cross brace spacer	
36	2	Worlds cross brace spacer 2	
37	1	Back Brace	
38	1	Alu C 1x2x1x35	

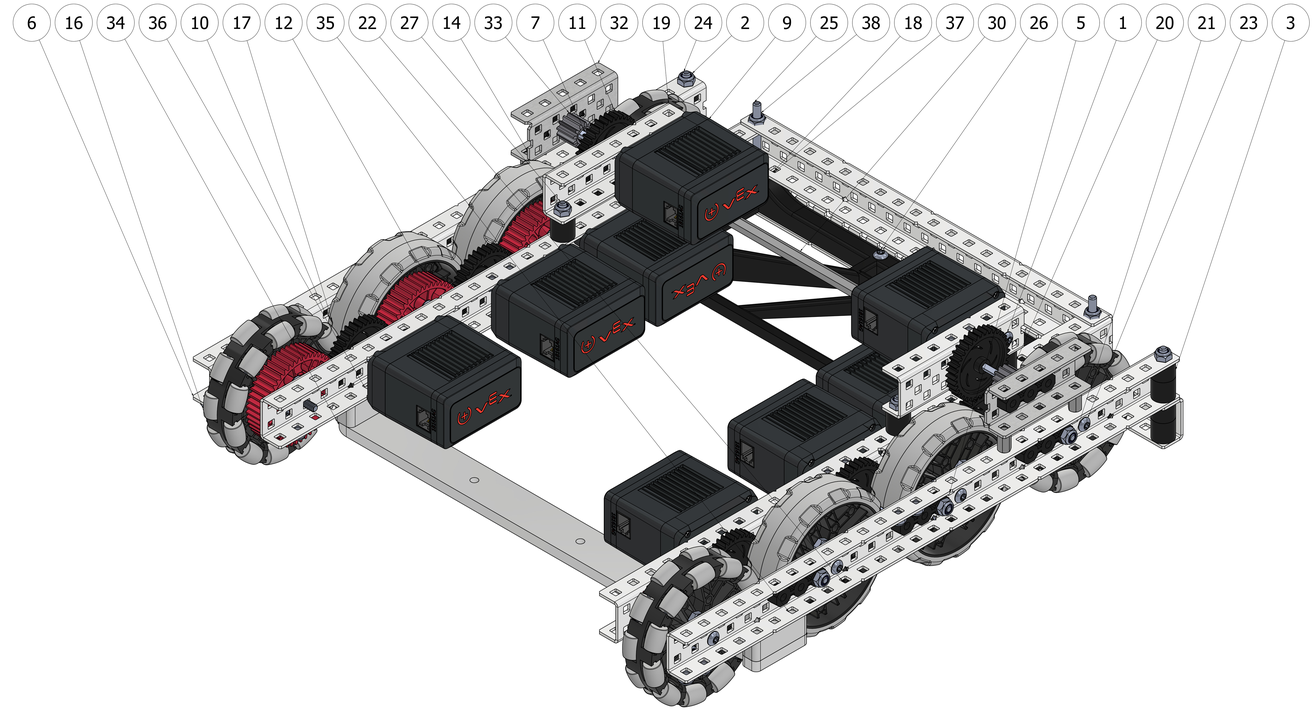

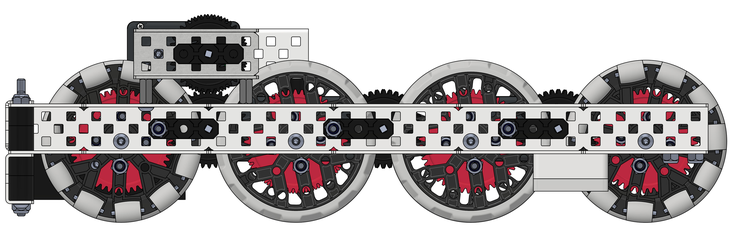

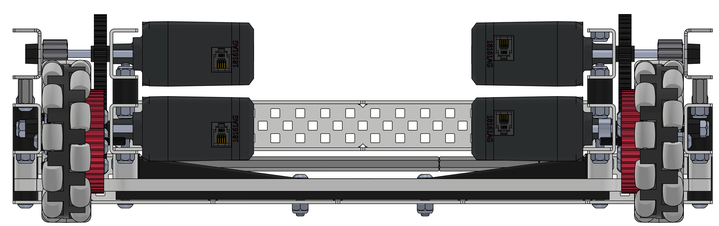

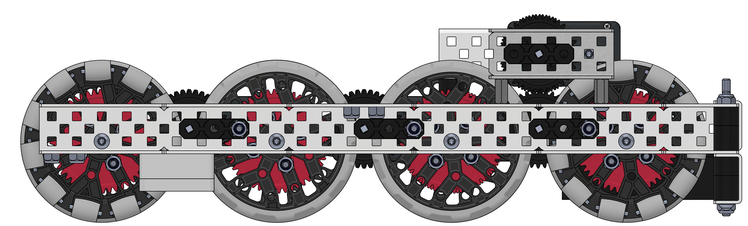

This drawing is the sole property of Arkansas Tech University. It is provided on the condition that it will not be used in any way that is harmful to the university's interests.
By accepting or using this drawing, you agree to this condition and acknowledge Arkansas Tech University's exclusive ownership.

TOLERANCES: UNLESS OTHERWISE SPECIFIED	
NO DECIMAL	X. ± 1
1 PLACE DECIMAL	X. X ± .03
2 PLACE DECIMAL	X.XX ± .01
3 PLACE DECIMAL	X.XXX ± .005
ANGLES	X° ± 15'

Prototype Chassis

DRAWN: DATE:
CHECKED: SCALE:

SHEET: