
TAG 100 （6 in）

Audience logo panel, -X side（flat on the slanted panel）

Label up: the arrow points to the top edge.

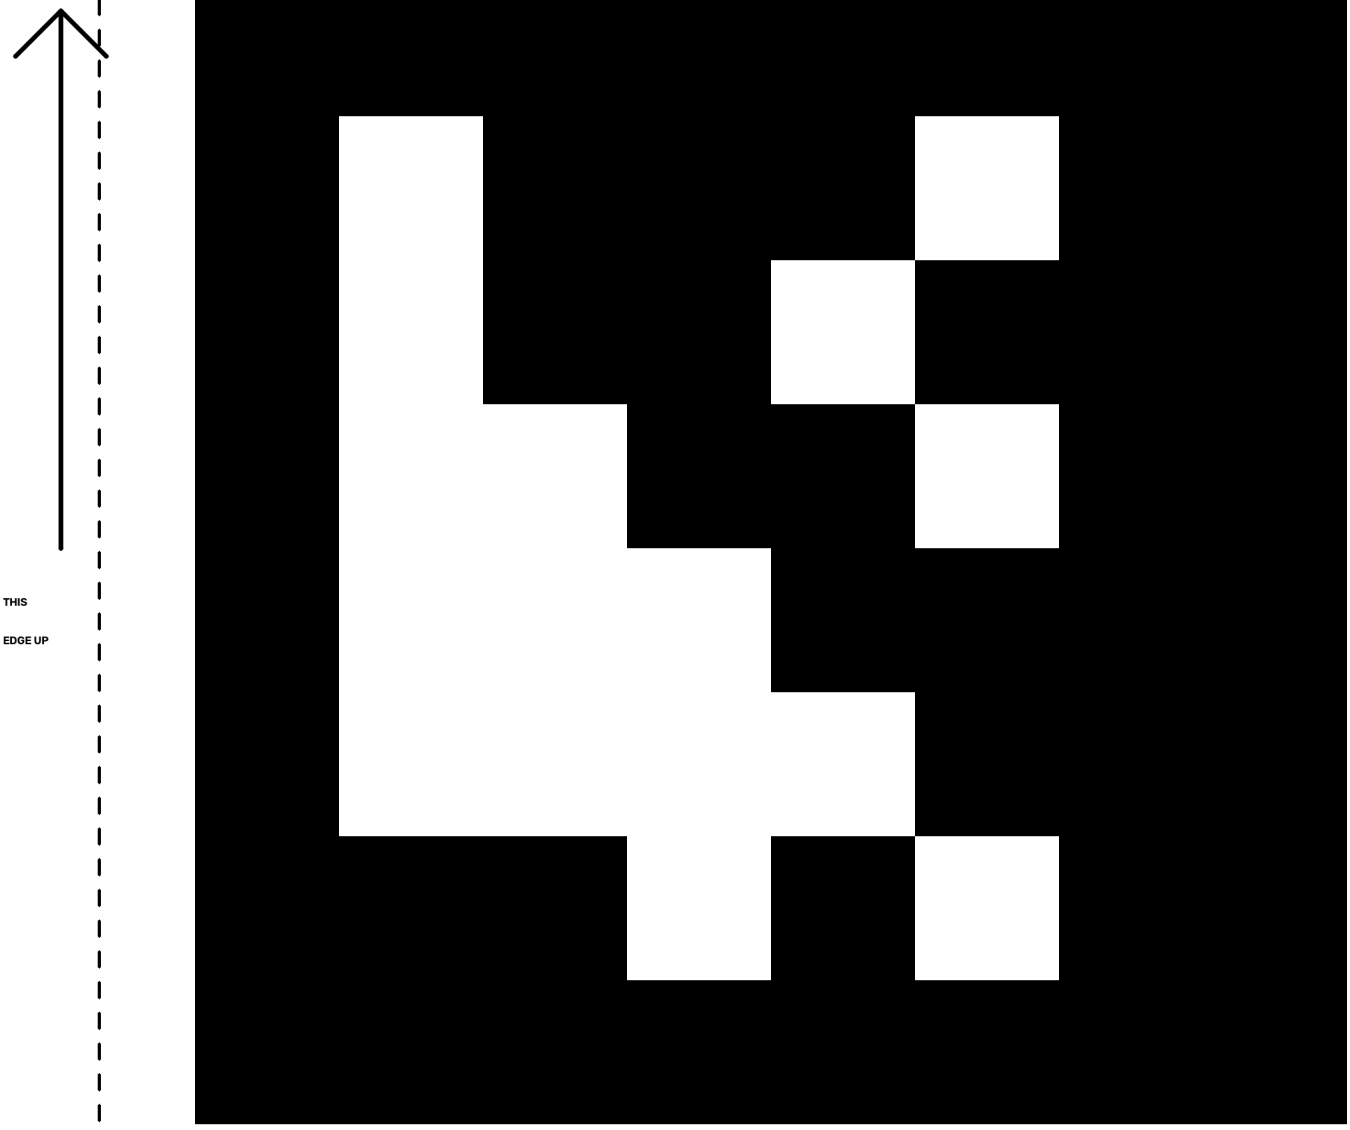

Lay it flat on the SLANTED audience logo panel, top edge flush with the top of the

panel, outer edge 0.2 in inside the panel's top corner（center 10.0 in from the middle）.


Cut exactly on the dashed line（0.5 in white border）. Measure the placement with a tape to 0.25 in.

This line must measure 6.00 in. Print at 100% / Actual size, not fit to page.

TAG 101 （6 in）

Audience logo panel, +X side（flat on the slanted panel）

Label up: the arrow points to the top edge.

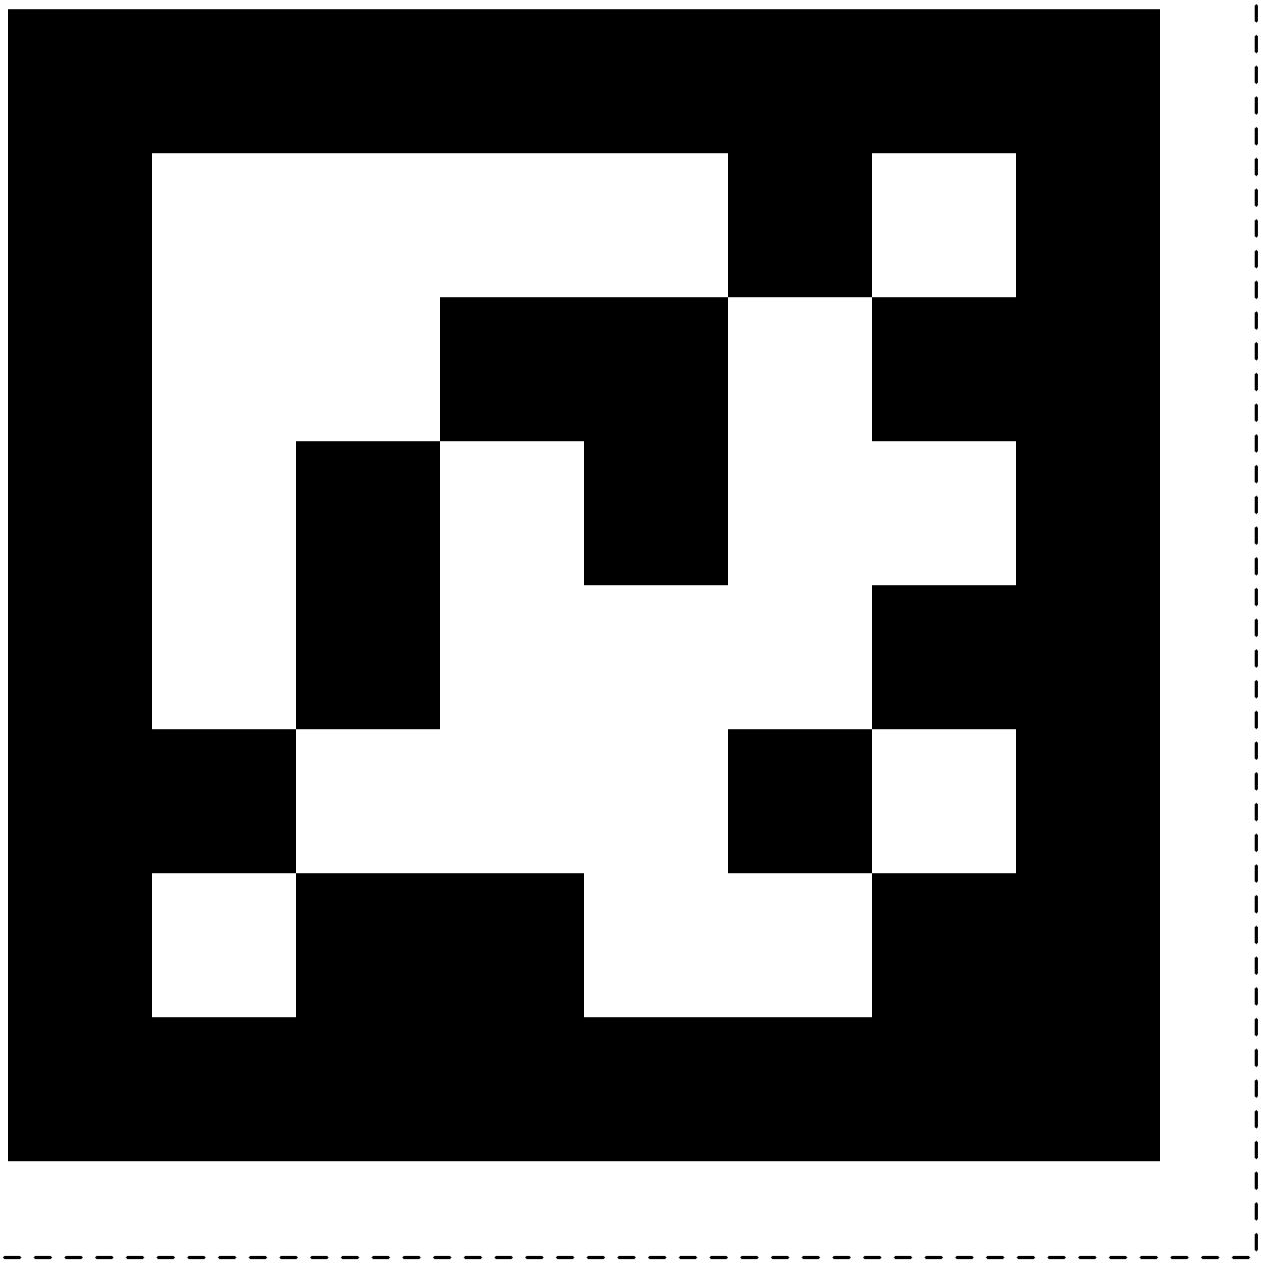

THIS

EDGE UP

Lay it flat on the SLANTED audience logo panel, top edge flush with the top of the

panel, outer edge 0.2 in inside the panel's top corner（center 10.0 in from the middle）.


Cut exactly on the dashed line（0.5 in white border）. Measure the placement with a tape to 0.25 in.

This line must measure 6.00 in. Print at 100% / Actual size, not fit to page.

TAG 102 （6 in）


Frame base corner (-X, +Y), standing tilted back 20 deg

Label up: the arrow points to the top edge.



THIS


EDGE UP

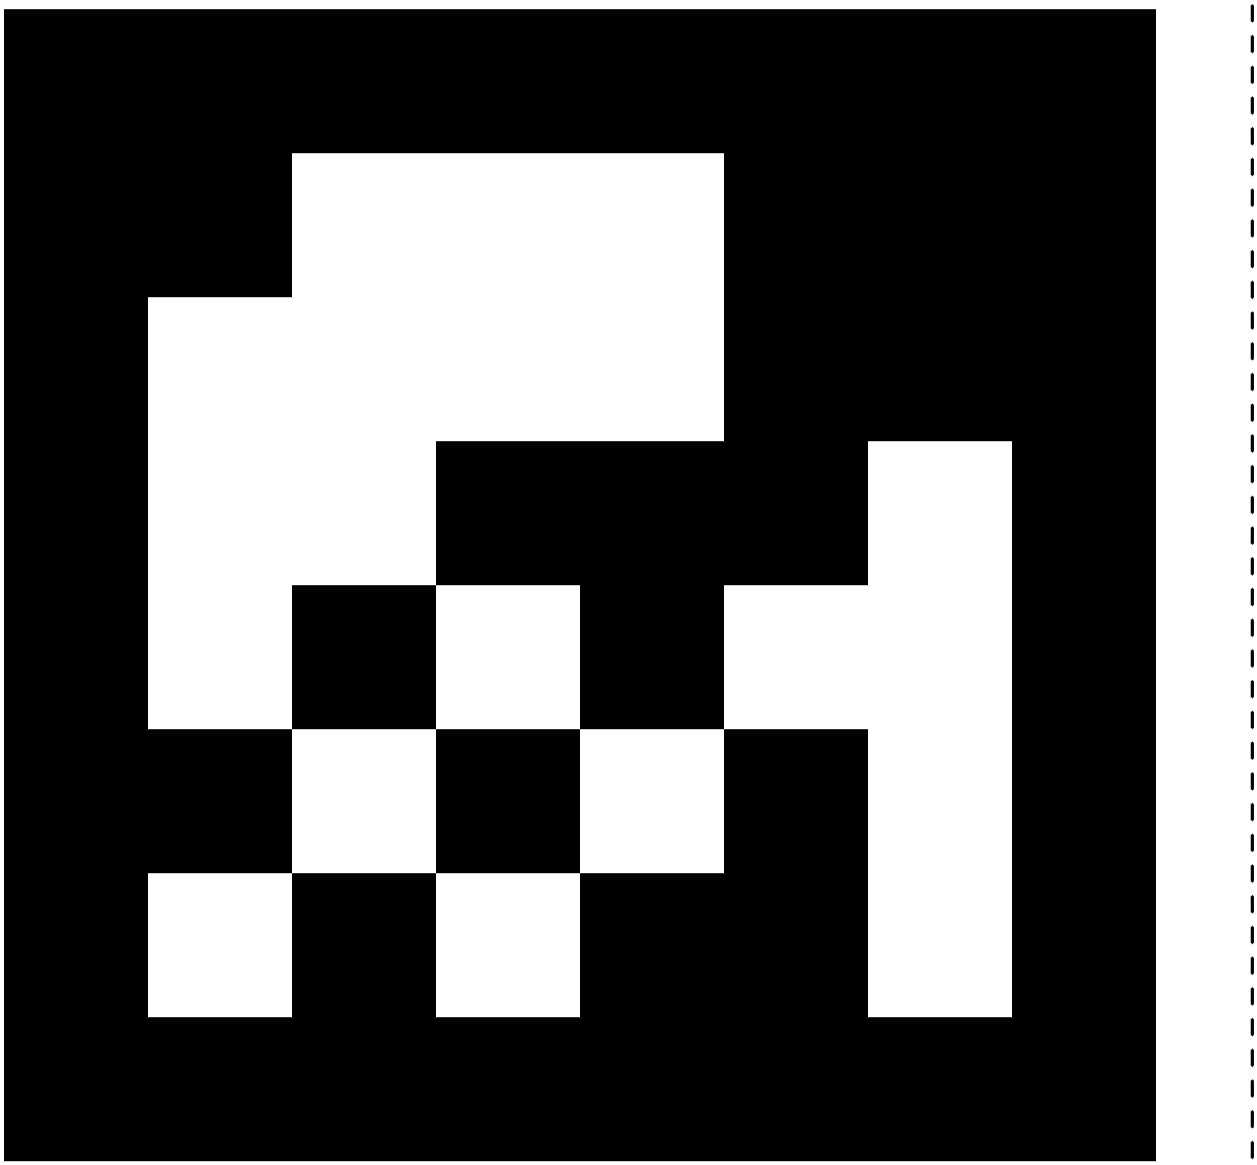

Cut ON the dashed line (0.5 in border). Stand the card on the tile at the base corner,

black square flush with the foot bar's outer face, leaning back 20 deg on its foam wedge.

Cut exactly on the dashed line (0.5 in white border). Measure the placement with a tape to 0.25 in.




This line must measure 6.00 in. Print at 100% / Actual size, not fit to page.

TAG 103 （6 in）


Frame base corner（+X, +Y）, standing tilted back 20 deg

Label up: the arrow points to the top edge.

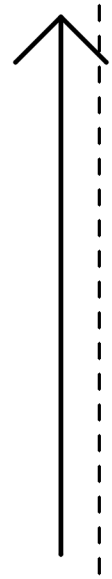

THIS


EDGE UP

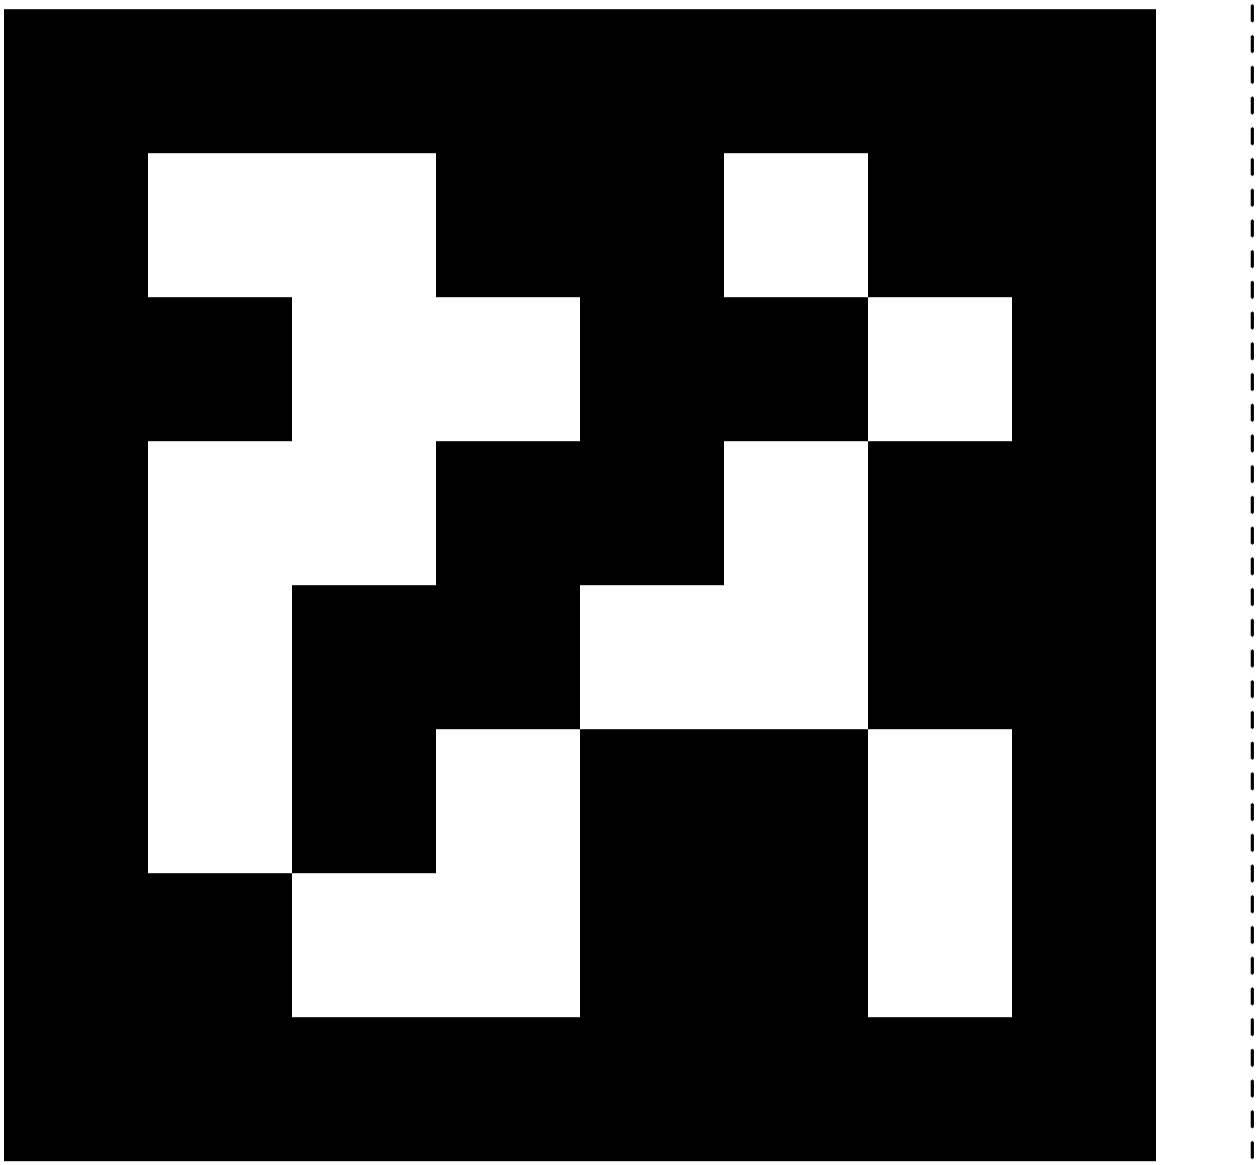

Cut ON the dashed line（0.5 in border）. Stand the card on the tile at the base corner,

black square flush with the foot bar's outer face, leaning back 20 deg on its foam wedge.

Cut exactly on the dashed line（0.5 in white border）. Measure the placement with a tape to 0.25 in.



This line must measure 6.00 in. Print at 100% / Actual size, not fit to page.