

1_Power

2A time-delay JFC1032-1200TS


BUCK 12V – 4V5

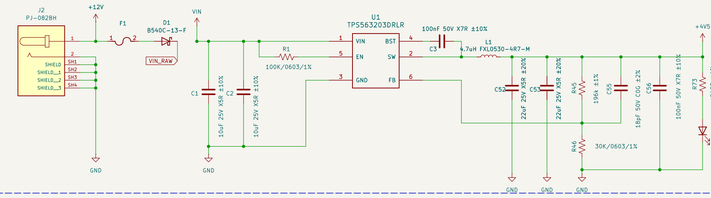


BUCK 12V – 6V

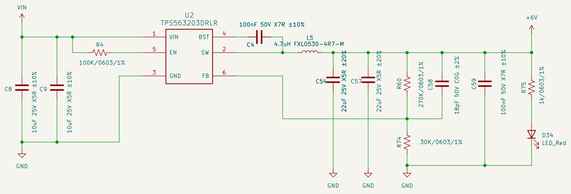


BUCK 12V – 3V3

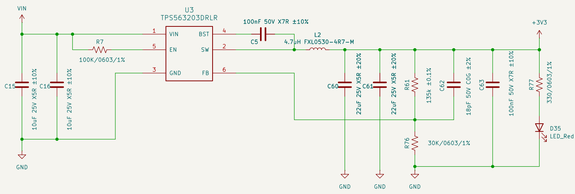



INPUT PROTECTION — REGULATED 12 V ONLY
13.8 V clamp; ~2 A current limit; ~10 ms soft start
Validate startup, hot plug and simultaneous loads.

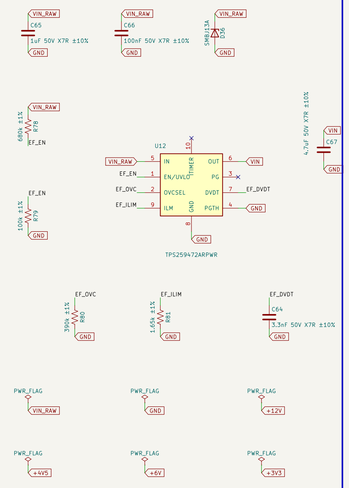


3_PERIPHERAL

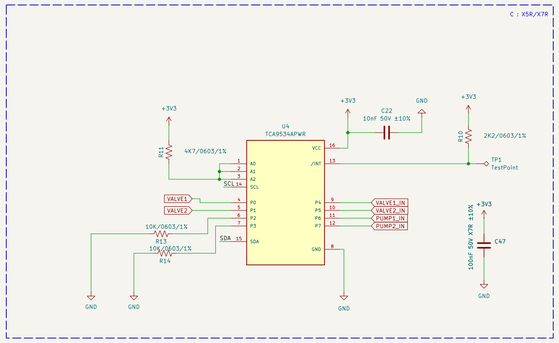


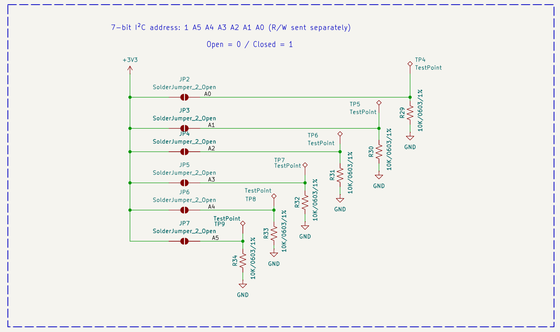

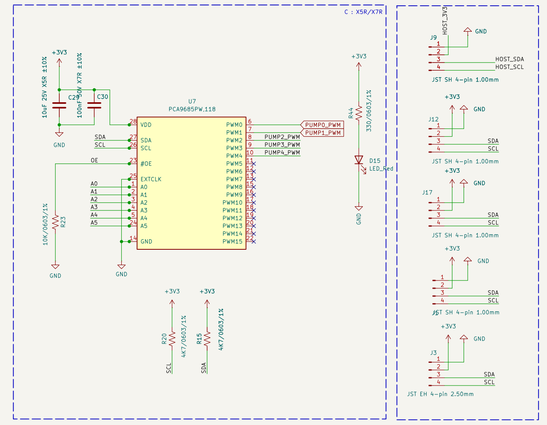


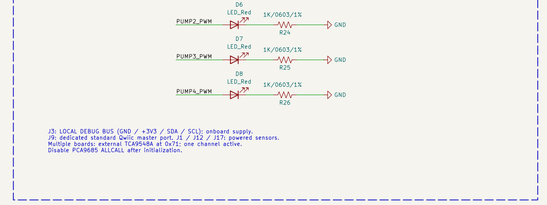


QWIIC MASTER: J9 TO USB / BATTERY ESP32

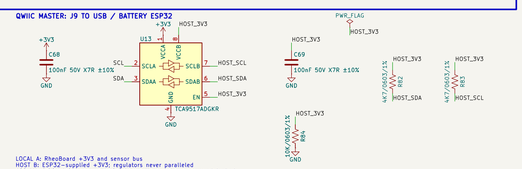

2_Pump / Valve Drivers

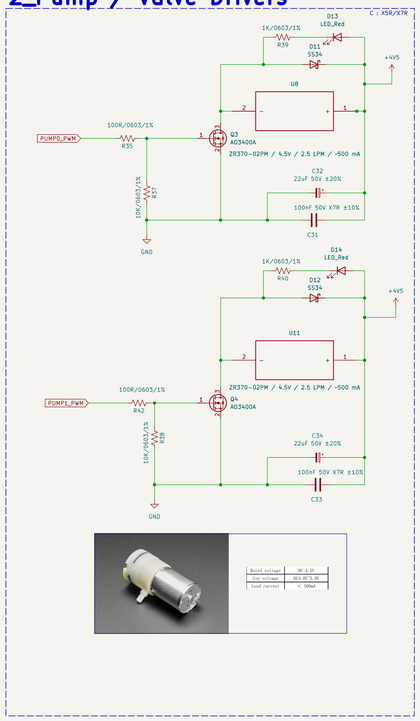


Rated voltage	DC 6.0V
Use voltage	DC 5.0V~7.0V
Load current	< 500mA

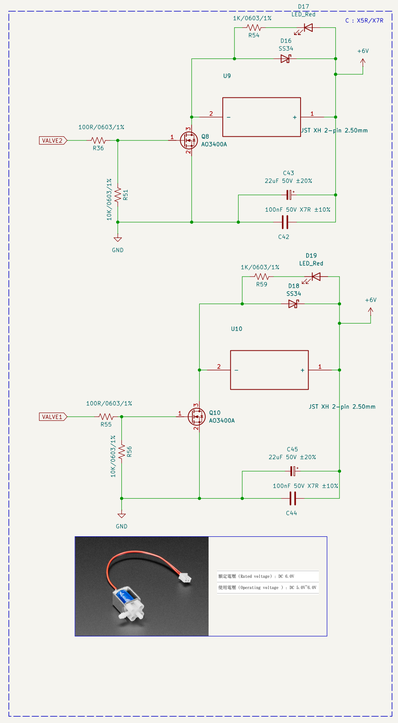

额定电压 (Rated voltage)	DC 6.0V
使用电压 (Operating voltage)	DC 5.0V~6.0V

4_Switch Inputs

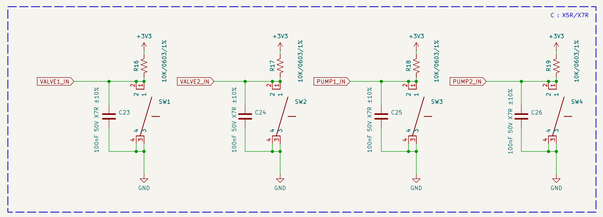

5_Pressure Sensor

