

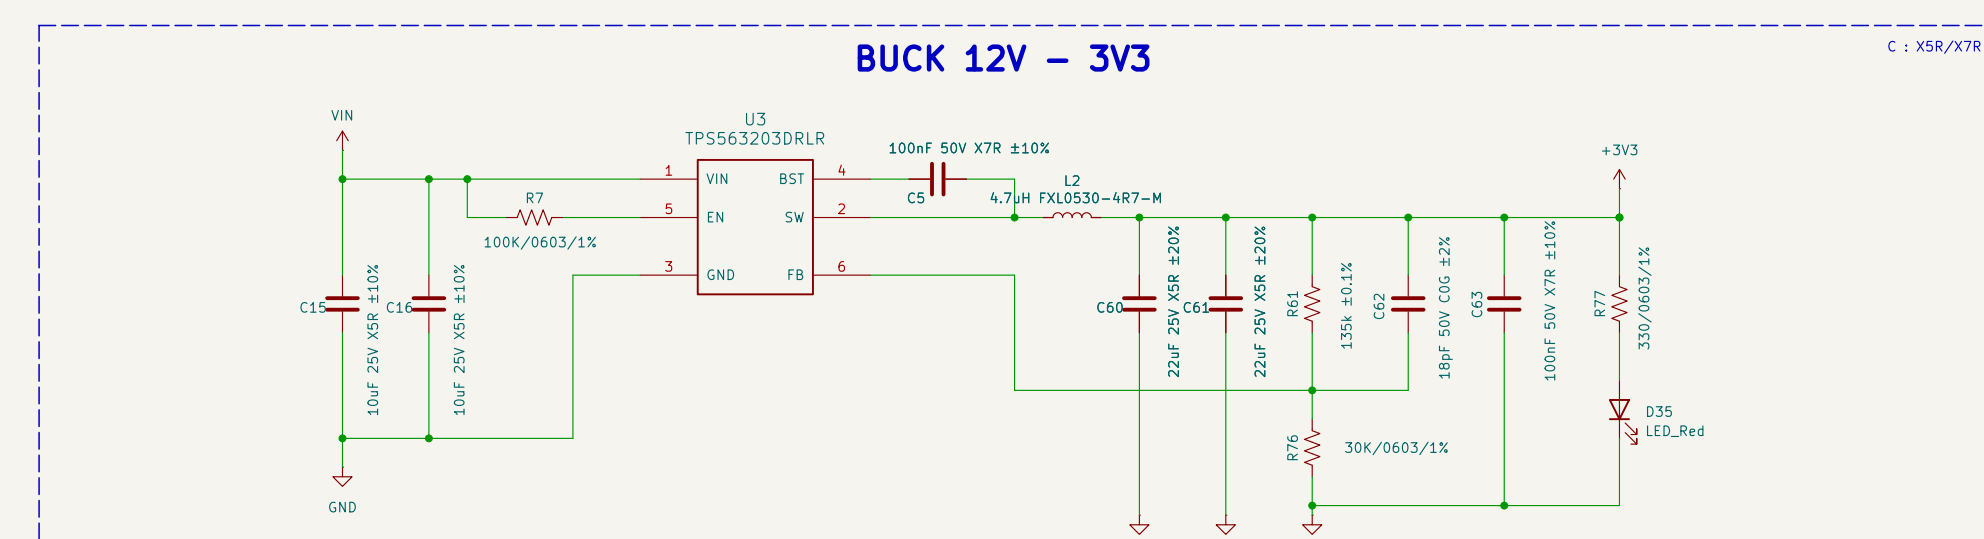
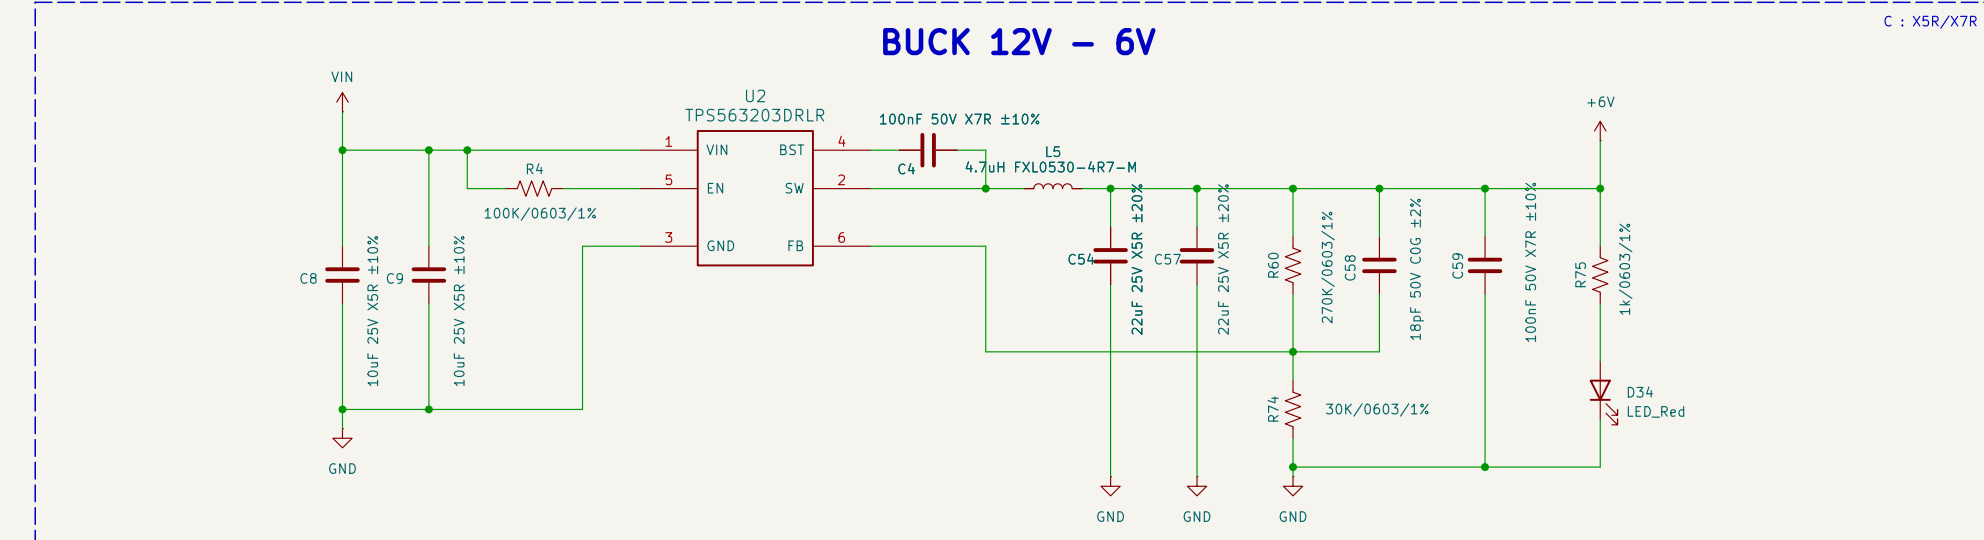






1_Power

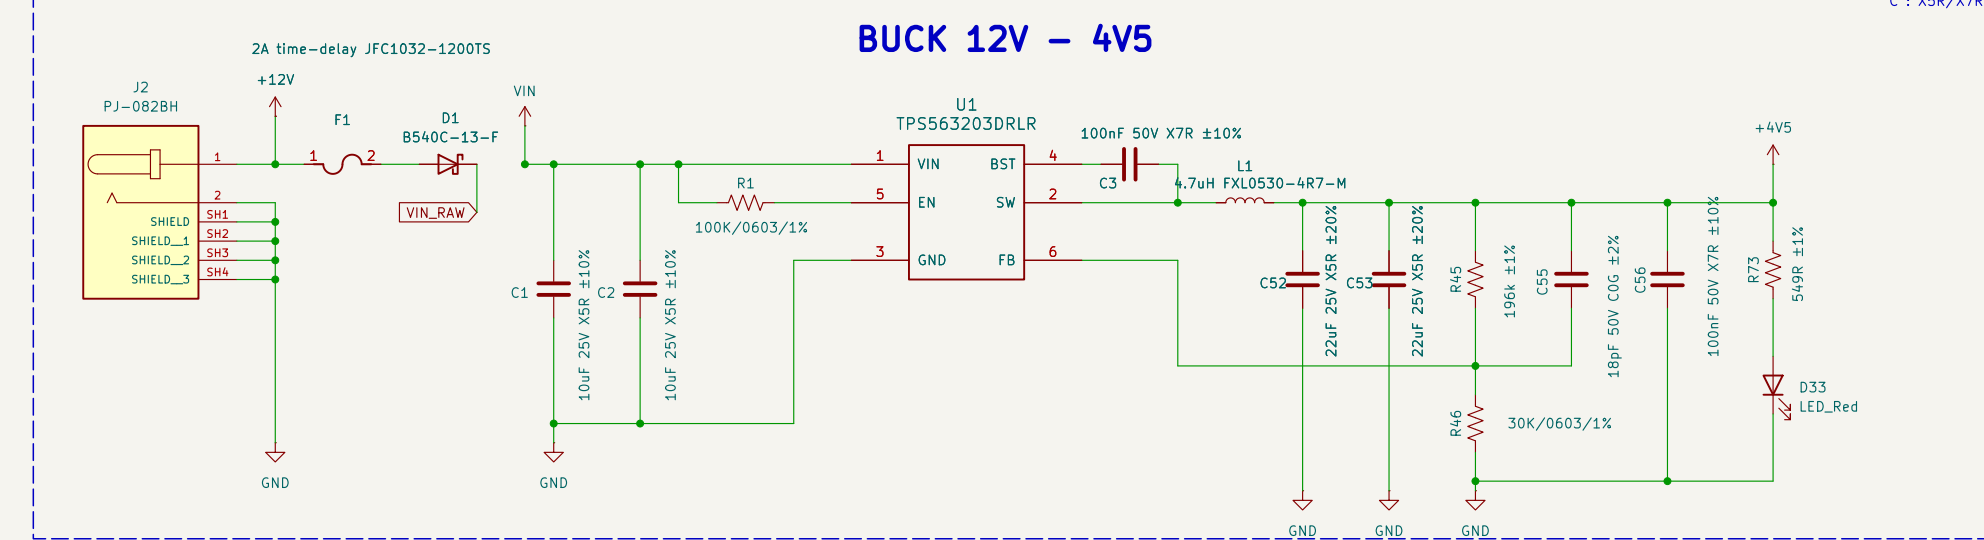


INPUT PROTECTION – REGULATED 12 V ONLY
11.8 V clamp, 2 A current limit, <18 ms soft start
Validate startup, hot plug and simultaneous loads.

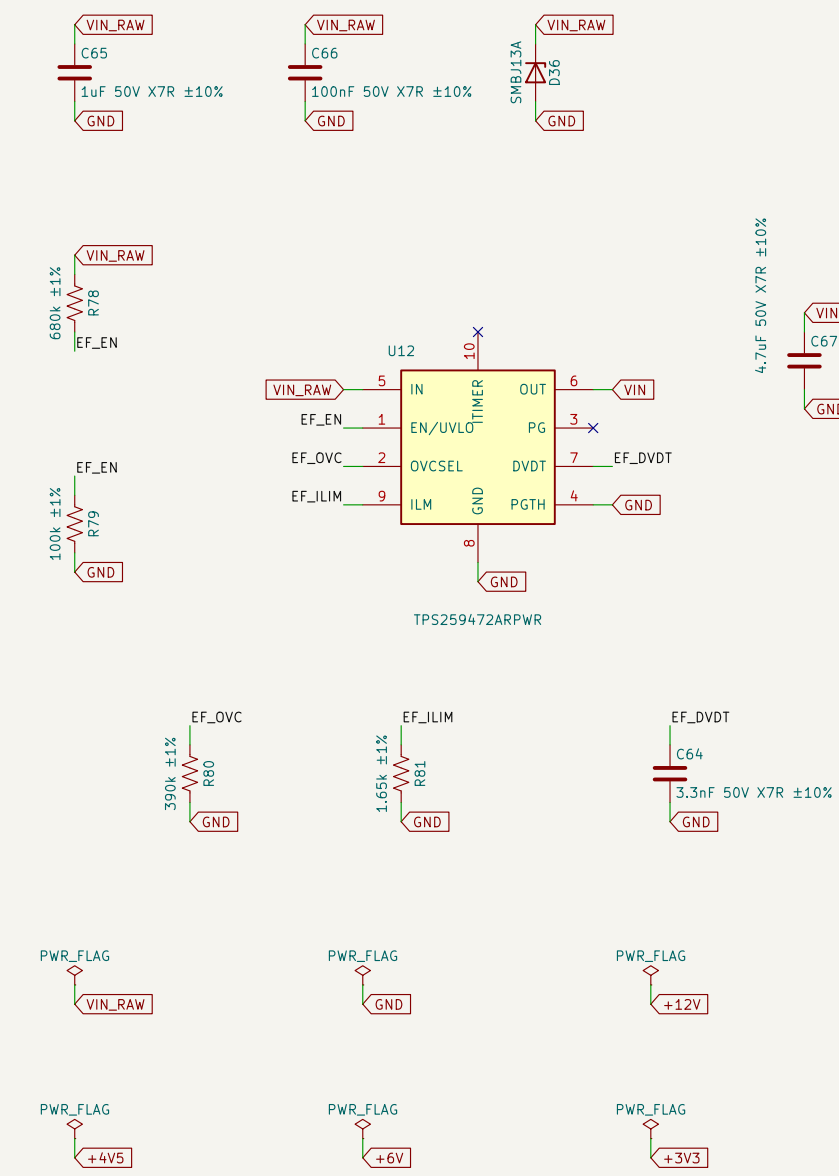


3_PERIPHERAL

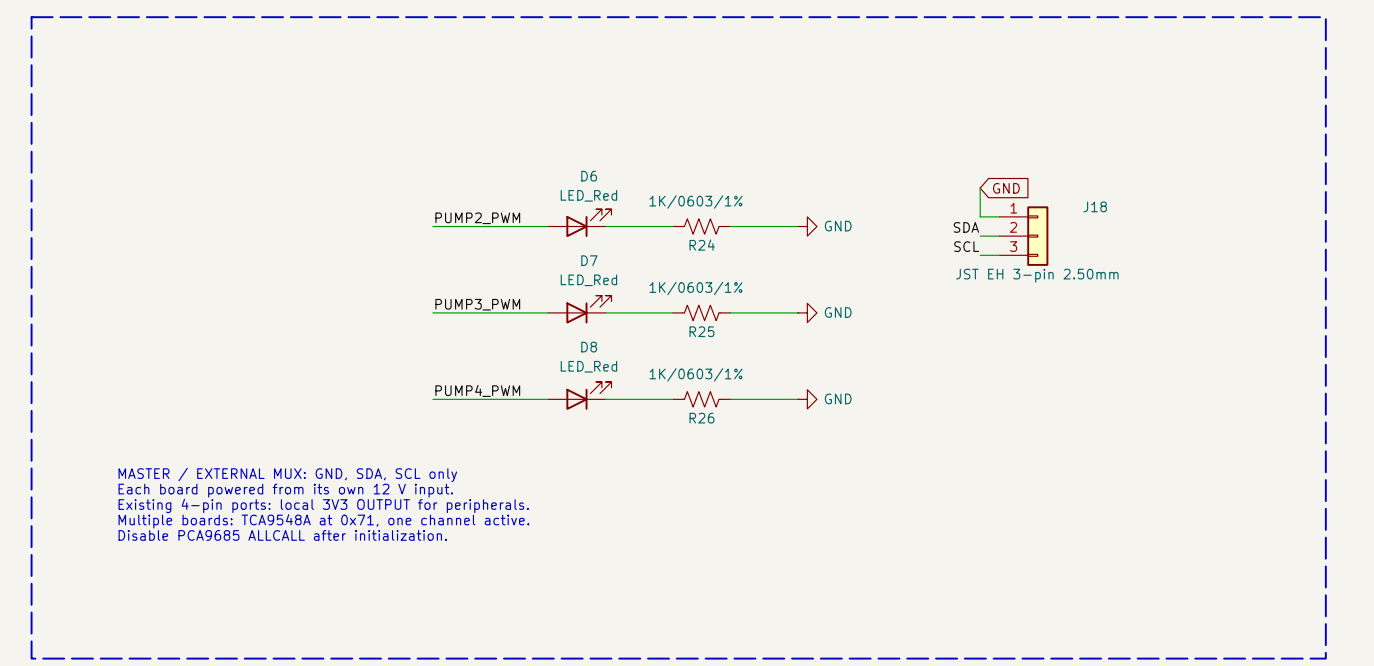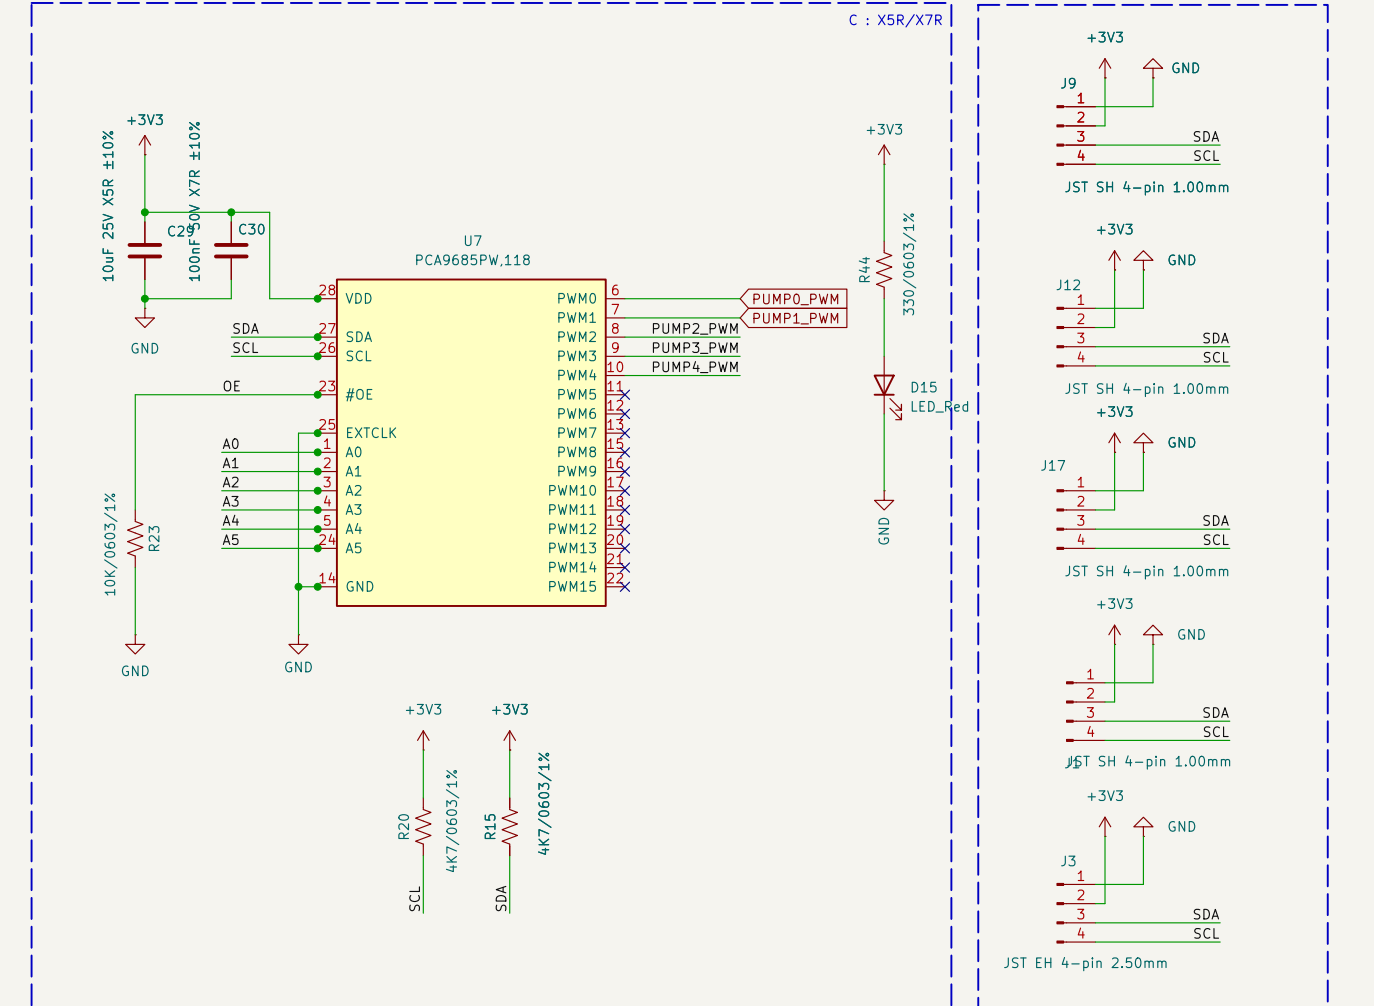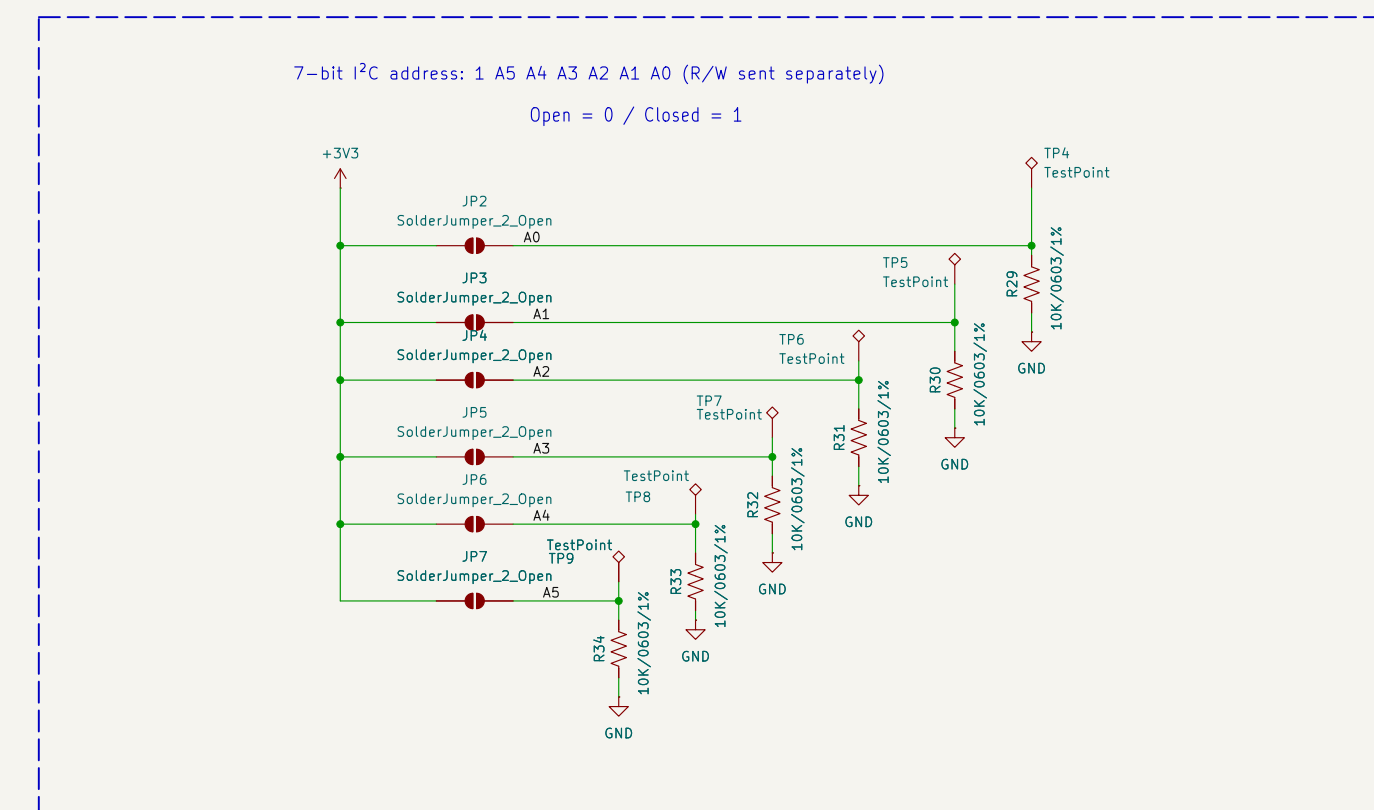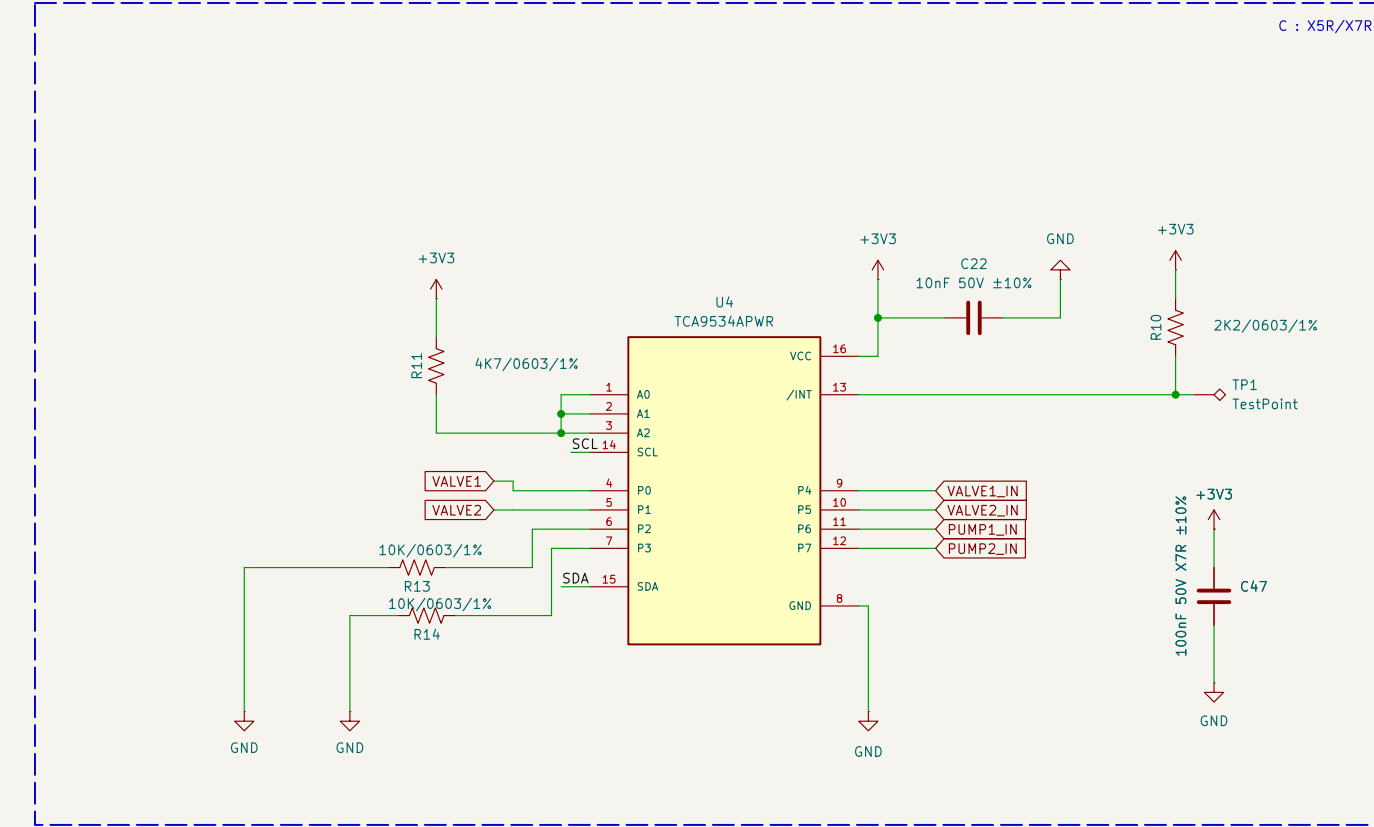


2_Pump / Valve Drivers

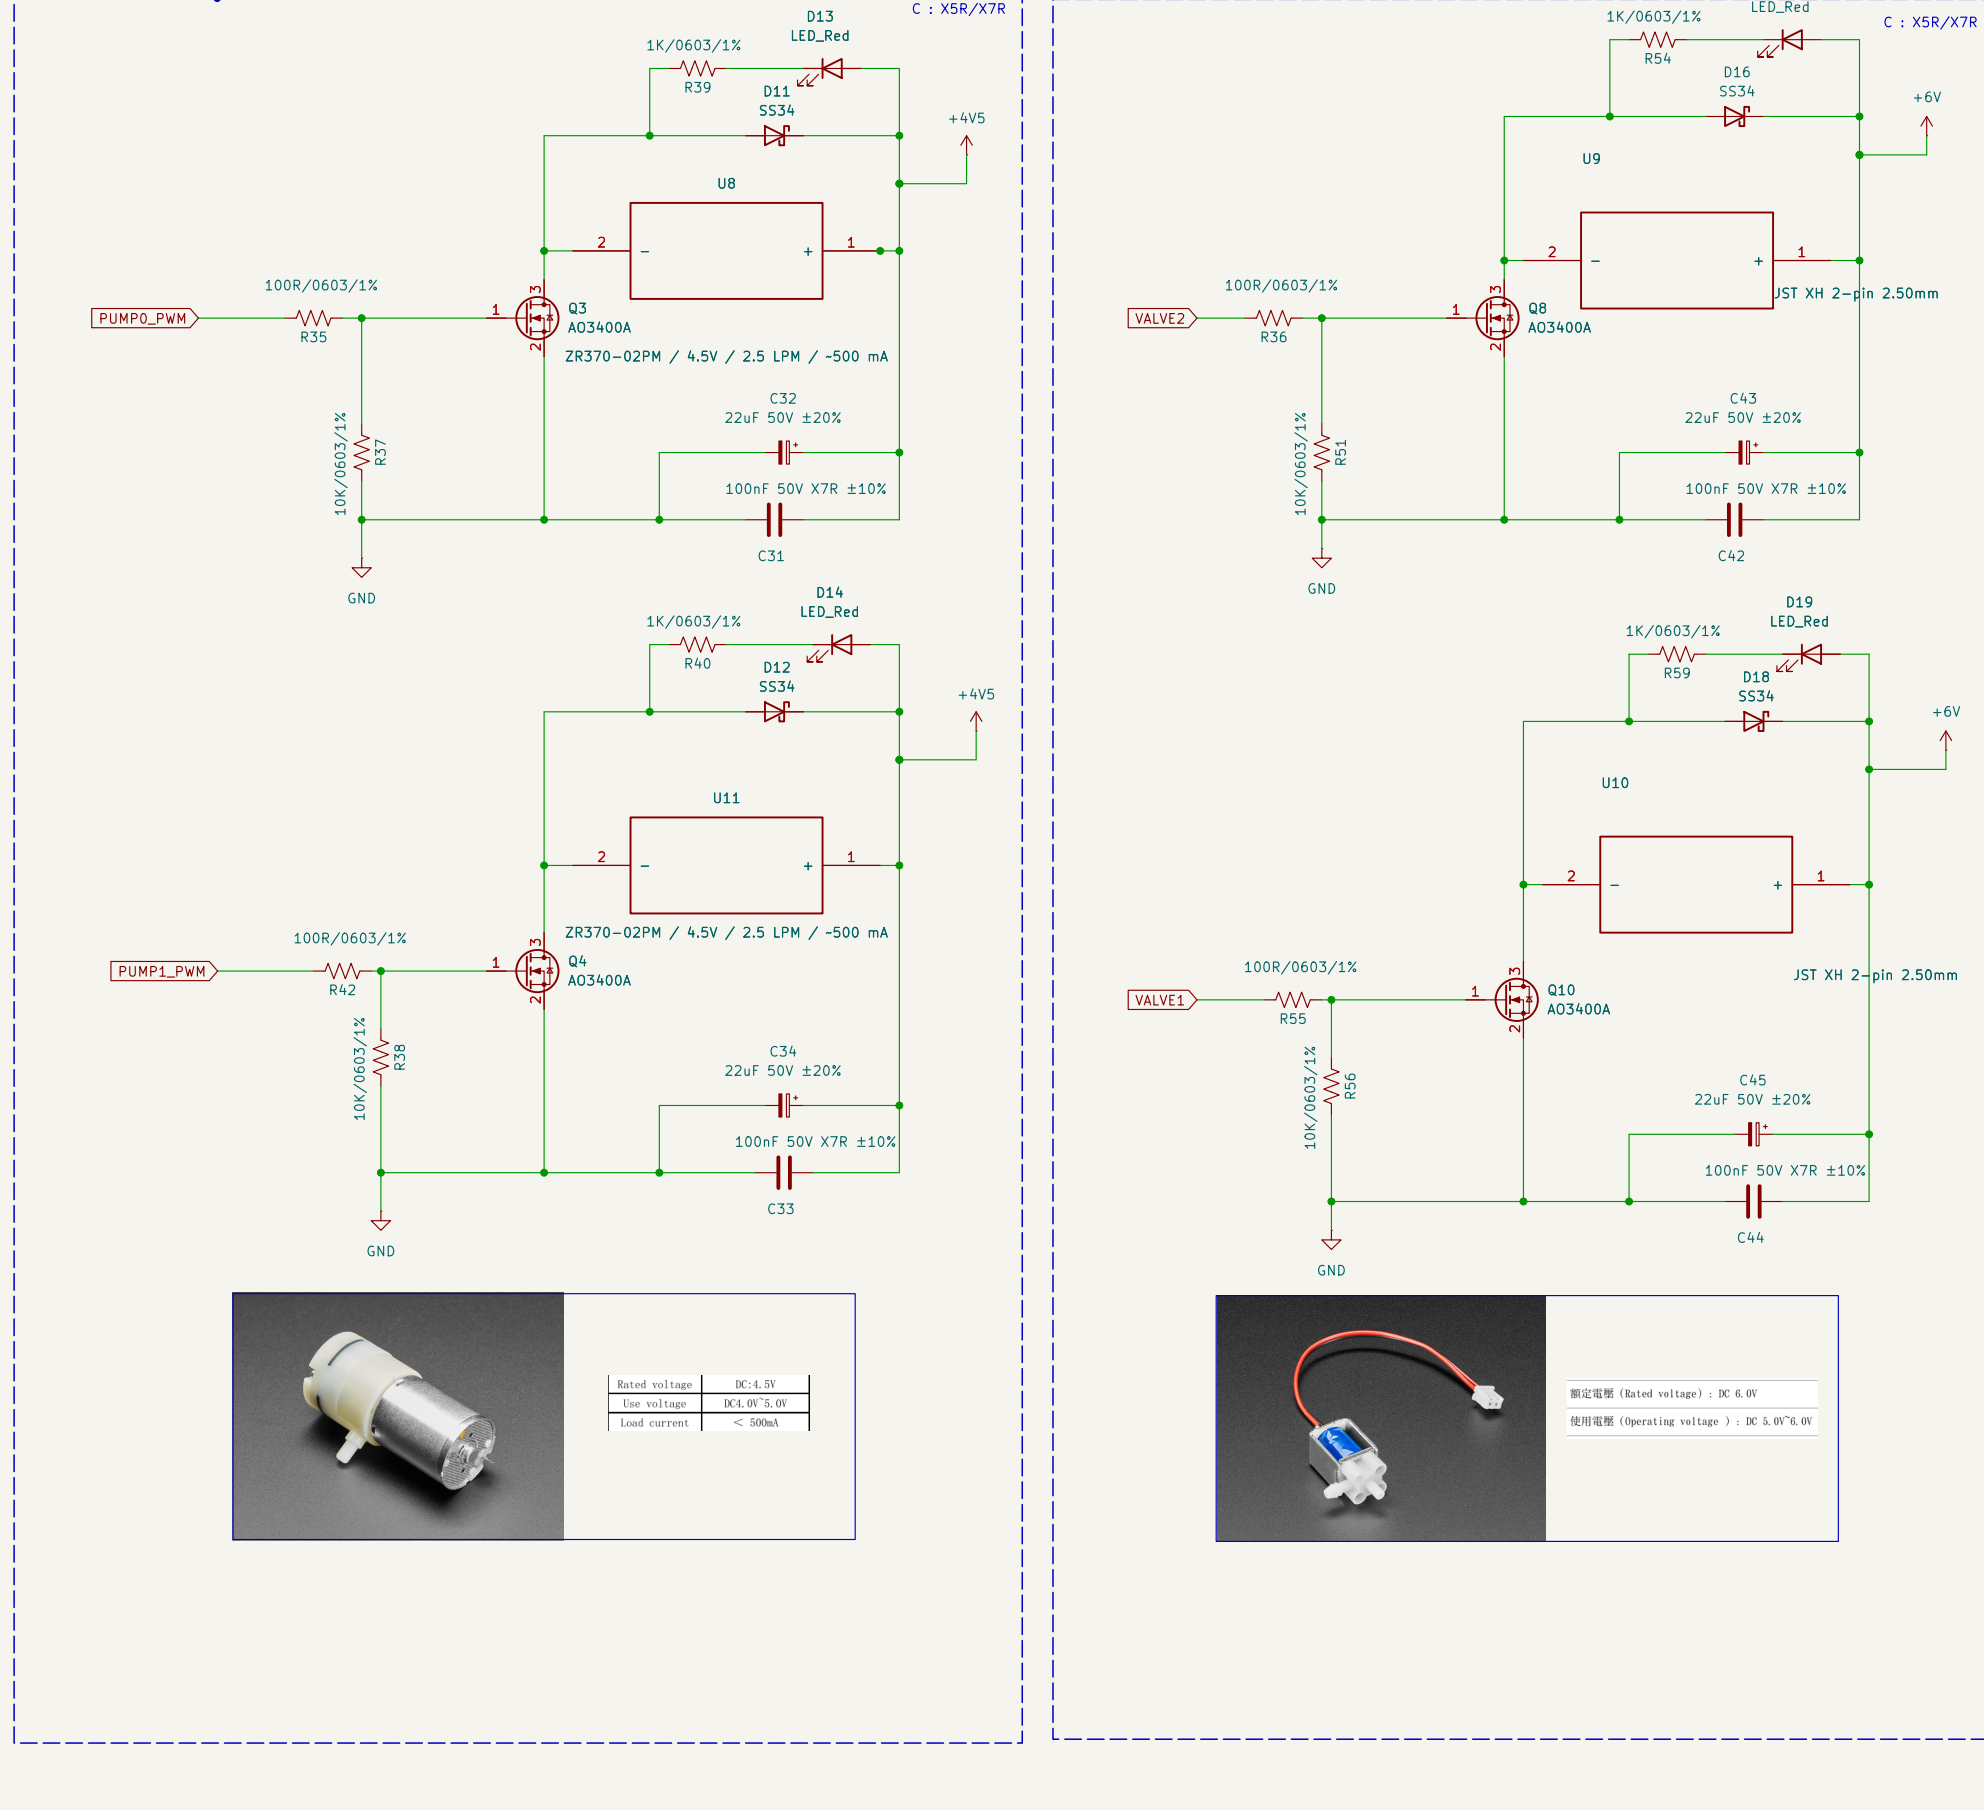

4_Switch Inputs

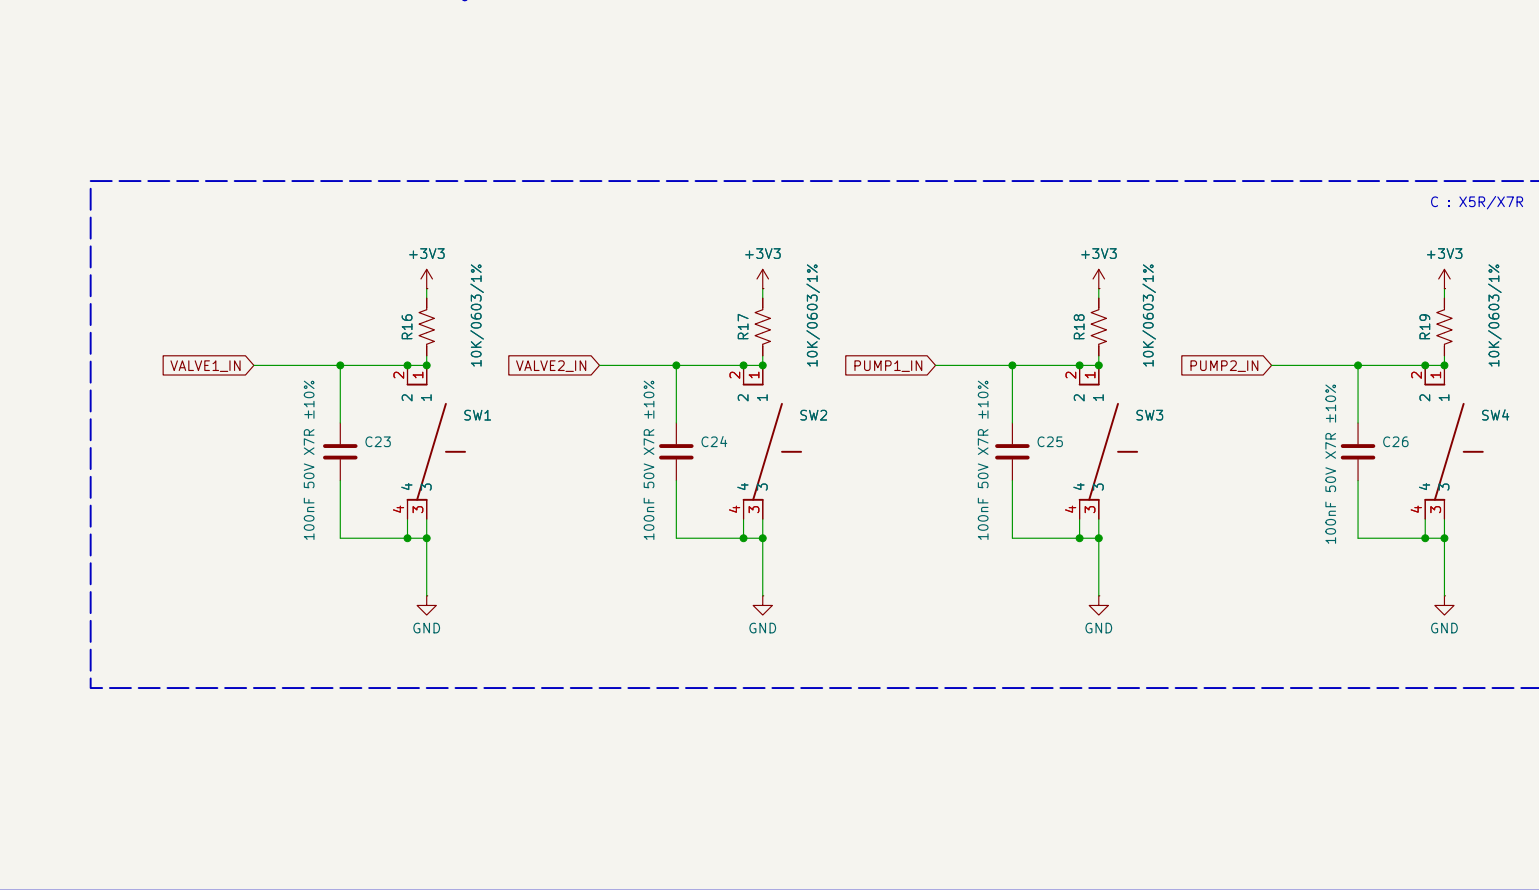

5_Pressure Sensor

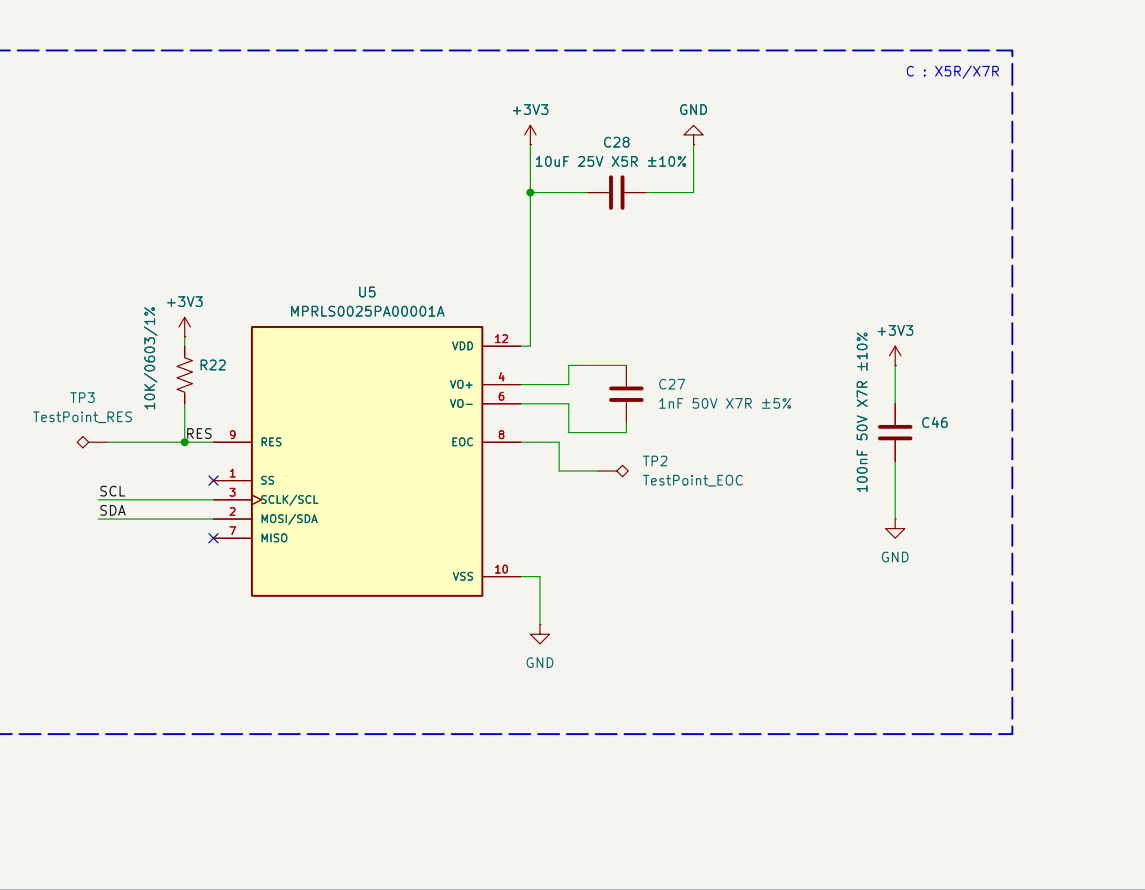

H1 MountingHole H2 MountingHole H3 MountingHole H4 MountingHole