

# A physically consistent representation of recurring Jökulhlaup floods in a fully-coupled subglacial hydrology model

Adam J. HEPBURN,<sup>1,\*</sup> Sammie BUZZARD,<sup>2</sup> Stephen LIVINGSTONE,<sup>3</sup> Andrew SOLE,<sup>3</sup> Liz BAGSHAW,<sup>4</sup> Guilhem BARRUOL,<sup>5</sup> Gianluca BIANCHI,<sup>6</sup> Adam BOOTH,<sup>7</sup> Caroline CLASON,<sup>8</sup> Lisa CRAW,<sup>6</sup> Thomas CHUDLEY,<sup>8</sup> Christine DOW,<sup>9</sup> Samuel DOYLE,<sup>1,3</sup> Laura EDWARDS,<sup>10</sup> Florent GIMBERT,<sup>5</sup> Adrien GILBERT,<sup>5</sup> Jonathon HAWKINGS,<sup>6</sup> Ryan ING,<sup>12</sup> Andrew JONES,<sup>11</sup> Siobhan KILLINGBECK,<sup>13</sup> Tifen LE BRIS,<sup>5</sup> Matthew PEACEY,<sup>1,4</sup> Michael PRIOR-JONES,<sup>6</sup> Neil ROSS,<sup>14</sup> Rob STORRAR,<sup>11</sup> Sian THORPE,<sup>3</sup> Remy VENESS,<sup>11</sup> Alexandre MICHEL,<sup>5</sup> Angus MOFFATT,<sup>3</sup> Sarah MANN,<sup>6</sup> Tun Jan YOUNG,<sup>15</sup>

**1.** Centre for Glaciology, Department of Geography and Earth Sciences, Aberystwyth University, Aberystwyth, UK **2.** Department of Geography and Environmental Sciences, Northumbria University, Newcastle upon Tyne, UK **3.** Department of Geography, The University of Sheffield, Sheffield, UK **4.** School of Geographical Sciences, University of Bristol, Bristol, UK **5.** Institut des Géosciences de l'Environnement (IGE), Université Grenoble Alpes, CNRS, IRD, Grenoble INP, Saint Martin d'Hères, France **6.** School of Earth and Environmental Sciences, Cardiff University, Cardiff, UK **7.** School of Earth and Environment, University of Leeds, Leeds, UK **8.** Department of Geography, Durham University, Durham, UK **9.** Department of Geography and Environmental Management, University of Waterloo, Waterloo, ON, Canada **10.** School of Biological and Environmental Sciences, Liverpool John Moores University, Liverpool, UK **11.** Department of Natural and Built Environment, Sheffield Hallam University, Sheffield, UK **12.** School of GeoSciences, University of Edinburgh, Edinburgh, UK **13.** Department of Geography, Swansea University, Swansea, UK **14.** School of Natural and Environmental Sciences, Newcastle University, Newcastle upon Tyne, UK **15.** School of Geography and Sustainable Development, University of St Andrews, St Andrews, UK

\*Correspondence: Adam J. Hepburn <adam.hepburn@aber.ac.uk>

**ABSTRACT.** The design for the *Journal of Glaciology* has been implemented as a  $\text{\LaTeX 2\epsilon}$  class file and is derived from `article.cls`. We recommend that authors use this guide as a template. While writing we suggest you use the two-column `[twocolumn]` option to check that mathematical equations fit the measure. Submitted papers must, however, be presented using the one-column `[review]` option. If you have any problems using the class file, please contact Overleaf support at [www.overleaf.com/contact](http://www.overleaf.com/contact). The abstract should be less than 200 words and one paragraph long.

## 1 INTRODUCTION

1. Importance of ice-marginal lake drainage and potential hazard implications
2. Efforts to model
3. shortcomings and opportunities to improve


## 2 METHODS

In this paper we build upon earlier 1D work (Kingslake and Ng, 2013) by incorporating a physically-consistent representation of ice-marginal lake drainage into the 2D Glacier Drainage System (GlaDS) model (Werder and others, 2013), part of the Ice-sheet and Sea-level System Model (ISSM;

Larour and others, 2012, , `commit a9a3804`). Our work includes several couplings i) between the subglacial hydrological system and the ice-marginal lake ii) the subglacial hydrological system and ice dynamics, and iii) the ice-marginal lake and ice dynamics (Fig. 1). In Section 2.1 we describe the coupled ISSM-GlaDS model and relevant additional modifications to the version originally presented by (Werder and others, 2013). We describe the equations governing ice-marginal lake drainage in Section 2.2, and our method of numerical solution is given in Section 2.3.

### 2.1 Ice Flow and subglacial drainage models

We used the GlaDS model (Werder and others, 2013) as integrated into ISSM (Larour and others, 2012). GlaDS itself is a widely used (REF) 2D continuum model of subglacial hy-

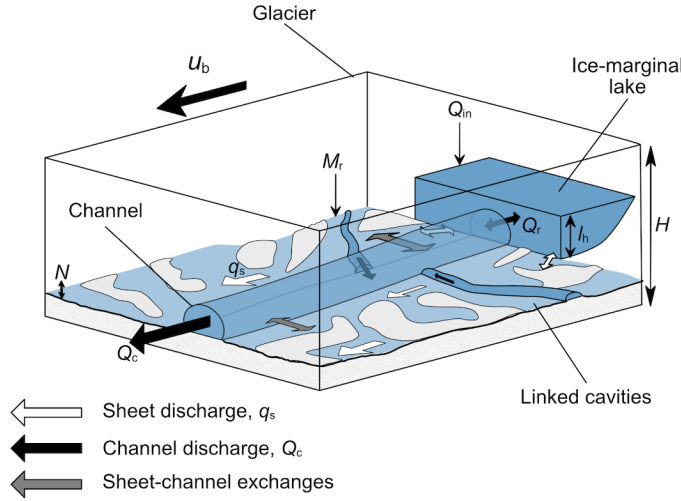

**Fig. 1.** Schematic illustration of our model, showing a glacier (with thickness,  $H$ ) and ice-marginal lake (with height,  $l_h$ , and input,  $Q_{in}$ ). The lake is connected two-ways to a subglacial channel (with discharge,  $Q_c$ ) and a ‘sheet’ of linked cavities (with discharge  $q_s$ ) fed by a basal melt term ( $M_r$ ). Changes in  $l_h$  modifies  $Q_s$  and  $q_s$  which in turn changes basal velocity,  $U_b$  through effective pressure,  $N$ . Note, although the ice-marginal lake is shown as connected to one channel, in our model an ice-marginal lake can be connected to the subglacial system at multiple outlets. [SINGLE-COLUMN]

drology. We refer interested readers to Appendix A.1 for an overview of key GlaDS equations, and to Werder and others (2013) for a full description of the equations governing water flow. In summary, GlaDS operates on an anisotropic mesh generated using ISSM and includes a description of i) distributed flow through a series of linked cavities represented as a continuous sheet with variable thickness, and ii) channelised flow through R thlisberger channels that are represented along element edges. Sheet elements exchange water with channels, and the cross-sectional area of these channels evolves through time due to the dissipation of potential energy, sensible heat exchange, and cavity closure rates due to viscous ice creep. Discharge in both the distributed ( $q_s$ ,  $\text{m}^2\text{s}^{-1}$ ) and channelised system ( $Q_c$ ,  $\text{m}^3\text{s}^{-1}$ ) is driven by gradients in the hydraulic potential,  $\nabla\phi$  ( $\text{Pa m}^{-1}$ ), with steeper hydraulic gradients driving enhanced water discharge. In GlaDS,  $Q_c$  is always non-zero along every internal edge, though only a few reach a discernible discharge. For ease of visualisation we follow previous work [REF] in declaring edges where  $Q_c \geq 0.5 \text{ m}^3\text{s}^{-1}$  to be ‘meaningful channels’ (e.g., Figure 2c–e). ISSM is a finite element higher-order ice-flow model which operates on anisotropic meshes and can be fully-coupled to additional modelling components (Larour and others, 2012).

In addition to the ice-marginal lake modifications which we describe below (Section 2.2), we note two key differences between the original GlaDS (Werder and others, 2013) and the ISSM version used here: i) rather than assuming water flow within the sheet to always be turbulent (cf: Werder and others, 2013), we make use of the Hill and others (2024) transition parametrisation, whereby sheet flow switches between laminar and turbulent flow according to the local Reynolds number, and ii) following Stevens and others (2022), we implemented a viscously deforming ‘elastic sheet layer’ which crudely represents hydraulic jacking where water pressure exceeds ice overburden pressure (see Section A.1).

To capture the influence of ice-marginal lake drainage on ice dynamics, we include a two-way coupling between ice flow and subglacial hydrology. The GlaDS derived effective pressure ( $N = p_i - p_w$ , where  $p_i$  is ice pressure and  $p_w$  is water pressure, *Pa*) modifies basal velocity  $U_b$  ( $\text{m a}^{-1}$ ) by governing frictional resistance at the ice-bed interface. In turn, the magnitude of  $U_b$  modifies the rate at which cavities open and thereby controls the thickness of the sheet (Eq. A7–A8\*). Two-way coupling between ISSM and GlaDS is a relatively new development, and the influence of friction parameters remains the subject of ongoing research (e.g., Khan and others, 2024, ADD MORE REF), though model response is known to be strongly influenced by the choice of friction law (Choi and others, 2023). We view this work as necessarily explorative [Flesh this out more], and we do not undertake a full analysis of the modelling interactions between subglacial hydrology and ice dynamics, which is beyond the scope of this work. Rather, we seek to capture the broad influence ice-marginal lake drainage cycles have upon ice dynamics. Accordingly, we present results using two widely applied friction laws: i) the ‘Budd-style’ friction law [REF] implemented in ISSM in terms of basal stress with the form:

$$\tau_b = C_b^2 N^r U_b^s, \quad (1)$$

where  $\tau_b$  is the basal stress magnitude (UNITS),  $C_b$  is the friction coefficient,  $N$  is effective pressure,  $U_b$  is basal velocity magnitude, and both  $r$  and  $s$  are friction coefficients, or ii) a Schoof-style friction law [REF] with the form:

$$\tau_b = \frac{C_s^2 v_b^m}{\left(1 + \left(\frac{C_s^2}{C_{\max} N}\right)^{1/m} U_b\right)^m}, \quad (2)$$

where  $C_s$  is the Schoof friction coefficient,  $m$  is a friction law exponent, and  $C_{\max}$  is Iken’s bound.

## 2.2 Lake evolution

Following Kingslake and Ng (2013) lake depth,  $l_h$  (m, Fig. 1), evolves according to the continuity equation:

$$\frac{dl_h}{dt} = \frac{1}{A_L} [Q_{in} - Q_r(t-1)], \quad (3)$$

where  $A_L$  is the uniform lake area ( $m^2$ ),  $Q_{in}$  ( $m^3s^{-1}$ ) represents extraglacial lake input (e.g., rainfall, surface runoff) and  $Q_r$  ( $m^3s^{-1}$ ) represents inflow/outflow at the lake outlet(s) from the previous timestep. In moving from a 1D to 2D representation of subglacial hydrology we include the contribution from the sheet, so that  $Q_r$  in our model is given by:

$$Q_r(t) = \sum_{i=1}^n (q_{s,i}(t) + Q_{c,i}(t)), \quad (4)$$

or the sum of the width integrated sheet discharge,  $q_s$ , and channel discharge,  $Q_c$  along  $n$  vertices connected to an ice-marginal lake. In GlaDS, a specific hydraulic potential is prescribed at outlets (Dirichlet boundary conditions), which is typically equivalent to zero water pressure (i.e., atmospheric pressure, Werder and others, 2013). As a boundary condition at lake outlets, hydrostatic lake pressure fixes the lake outlet hydraulic potential,  $\phi_{outlet}$  to be:

$$\phi_{outlet}(t) = \rho_w g z_b + \rho_w g l_h(t), \quad (5)$$

at all times, where  $g$  is gravitational acceleration ( $m s^{-1}$ ) and  $z_b$  is bed elevation (m a.s.l.). The evolving  $\phi_{outlet}$  handles the coupling between subglacial hydrology and ice-marginal lake by modifying the local  $\nabla\phi$  and therefore changing sheet/channel discharge (see Eq. A4 & A11).

## 2.3 Method of numerical solution

We solve for  $l_h$  using a Picard fixed-point iteration scheme comprising an outer and inner loop. In the outer loop, we update  $l_h$  given  $Q_r$  from the previous timestep (Eqn. 3) using a backward Euler solver and use this to set  $\phi_{outlet}$  (Eqn. 5) at the current timestep. In the inner loop, GlaDS solves for the domain-wide  $\phi$  until it satisfies a set convergence criteria, as in previous implementations of GlaDS (see: Werder and others, 2013; Hill and others, 2024). Following the inner loop converging, and given the global  $\phi$ , the model updates  $h_s$ ,  $N$ ,  $Q_c$ , and  $q_s$ , before summing  $Q_c$  and  $q_s$  at lake outlet nodes to give  $Q_r$  (Eqn. 4). The outer loop iterates until the norm of the current and previous  $l_h$  satisfies a given tolerance.

**Table 1.** Variables and Units<sup>a</sup>

| Variable | Units       | Description                   |
|----------|-------------|-------------------------------|
| $\phi$   | Pa          | Hydraulic potential           |
| $Q_c$    | $m^3s^{-1}$ | Channel discharge             |
| $q_s$    | $m^2s^{-1}$ | Sheet discharge               |
| $h_s$    | m           | Sheet thickness <sup>b</sup>  |
| $l_h$    | m           | Lake Height                   |
| $Q_r$    | $m^3s^{-1}$ | Lake discharge                |
| $U_b$    | $ma^{-1}$   | Magnitude of basal velocity   |
| $u_b$    | $ma^{-1}$   | x-component of basal velocity |
| $v_b$    | $ma^{-1}$   | y-component of basal velocity |
| $S$      | $m^2$       | Channel cross-sectional area  |
| $t$      | hrs         | Time coordinate               |
| $X$      | km          | Horizontal coordinate         |
| $Y$      | km          | Vertical coordinate           |
| $N$      | Pa          | Effective pressure            |

<sup>a</sup>The first section lists dependent variables, the second section lists coordinates, and the third section lists derived variables [FIX ORDER.]

<sup>b</sup>Note this includes the elastic sheet and cavity sheet thickness, see Eq. A6–A7

## 3 MODEL APPLICATION TO A SYNTHETIC DOMAIN

We test our model on a simple  $10 \times 3$  km rectangular domain (Figure 2a), discretised on a 2D triangular mesh with a characteristic edge length of 100 m ( $n_{vertices}=2486$ ). The bed elevation,  $h_b$  is characterised by a gentle slope ( $\sin = 0.0075$ ) dipping towards the terminus, and ice thickness is parabolic ( $H \propto \sqrt{x}$ ) increasing from  $H=50$  m at  $X=0$  km to  $H \sim 155$  m at  $X=10$  km. A  $5$  km<sup>2</sup> ice-marginal lake was connected to a single vertex at the upper boundary of the domain where  $(X, Y) = (10, 1.5)$  km. To facilitate comparison with previous work, our domain is similar in scale and geometry to that in Kingslake and Ng (2013), which was chosen to be loosely analogous to the Merzbacher Lake and South Inylchek Glacier, Kyrgyzstan (Ng and Liu, 2009).

Model variables are given in Table 1 and our synthetic model parameters are given in Table 2. The parameter dependency of GlaDS has already been extensively explored elsewhere [REF]. To efficiently explore the parameter dependence of our ice-marginal lake drainage model we limited our testing to those previously highlighted as critical to subglacial drainage (e.g., channel/sheet conductivity terms,  $k_c/k_s$ , the basal bump height,  $h_b$ , the channel sheet width,  $l_c$ , and the cavity spacing,  $l_r$ ) as well as the terms which control the input of water into both the subglacial system (basal melt rate), and the ice-marginal lake (lake refill rate,  $Q_{in}$ ). As is common-practice, we varied one parameter at

a time between a minimum and maximum bound (Table 2) informed both by previous work [REF] and the limits of numerical stability. As reference, an additional simulation was taken as the approximate midpoint of each of these parameters (Fig. 2). Each simulation was run for a total of 15 years and had a 30 minute timestep. We used a Budd-style friction law (Eq. 1) with the coefficient  $C_b = 100$  and exponents  $r = 1/4$  and  $s = 1/4$ . The ice dynamic model was initialised with  $U_b = 100, \text{ m, a}^{-1}$ , with Dirichlet boundary conditions ( $U_b = 0, \text{ m, a}^{-1}$ ) at the terminus and stress-free Neumann boundary conditions elsewhere. The hydrology model was initialised with  $\phi$  equivalent to 90% of ice overburden pressure, and an initial sheet thickness,  $h_s$  equal to half the bump height,  $h_b$ . We prescribe  $\phi$  terminus  $X = 0 \text{ km}$  to be  $\approx 1 \times 10^4$  as our GlaDS Dirichlet boundary condition, though arbitrary, this does not qualitatively affect our results below. We impose zero water inflow as our Neumann boundary condition at the other three boundaries. The ice-marginal lake had an initial height of 30 m ( $l_h$  at  $t=0$ ). The evolution of the reference case through time is shown in Fig. 2, and the sensitivity of lake height ( $l_h$ ), flood discharge ( $Q_r$ ), and basal velocity magnitude ( $U_b$ ) through time is shown in Figs. 3 & 4).

### 3.1 Stable flood cycles

In our reference case, the ice-marginal lake undergoes recurrent, stable, and asymmetric lake filling and draining cycles (Fig. 2a). Likewise, each lake filling and draining cycle is associated with a recurring flood with stable maximum amplitude and duration (Fig. 2b). The lake only partially drains each flood cycle, and never reaches a height necessary to sustain flotation ( $N=0$ , Fig. 2f). For the initial 5 years of the simulation, as the model adjusts to initial conditions, peak flood discharge increases with each successive flood, and the lake reaches successively lower post-flood lowstands (Fig. 2a,b). Thereafter, the flood cycles reach a stable periodicity (Fig. 2f) and clockwise hysteresis with flood cycles occurring approximately every 1.5 years.

The evolution of the subglacial channel system through a single flood cycle is shown in Fig. 2c–e (an animated version is shown in SUPP MOVIE), and the width-averaged basal velocity response over the same flood cycle and into the following is shown in Fig. 2g. At the start of a flood cycle (Fig. 2c), as the lake approaches its highstand, the system is characterised by limited channelised drainage and  $\nabla\phi$  generally perpendicular to the ice surface slope. Close to the lake outlet ( $X > 9 \text{ km}$ ), contours of hydraulic potential appear concave forming a ‘ridge’ at the lake outlet. In GlaDS, sheet discharge,  $q_s$ , is directed perpendicular to these contours and such ridges indicate sheet flow out of the lake. Four short ( $< 100 \text{ m}$ ), low-discharge ( $\leq 1 \text{ m}^3 \text{ s}^{-1}$ ) channels remain open

**Table 2.** [NOTE, this fits in two-column mode!] Input parameters in our synthetic domain. The parameters we varied are highlighted in bold, with the reference case value given first and the range over which they varied in parentheses.

| Description                               | Symbol          | Value(s)                  | Units                                        |
|-------------------------------------------|-----------------|---------------------------|----------------------------------------------|
| Gravitational acceleration                | $g$             | 9.81                      | $\text{m s}^{-2}$                            |
| Latent heat                               | $L$             | $3.34 \times 10^5$        | $\text{J kg}^{-1}$                           |
| Ice density                               | $\rho_i$        | 917*                      | $\text{kg m}^{-3}$                           |
| Freshwater density                        | $\rho_w$        | 1000                      | $\text{kg m}^{-3}$                           |
| Pressure melt coefficient                 | $c_t$           | $7.5 \times 10^{-8}$      | $\text{K Pa}^{-1}$                           |
| Heat capacity of water                    | $c_w$           | FOLLOW UP                 | $\text{J kg}^{-1} \text{K}^{-1}$             |
| Glen’s $n$                                | $n$             | 3                         |                                              |
| Ice flow constant at the bed <sup>a</sup> | $A_b$           | $6.8 \times 10^{-24}$     | $\text{Pa}^{-n} \text{s}^{-1}$               |
| Bed elevation                             | $z_b$           |                           | $\text{m}$                                   |
| Ice thickness                             | $H$             |                           | $\text{m}$                                   |
| Budd friction coefficient                 | $C_b$           | 100                       |                                              |
| First friction law exponent               | $r$             | 1/4                       |                                              |
| Second friction law exponent              | $s$             | 1/4                       |                                              |
| Channel conductivity                      | $k_c$           | <b>0.1 (0.25–0.01)</b>    | $\text{m}^2 \text{ kg}^{-1/2} \text{s}^{-1}$ |
| Sheet conductivity <sup>b</sup>           | $k_s$           | <b>0.002 (0.05–0.005)</b> | $\text{Pa s}^{-1}$                           |
| Englacial void ratio                      | $e_v$           | $1 \times 10^{-4}$        |                                              |
| First sheet flow exponent                 | $\alpha_s$      | 5/4                       |                                              |
| Second sheet flow exponent                | $\beta_s$       | 3/2                       |                                              |
| First channel flow exponent               | $\alpha_c$      | 5/4                       |                                              |
| Second channel flow exponent              | $\beta_c$       | 3/2                       |                                              |
| Transition parameter                      | $\omega$        | 1/2000                    |                                              |
| Basal bump height                         | $h_b$           | <b>0.1 (0.2–0.05)</b>     | $\text{m}$                                   |
| Channel sheet width                       | $l_c$           | <b>20 (50–5)</b>          | $\text{m}$                                   |
| Cavity spacing                            | $l_r$           | <b>5 (20–1)</b>           | $\text{m}$                                   |
| Basal melt rate                           | $M_r$           | <b>0.25 (5–0.1)</b>       | $\text{m a}^{-1}$                            |
| Lake refill rate                          | $Q_{in}$        | <b>10 (20–5)</b>          | $\text{m}^3 \text{s}^{-1}$                   |
| Elastic sheet depth scale                 | $h_c$           | 0                         | $\text{m}$                                   |
| Elastic sheet exponent                    | $\gamma$        | 1                         |                                              |
| Uplift regularisation rate                | $h_\varepsilon$ | $1 \times 10^{-6}$        | $\text{m Pa}^{-1}$                           |
| Regularising pressure                     | $N_\varepsilon$ | $1 \times 10^4$           | $\text{Pa}$                                  |

<sup>a</sup>The bed is assumed to be at pressure melting point, but the ice column is assumed equivalent to  $-10^\circ \text{C}$  or  $A = 4.9 \times 10^{-25} \text{ Pa}^{-n} \text{s}^{-1}$

<sup>b</sup>Note that following Hill and others (2024) the units for  $k_s$  differ from those given by Werder and others (2013)

following the previous flood cycle, three at the terminus and one connected to the lake outlet.

During the lake filling phase, increasing  $l_h$  drives  $\phi_{\text{outlet}}$  up (Eq. 5), resulting in a steeper  $\nabla\phi$  across the domain and promoting channelised drainage close to the lake outlet [SUPP MOVIE]. During the lake drainage phase, initiated once  $Q_r$  begins to rapidly exceed the lake refill rate,  $Q_{\text{in}}$  (when  $l_h \approx 75$  m and  $t \approx 7.9$  yrs) an arborescent channel structure originating from the lake outlet extends across the full-width of the domain, perpendicular to the contours of  $\phi$ , and therefore offset to the direction of ice-surface slope. Simultaneously, channels extend upglacier from the terminus, and contours of  $\phi$  become increasingly convex. At the flood peak channel tributaries coalesce into the three primary terminus channels which evacuate water from the system. As the lake level drops sharply during a flood,  $\phi_{\text{outlet}}$  drops, reducing  $\nabla\phi$ , and in turn reducing  $Q_c$  below the level necessary to sustain channels across the domain, including at the lake outlet. Once  $Q_r < Q_{\text{in}}$  the flood terminates and the cycle begins anew. Each cycle takes  $\approx 1.5$  years with the rapidly rising and falling limb of the flood lasting  $\approx 6$  months.

Basal velocity,  $U_b$  changes significantly throughout a flood cycle and tracking the development of a significant channelised drainage system (e.g., Fig. 2d). Our synthetic glacier gradually accelerating during the flood initiation phase before channelised drainage is widely established, then abruptly decelerating  $\approx$  two months before the flood peak (Fig. 2g) once channels are well established. Ice flow acceleration propagates from the lake outlet towards the terminus, with maximum velocity sustained within 2 km of the lake outlet.

### 3.2 Parameter sensitivity

Fig. 3 shows the time series from a total of 14 simulations across the maximum (red lines), minimum (blue lines) parameter values with the reference ‘mid-point’ simulation in grey. The majority of simulations yield stable and recurring asymmetric lake filling and drainage cycles (Fig. 3a[i]–f[i]) with corresponding floods in channel discharge at the lake outlet,  $Q_r$  (Fig. 3a[ii]–f[ii]). Amongst the parameters tested, the clearest influence is on the amplitude of lake height and its rate of change, both of which in turn influence the timing of flood initiation and peak flood discharge, with higher amplitude flood cycles leading to higher peak flood discharges.

Increasing channel conductivity,  $k_c$ , in effect making channels more sensitive to  $\nabla\phi$  (see Eq. A11), leads to lower lake highstands, higher peak discharge, earlier flood onsets and total lake drainage. At maximum  $k_c$  the model becomes physically unstable—the lake drains completely each flood cycle as peak discharge and flood duration increase until

$\sim 12$  years into the simulation when  $Q_r$  increases rapidly and continuously. Conversely, at minimum  $k_c$ , the capacity of channels to drain the lake is inhibited and flood onset is delayed. Because channels grow slowly, peak  $Q_r$  is also dampened leading to relatively long flood cycle durations ( $\sim 5$  years).

Increasing the sheet conductivity,  $k_s$  increases the capacity of the sheet to accommodate water and delays transmission to channels, this results in reduced lake highstands and delayed flood initiation as the onset of classical channel growth is delayed. Reducing  $k_s$  increases the relative efficiency of channels and leads to more vigorous lake-fill drain cycles, which shorter and more intense floods as a result. Changing  $h_b$  has a similar effect to reducing  $k_s$ , although at the maximum bump height, the sheet becomes so efficient that it can accommodate all lake discharge and within 1 year the lake reaches a stable equilibrium where  $Q_r = Q_{\text{in}}$ .

Changing the contributing width of the sheet to the channel ( $l_c$ ) or the representative horizontal spacing of cavities ( $l_r$ ) has similar influence on lake drainage by altering the relative efficiency of channelised and sheet drainage. Reducing  $l_r$  and increasing  $l_c$  reduces the amplitude of lake height and lowers peak discharge, and vice versa when increasing  $l_r$  and reducing  $l_c$ .

Finally, increasing input of water into the either the glacier via basal melt rate,  $M_r$  or lake via  $Q_{\text{in}}$  enhances the amplitude of  $l_h$  oscillations and in turn peak flood discharge.

In all simulations, the maximum lake height remains below the maximum ice thickness and does not surpass the effective pressure  $N = 0$  necessary to initiate ice flotation. In the majority of simulations the lake lowstand does not fall below  $\sim 10$  m, only draining completely when  $k_c = 0.25 \text{ m}^{\frac{3}{2}} \text{ kg}^{-\frac{1}{2}}$ , and when  $h_b = 0.05$  m.

The characteristics of the lake filling-drainage cycle across our parameter space also strongly influences the resulting basal velocity signal, and Figure 4 shows the width-averaged velocity during at least one complete flood cycle for  $k_c$ ,  $k_s$ , and  $h_b$ . Each model follows the reference case with velocity peaking before peak discharge is reached, and dropping rapidly thereafter along the falling limb of a flood. In general, shorter more intense flood cycles lead to a more rapid and higher magnitude velocity response, whereas more broad and less intense flood cycles yield a similar velocity response, maintaining peak velocity for a longer duration. However, the highest basal velocity ( $> 300 \text{ m a}^{-1}$ ) is associated with the low  $k_c$  case (Fig. 4), characterised by muted lake filling-drainage cycles but a relatively high lake-level (Fig. 3a[i]).

## 4 MODEL APPLICATION TO A REAL DOMAIN

We run the model on Isunnguata Sermia, an outlet glacier in West Greenland draining a catchment of  $\approx 16\,000\text{ km}^2$ . A recently described  $\approx 3\text{ km}^2$ ,  $\approx 100\text{ m}$  deep ice-dammed lake (Dømgård and others, 2024; Livingstone and others, 2025) abuts the northern margin of Isunnguata Sermia’s tongue. The lake drains subglacially with a periodicity of 1–3 years, undergoing at least 12 fill-drain cycles in the observational period between 1987–2024 (Livingstone and others, 2025). Two clear ice-contact boundaries are visible between Isunnguata Sermia and its ice-marginal lake (Figure 5), with the lake predominately draining subglacially along a contact at the western lake margin, and refilling by a proglacial river at the eastern lake margin (Livingstone and others, 2025).

We discretise our Isunnguata Sermia domain (Source of original catchment?) using an anisotropic mesh with an edge length of  $XX\text{ m}$  close to terminus, dropping to  $XX\text{ km}$  close to the upper margin of our domain at the approximate ELA (at  $H \approx 1600\text{ m}$ ). Bedmachine v5 is used for  $z_b$  and  $H$  (?). As climate forcing, we used the 10 km resolution daily Modèle Atmosphérique Régional (MAR, v3.14) runoff and accumulation data (Fettweis and others, 2017) between 2013–2024. An initialisation  $U_b$  is taken from the 2021 MEaSUREs annual mosaic (Joughin and others, 2015), from which we invert for the basal friction coefficient using an L-curve scheme (following; Wolovick and others, 2023). Because we have an observational constraint on ice-surface velocity, we use a Schoof-style friction law (see Eq. 2, Section 2.1) which has been shown to more faithfully represent ice-dynamics with a GlaDS derived  $N$  than the Budd-style friction law used in our simple synthetic experiments (McArthur and others, 2023). Geothermal heat flux is taken from (Shapiro and Ritzwoller, 2004), basal melt rates are taken from Karlsson and others (2021) and surface ice temperature is taken from (Ettema and others, 2009).

Our GlaDS parameters are given in Tables 2 & A.1, with changes to the specific values intended to reflect the anticipated change in the scale of basal drainage elements relative to our synthetic domain (Hill and others, 2024). As boundary conditions, we set  $\phi$  equivalent to atmospheric pressure at the lowest elevation vertices within a cluster adjacent to a proglacial river at the glacier terminus, and set two ice-contact boundaries at the lowest elevation nodes along the western and eastern lake boundaries.

Our experimental approach was split into two phases, the first of which was to obtain a basal friction coefficient  $C$ . We ran an initial inversion for  $C$  using an empirically-derived  $N$  taking into account bed topography and ice thick-

**Table 3.** Parameters in our Greenland run, listing those which differ from Table 2

| Variable | Units | Description |
|----------|-------|-------------|
|----------|-------|-------------|

ness, before running a simple GlaDS-only model run over 10 years, which did not an ice-marginal lake or surface melt, to derive a more realistic and spatially variable  $N$  from which a second inversion for basal friction could be obtained. This approach has previously been demonstrated to yield more faithful basal inversions in a coupled hydrology model (see; Ehrenfeucht and others, 2023; McArthur and others, 2023).

Our primary model phase, in which we ran our model for a total of 45 years with a 5 minute timestep, consisted of a steady state phase, followed by a ‘spin-up’ into a full transient simulation. In the steady state phase, we ran our model for 30 years, until the 95<sup>th</sup> percentile difference in sheet thickness between successive timesteps fell below  $1 \times 10^{-6}\text{ m}$ . During the steady state phase, we allowed the ice-marginal lake to freely evolve from an initial height of  $l_h = 30\text{ m}$ . This steady state phase allowed the model to reach a condition which approximates wintertime hydrological conditions where there is limited channel activity and water pressures across the domain are close to the flotation fraction ( $p_w \approx 0.7\text{--}0.9p_i$ ). In the transient phase, taking the results of the steady-state run as initial conditions, we spun our model up over five years with a climate forcing that was gradually introduced by increasing the 2013 runoff by 20% each year. Following this spin-up, the full transient simulation proceeded from 2013 onwards using the complete MAR timeseries from 2013–2024.

## 5 DISCUSSION

model reproduces 1) many observed characteristics of Jökulhlaup theory, 2) matches well with Felix and Jonny’s work, and 3) successfully reproduces many of the characteristics of IS flooding

However it is not perfect, initial conditions are a key uncertainty, as well as the other physically uncertain GlaDS parameters, noting we only carried out a partial sweep here, others were run but had limited influence on drainage characteristics. Something akin to Tim’s Gaussian GP emulation might offer a way to more rapidly test the parameter space and select an optimum starting condition.

Future work

## 6 CONCLUSIONS

## 7 AUTHOR CONTRIBUTION STATEMENT

The research was conceptualised by AJH, SB, AS, and SL. AJH developed the model, carried out the experiments, and prepared the analysis. AJH wrote the manuscript, with input from SB, AS, and SL. All authors reviewed and edited the manuscript, and fieldwork to deploy and maintain the sensors was carried out by everyone other than AJH [sad-face]. Fellowship funding was acquired by AJH and project funding by SL, RS, SB, AS, KL, KW, JG, EB, NR, LE, BG, TH, MPJ and AB.

## 8 ACKNOWLEDGEMENTS

A.J.H is funded by an Aberystwyth University Independent Research Fellowship. Work carried out as part of the NERC-funded SLIDE project (grant No. NE/X000257/1, awarded to S.L.).

## 9 PROPER NOUNS WILL BE CORRECTED IN REFERENCES PRE-SUBMISSION...

## REFERENCES

- Choi Y, Seroussi H, Morlighem M, Schlegel NJ and Gardner A (2023) Impact of time-dependent data assimilation on ice flow model initialization and projections: a case study of kjer glacier, greenland. *The Cryosphere*, **17**(12), 5499–5517
- Dømgaard M, Kjeldsen K, How P and Bjørk A (2024) Altimetry-based ice-marginal lake water level changes in greenland. *Communications Earth & Environment*, **5**(1), 365
- Ehrenfeucht S, Morlighem M, Rignot E, Dow CF and Mouginot J (2023) Seasonal acceleration of petermann glacier, greenland, from changes in subglacial hydrology. *Geophysical Research Letters*, **50**(1), e2022GL098009
- Ettema J, van den Broeke MR, van Meijgaard E, van de Berg WJ, Bamber JL, Box JE and Bales RC (2009) Higher surface mass balance of the greenland ice sheet revealed by high-resolution climate modeling. *Geophysical Research Letters*, **36**(12)
- Fettweis X, Box JE, Agosta C, Amory C, Kittel C, Lang C, Van As D, Machguth H and Gallée H (2017) Reconstructions of the 1900–2015 greenland ice sheet surface mass balance using the regional climate mar model. *The Cryosphere*, **11**(2), 1015–1033
- Hewitt I (2013) Seasonal changes in ice sheet motion due to melt water lubrication. *Earth and Planetary Science Letters*, **371**, 16–25
- Hill T, Flowers GE, Hoffman MJ, Bingham D and Werder MA (2024) Improved representation of laminar and turbulent sheet flow in subglacial drainage models. *Journal of Glaciology*, **70**, e24
- Joughin I, Smith B, Howat I and Scambos T (2015) Measures greenland ice sheet velocity map from insar data, version 2 (doi: 10.5067/OC7B04ZM9G6Q)
- Kamb B (1987) Glacier surge mechanism based on linked cavity configuration of the basal water conduit system. *Journal of Geophysical Research: Solid Earth*, **92**(B9), 9083–9100
- Karlsson NB, Solgaard AM, Mankoff KD, Gillet-Chaulet F, MacGregor JA, Box JE, Citterio M, Colgan WT, Larsen SH, Kjeldsen KK and others (2021) A first constraint on basal melt-water production of the greenland ice sheet. *Nature Communications*, **12**(1), 3461
- Khan SA, Morlighem M, Ehrenfeucht S, Seroussi H, Choi Y, Rignot E, Humbert A, Pickell D and Hassan J (2024) Inland summer speedup at zachariæ isstrøm, northeast greenland, driven by subglacial hydrology. *Geophysical Research Letters*, **51**(18), e2024GL110691
- Kingslake J and Ng F (2013) Modelling the coupling of flood discharge with glacier flow during jökulhlaups. *Annals of Glaciology*, **54**(63), 25–31
- Larour E, Seroussi H, Morlighem M and Rignot E (2012) Continental scale, high order, high spatial resolution, ice sheet modeling using the ice sheet system model (issm). *Journal of Geophysical Research: Earth Surface*, **117**(F1)
- Livingstone S, Storrar R, Doyle S, Thorpe S, Moffatt A, Sole A, Chudley TR, Gimbert F, Graly J, Licht K and others (2025) Ice dynamic and hydrological response to ice-dammed lake drainages at isunnguata sermia, west greenland
- McArthur K, McCormack FS and Dow CF (2023) Basal conditions of denman glacier from glacier hydrology and ice dynamics modeling. *The Cryosphere Discussions*, **2023**, 1–29
- Ng F and Liu S (2009) Temporal dynamics of a jökulhlaup system. *Journal of Glaciology*, **55**(192), 651–665
- Shapiro NM and Ritzwoller MH (2004) Inferring surface heat flux distributions guided by a global seismic model: particular application to antarctica. *Earth and Planetary Science Letters*, **223**(1–2), 213–224
- Stevens LA, Nettles M, Davis JL, Creyts TT, Kingslake J, Hewitt IJ and Stubblefield A (2022) Tidewater-glacier re-

sponse to supraglacial lake drainage. *Nature Communications*, **13**(1), 6065

Walder JS and Fowler A (1994) Channelized subglacial drainage over a deformable bed. *Journal of glaciology*, **40**(134), 3–15

Werder MA, Hewitt IJ, Schoof CG and Flowers GE (2013) Modeling channelized and distributed subglacial drainage in two dimensions. *Journal of Geophysical Research: Earth Surface*, **118**(4), 2140–2158

Wolovick M, Humbert A, Kleiner T and Rückamp M (2023) Regularization and l-curves in ice sheet inverse models: a case study in the filchner–ronne catchment. *The Cryosphere*, **17**(12), 5027–5060

## A ADDITIONAL MODEL DESCRIPTION

### A.1 The Glacier Drainage System model

As described fully in Werder and others (2013), the hydraulic potential at the bed,  $\phi$ , is defined at the bed by:

$$\phi = \phi_m + p_w, \quad (A1)$$

with water pressure,  $p_w$ , and elevation potential

$$\phi_m = \rho_w g z_b, \quad (A2)$$

where  $\rho_w$  is water density,  $g$  is gravitational acceleration and  $z_b$  is bed elevation. In turn, effective pressure  $N$  is given by:

$$N = p_i - p_w = \phi_o - \phi, \quad (A3)$$

where  $p_i$  is ice overburden pressure ( $p_i = \rho_i g H$ ) and  $\phi_o$  is the overburden potential ( $\phi_o = \phi_m + p_i$ ).

In the original GlaDS (Werder and others, 2013), sheet discharge,  $q_s$  is given by:

$$q_s = -k_s h_s^\alpha |\nabla \phi|^\beta \nabla \phi, \quad (A4)$$

where  $k_s$  is the sheet conductivity;  $h_s$  is the sheet thickness; and  $\alpha$  and  $\beta$  are flow exponents. Following the Darcy-Weisbach law, when flow is fully turbulent the flow exponents  $\alpha = 5/4$  and  $\beta = 3/2$ . Here we use the Hill and others (2024) laminar-turbulent transition model, and with  $\alpha_s = 5/4$  as here, Eq A4 becomes:

$$q_s = -\frac{\nu}{2\omega} \left( \frac{h_b}{h_s} \right)^{1/2} \cdot \left( -1 + \sqrt{1 + 4 \frac{\omega}{\nu} \left( \frac{h}{h_b} \right)^{1/2} k_s h^3 |\nabla \phi|} \right) \frac{\nabla \phi}{|\nabla \phi|} \quad (A5)$$

where  $\omega$  is a laminar–turbulent transition parameter (corresponding to the Reynolds number at which water becomes fully-turbulent),  $h_b$  is the bed bump height, and  $\nu$  is the kinematic viscosity of water at 0°C.

In GlaDS, sheet thickness refers to the thickness of the cavity layer only and there is no representation of viscoelastic deformation of the overlying ice once  $p_w > p_i$ . Here, following Stevens and others (2022, based on earlier work by Hewitt 2013), we separate the distributed sheet into elastic sheet thickness  $h_{el}$ , and cavity sheet thickness  $h_{cav}$ , adding them together to give the overall sheet thickness,  $h_s = h_{el} + h_{cav}$ . The elastic sheet thickness is directly related to the water pressure by:

$$h_{el} = h_c \left( \frac{p_w}{p_i} \right)^\gamma + h_{\varepsilon 2} \left[ -N_- + \frac{1}{2} N_\varepsilon (1 - N_+/N_\varepsilon)_+^2 \right], \quad (A6)$$

where  $h_c$  is the elastic sheet depth scale,  $\gamma$ , is the elastic sheet exponent,  $h_\varepsilon$  is the uplift regularisation rate, and  $N_\varepsilon$  is the regularising pressure for uplift regularisation rate. In addition,  $N_- = \min(N, 0)$  and  $N_+ = \max(N, 0)$ , with the second term designed to increase rapidly once  $N < 0$ , as a basic representation of hydraulic jacking.

The cavity sheet thickness evolves through time given by:

$$\frac{\partial h_{cav}}{\partial t} = w - r, \quad (A7)$$

for functions  $w$  and  $r$ , which describe the cavity opening and closing rate, respectively (Kamb, 1987; Walder and Fowler, 1994). Cavities open at a rate given by basal velocity  $U_b$  over basal bumps with height,  $h_b$ :

$$w(h) = \begin{cases} U_b(h_r - h_s)/l_r & \text{if } h < h_r \\ 0 & \text{otherwise} \end{cases} \quad (A8)$$

[CHECK CODE TO ENSURE THIS IS  $h_s$  not  $h_{cav}$ ] where  $l_r$  is the horizontal cavity spacing. Viscous ice deformation leads to cavity closure, related to the effective pressure,  $N$  by:

$$r(h, N) = A h |N|^{n-1} N, \quad (A9)$$

where  $A$  is the rheological constant of ice, multiplied by a first order geometrical factor ( $h$ , but double check it is sheet thickness), and  $n$  is Glen's flow law exponent.

Sheet elements exchange water with channels, the cross-sectional of which,  $S$ , evolve through time due to the dissipation of potential energy,  $\Pi$ , sensible heat exchange,  $\Xi$ , and cavity closure rates due to viscous ice creep  $v_c$




$$\frac{\partial S}{\partial t} = \frac{\Xi - \Pi}{\rho_i L} - v_c, \quad (\text{A10})$$

where  $\rho_i$  is the ice density and  $L$  is the latent heat of fusion.


Finally, channel discharge,  $Q_c$  is also related to the hydraulic potential gradient by:

$$Q_c = -k_c S^{\alpha_c} \left| \frac{\partial \phi}{\partial s} \right|^{\beta_c - 2} \frac{\partial \phi}{\partial s}, \quad (\text{A11})$$

where  $k_c$  is the channel conductivity;  $s$  is the horizontal coordinate along a channel; and  $\alpha_c/\beta_c$  are channel flow exponents.

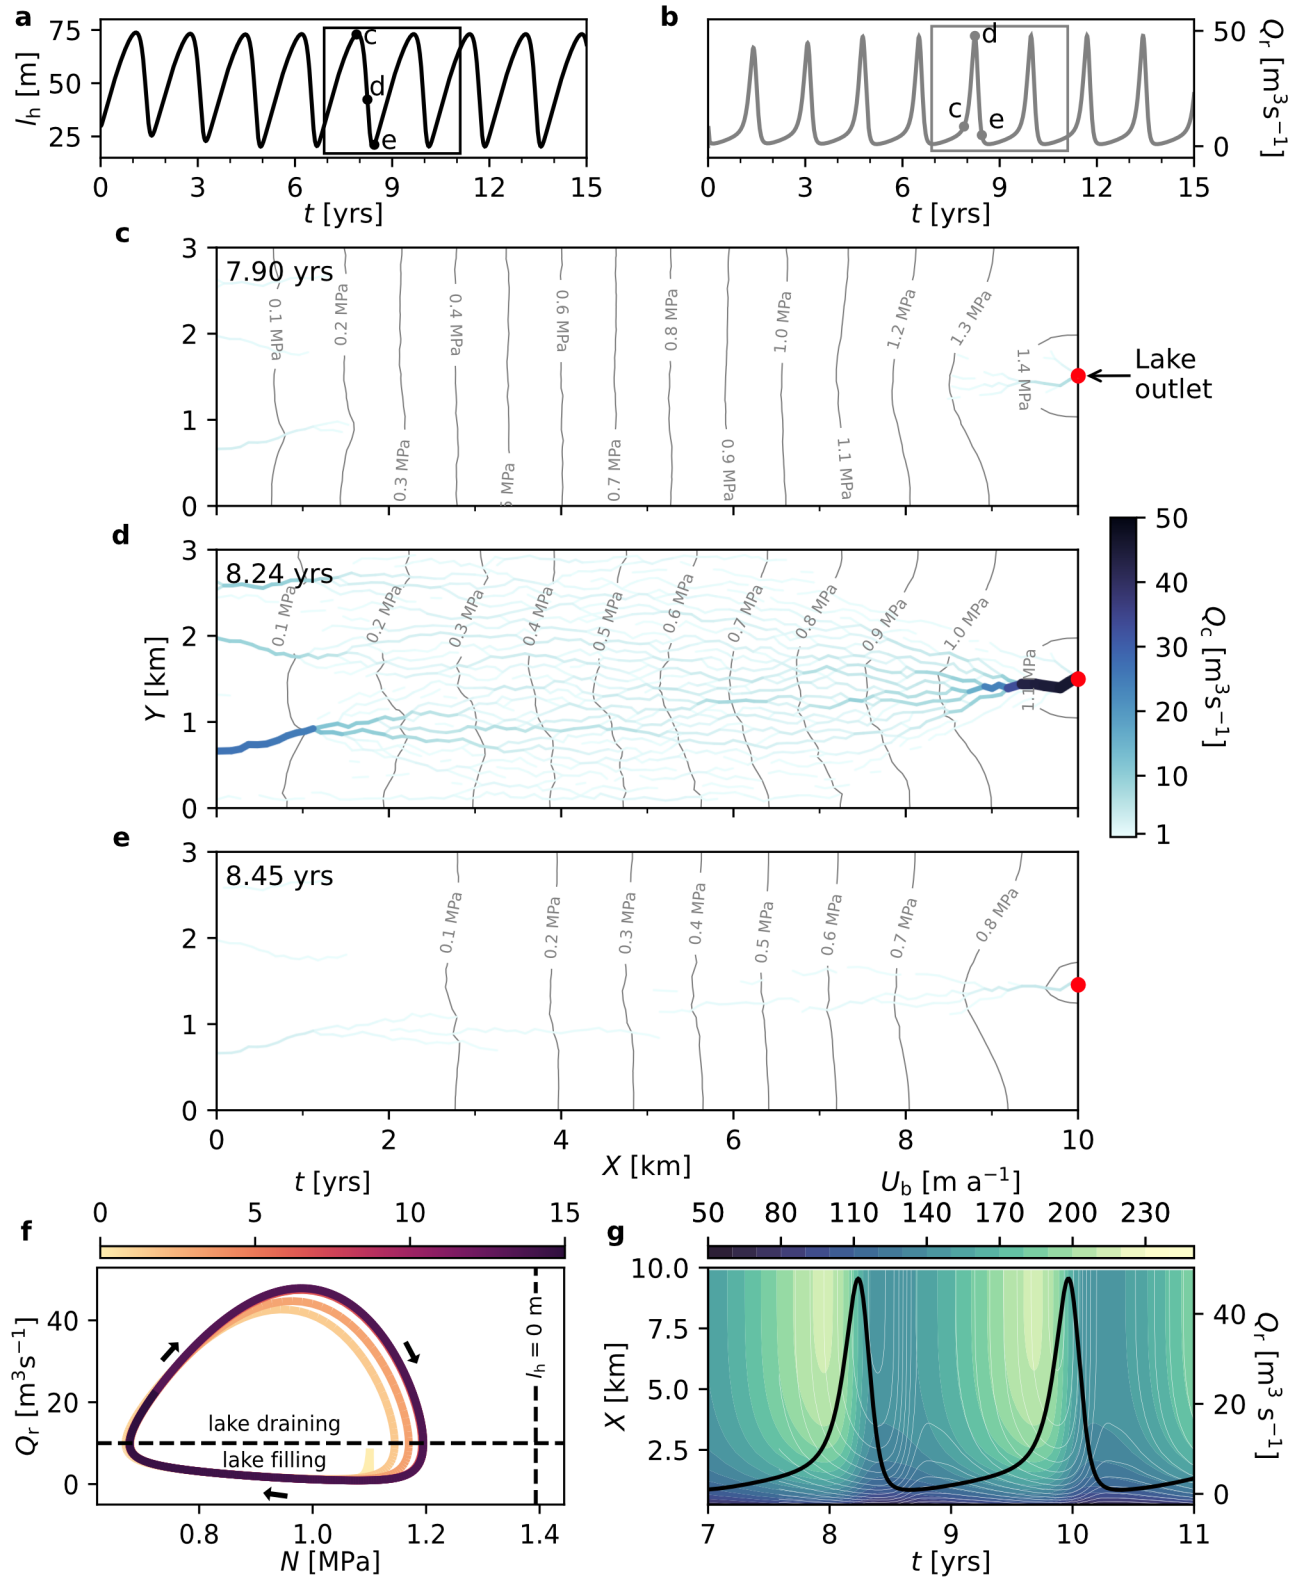

**Fig. 2.** [CHANGE  $N$  IN F TO BE  $\phi$ , move channels to separate 5 panel figure] Evolution of the 'reference' model configuration in our synthetic modelling domain. **a)** Lake height,  $l_h$  through time. Black points indicate  $l_h$  in panels **c–e**. **b)** Sum discharge at the lake outlet,  $Q_r$  through time. Grey points indicate  $Q_r$  in panels **c–e** the grey box indicates the time span of panel **g**. **c–e)** Channel discharge,  $Q_c$  at  $t = 7.10$  years (**c**),  $8.38$  years (**d**) and  $9.00$  years (**e**). In each panel, effective pressure,  $N$  is shown as grey contours. Note the changes in colour bar scale between each panel. **f)** Phase-plane diagram showing the evolution of  $Q_r$  and  $N$  through time at the ice-marginal lake outlet. Arrows and shading indicate the direction of time. The horizontal dashed line denotes the lake refill rate,  $Q_{in} = 10 \text{ m}^3 \text{ s}^{-1}$ . The vertical dashed line indicates  $N$  when  $l_h = 0 \text{ m}$ . **g)** Filled contour plot showing the across-flow averaged velocity through time. White contours represent velocity (every  $10 \text{ m a}^{-1}$ ) and the black line shows  $Q_r$  between years 7–11.

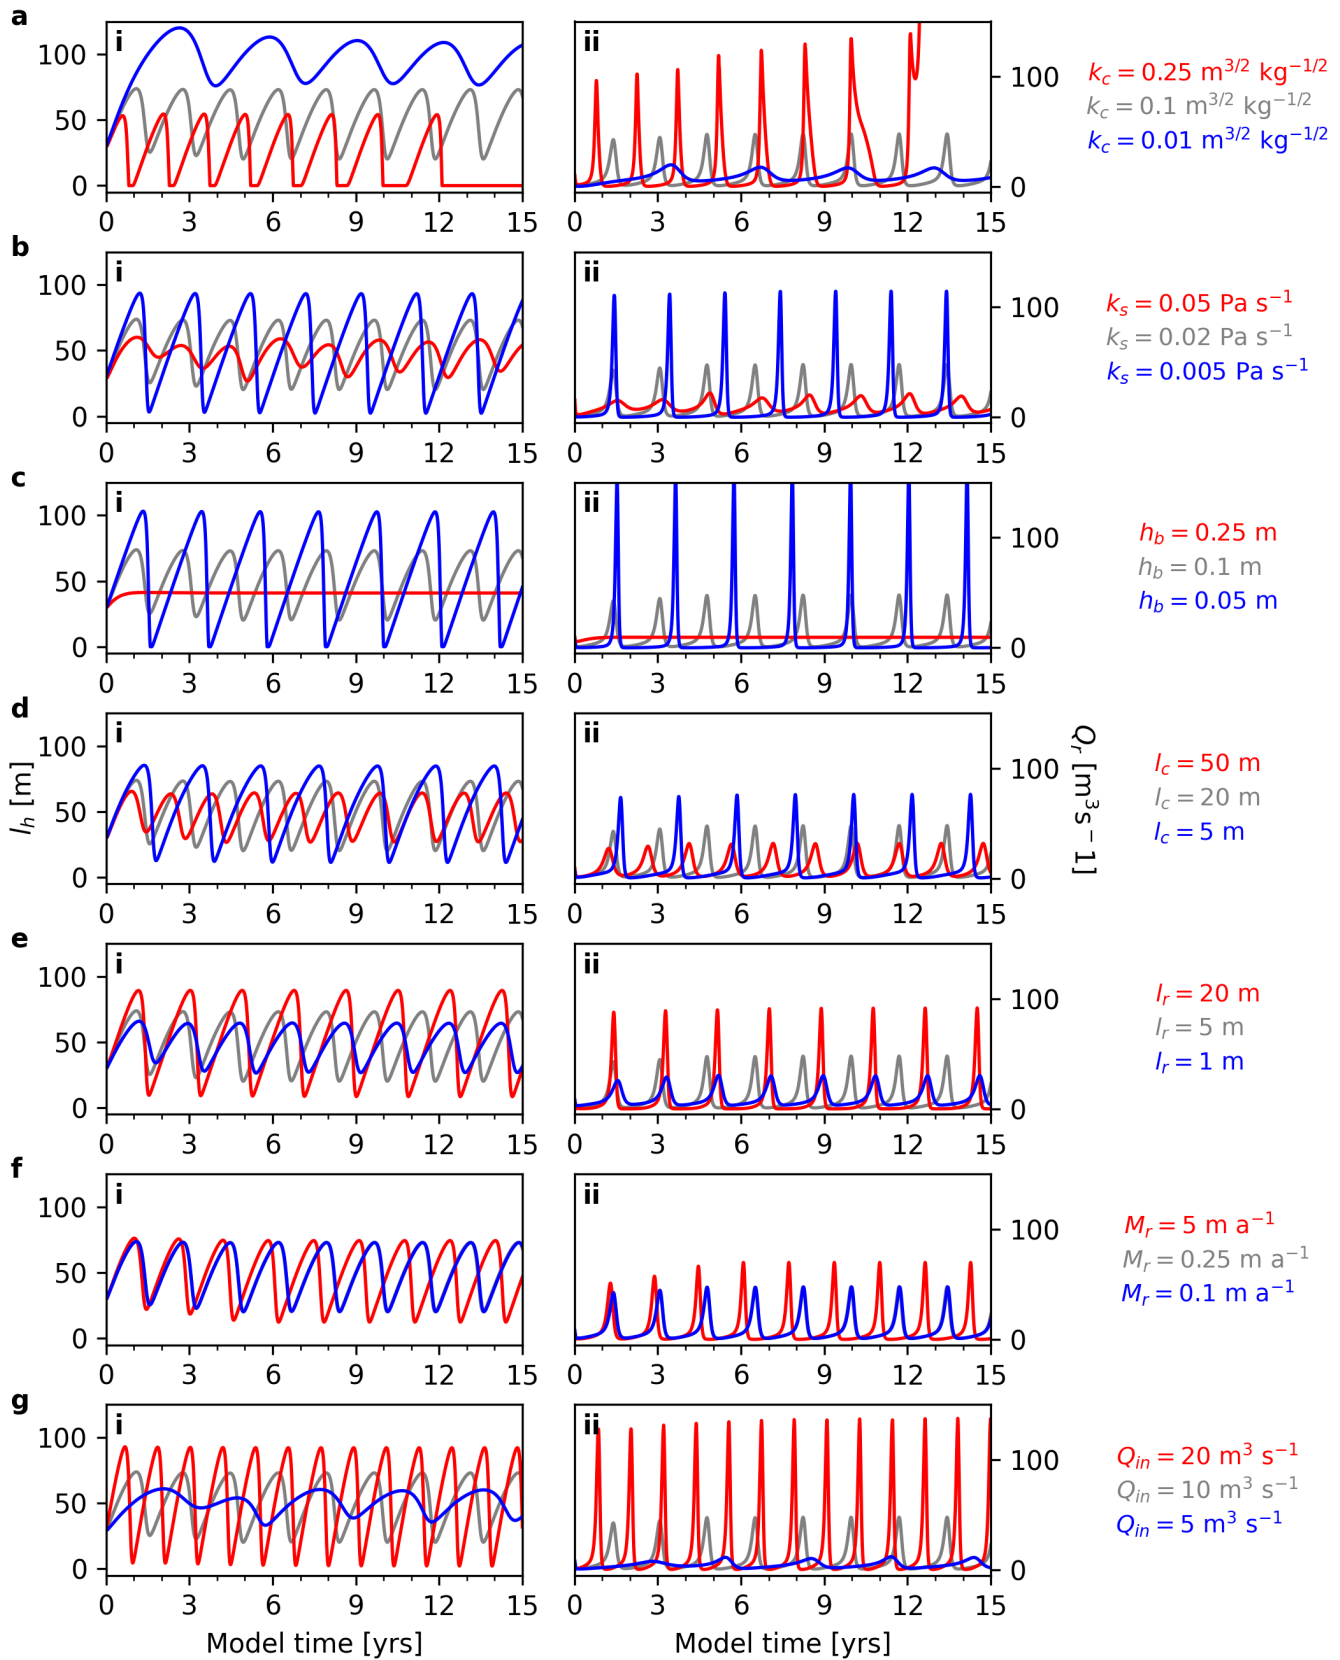

**Fig. 3. NOT FINAL VERSION!** Lake height,  $l_h$  (left panels, i) and sum discharge at the lake outlet,  $Q_r$  (right panels, ii) across a range of key model parameters. **a)** Channel conductivity,  $k_c$ . **b)** Sheet conductivity,  $k_s$ . **c)** Basal bump height,  $h_b$ . **d)** Channel sheet width,  $l_c$ . **e)** Cavity spacing,  $l_r$ . **f)** Basal melt rate,  $M_r$ . **g)** Lake refill rate,  $Q_{in}$ . In all panels, the default parameter run is shown in grey.

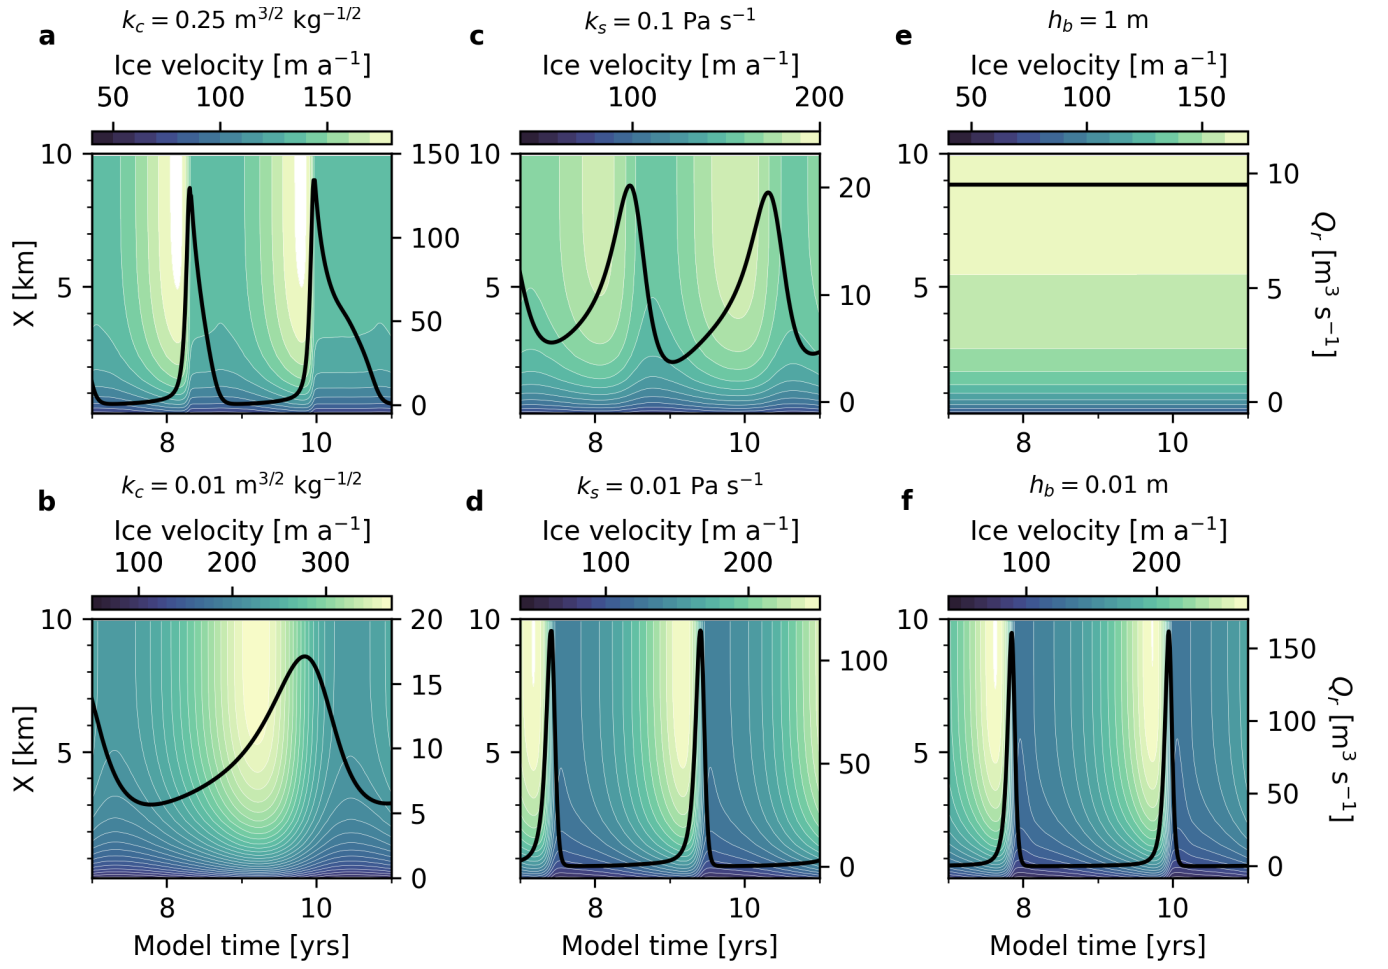


Fig. 4. NOT FINAL VERSION!


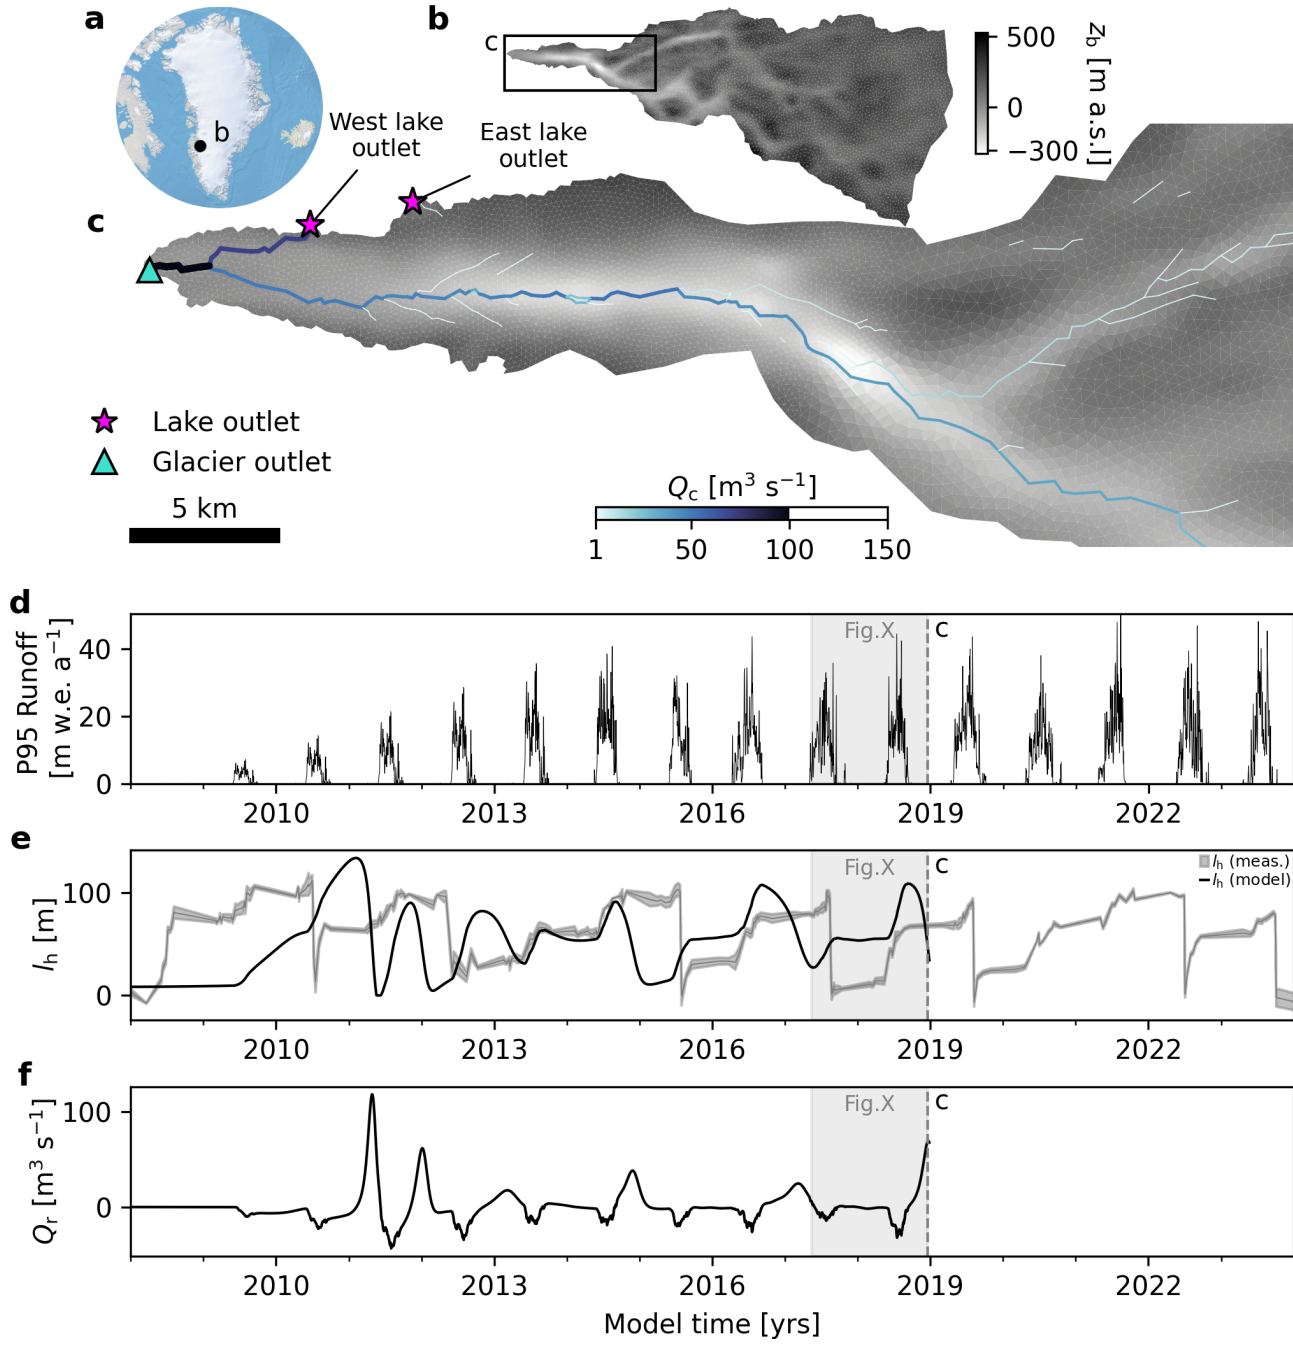


Fig. 5. NOT FINAL VERSION!

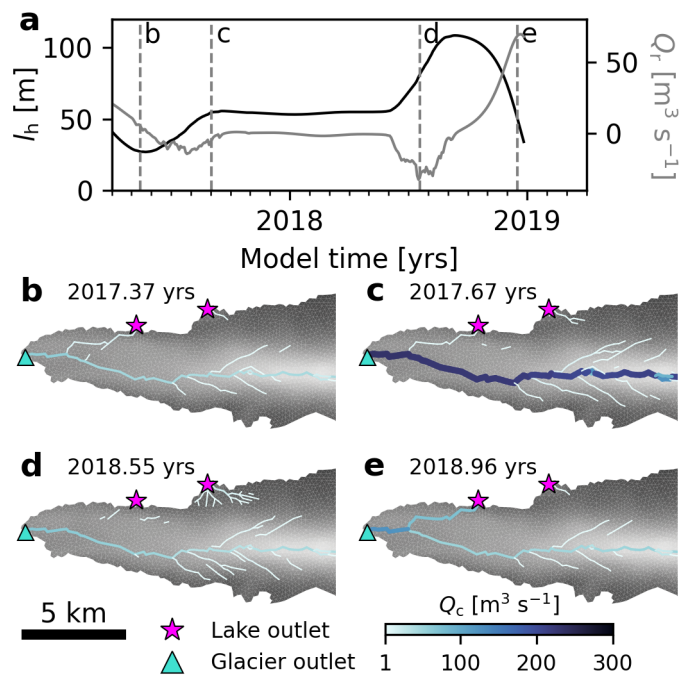

**Fig. 6. NOT FINAL VERSION!**[SINGLE-COLUMN]