



[V-MIX FIX]

THE STATIONARY MIXER



V-MIX Fix stationary mixers can be custom-tailored to meet your individual requirements. You provide us with the parameters, and we deliver the ideal machine. Integration in feeding systems is no problem.

Our priority is to provide you with the perfect machine. Our experience allows us to fully incorporate the advantages of a tractor-drawn V-MIX in the stationary version.

[V-MIX FIX]

THE STATIONARY MIXER


Welded
straw ring



On-board
hydraulics



Separate
carrier frame

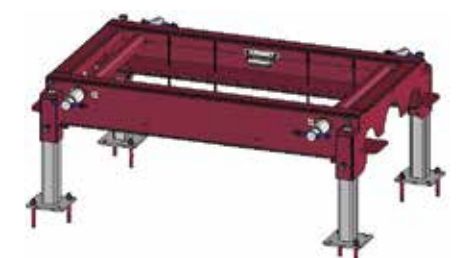


Discharge
variants



Different
side elevators



Centering
mixing auger

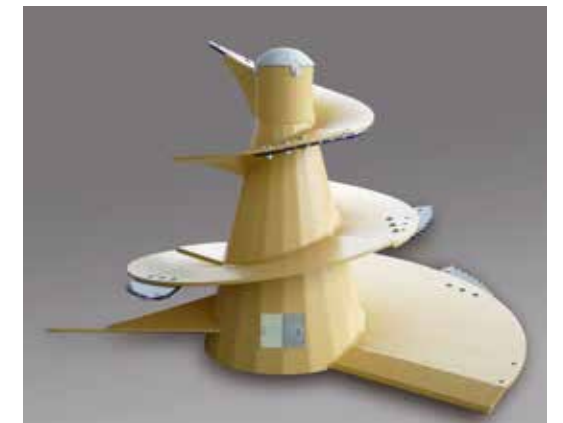

Switch cabinet



Uninterrupted drivetrain



Direct power drive
in one drivetrain





TECHNICAL DATA

Typ	Volume	Length without engine	Length with engine 22kW	Length with engine 30kW	Length with engine 37kW	Width without discharge	Height at frame (600mm)	Height at frame (700mm)	Height at frame (800mm)	Height at frame (900mm)
	m ³	mm	mm	mm	mm	mm	mm	mm	mm	mm
6,5-1S	6,3	2890	3365	3420	3495	2030	2280	2380	2480	2580
8-1S	7,6	2950	3395	3450	3525	2030	2420	2520	2620	2720
9-1S	8,6	3170	3505	3560	3635	2230	2380	2480	2580	2680
10H-1S	9,1	3110	3475	3530	3605	2030	2720	2820	2920	3020
10N-1S	9,9	3280	3560	3615	3690	2330	2395	2495	2595	2695
11-1S	11	3390	3615	3670	3745	2230	2770	2870	2970	3070
12-1S	12,1	3480	3660	3715	3790	2330	2770	2870	2970	3070
14-1S	14,2	3650	3745	3800	5615	2430	2880	2980	3080	3180

Typ	Volume	Length without engine	Length with engine 22kW	Length with engine 30kW	Length with engine 37kW	Width without discharge	Height at frame (600mm)	Height at frame (700mm)	Height at frame (800mm)	Height at frame (900mm)
	m ³	mm	mm	mm	mm	mm	mm	mm	mm	mm
13-2S	13,6	4870	5335	5390	5465	2030	2300	2400	2500	2600
15-2S	15,5	4970	5385	5440	5515	2030	2500	2600	2700	2800
15N-2S	15,4	5300	5670	5725	5800	2270	2230	2330	2430	2530
17-2S	17,3	5070	5435	5490	5565	2030	2700	2800	2900	3000
17N-2S	17,1	5380	5710	5765	5840	2270	2380	2480	2580	2680
20-2S	19,7	5570	5855	5910	7450	2370	2400	2500	2600	2700
20H-2S	19,8	5480	5760	5815	5890	2270	2570	2670	2770	2870
22-2S	21,5	5665	5902,5	5957,5	6032,5	2370	2540	2640	2740	2840
24H-2S	23,2	5675	5857,5	5912,5	5987,5	2270	2930	3030	3130	3230
24-2S	23,6	5770	5955	6010	6085	2370	2770	2870	2970	3070
27-2S	26,2	5900	6020	6075	6150	2370	3000	3100	3200	3300
30H-2S	29,5	6050	6095	6150	6225	2370	3280	3380	3480	3580