

Spiking Reservoir State-Space Encoding for Perturbation-Characterized Affective EEG Signal Analysis

Andrew A. Lane*, Wendy Tang*, and Brady D. Nelson†

*Department of Electrical and Computer Engineering, Stony Brook University, Stony Brook, NY, USA

†Department of Psychology, Stony Brook University, Stony Brook, NY, USA

Abstract—Affective electroencephalographic (EEG) event-related potentials (ERPs) are noisy, subject-dependent, and only partially observed projections of neural dynamics. Endpoint accuracy alone does not reveal what temporal information a representation retains or discards, and the perturbation behavior of spiking-reservoir encodings for affective ERP has not been systematically reported. We define a fixed leaky integrate-and-fire (LIF) reservoir with a six-bin spike-count (BSC_6) code as a temporal encoding operator, compress it for a linear readout, and audit it under subject-grouped validation against a classical EEG/ERP baseline and under amplitude-noise, temporal-jitter, and channel-dropout perturbations. The reservoir embedding does not exceed the classical baseline on clean classification (balanced accuracy 0.463 vs. 0.485) yet degrades more gradually under representation-level amplitude noise and channel dropout. Controls show this robustness is not a dimensionality artifact (a dimensionality-matched random projection of the baseline degrades like the baseline) and that all encodings exceed a label-permutation null; an ablation further shows that a single-bin total spike count matches the six-bin code, so the operative factor is the fixed reservoir embedding rather than temporal bin granularity.

Index Terms—EEG, event-related potentials, spiking neural networks, reservoir computing, biomedical signal processing, affective computing, perturbation analysis.

I. INTRODUCTION

Electroencephalographic event-related potentials (ERPs) are time-locked measurements of neural response dynamics that offer millisecond-scale temporal information for biomedical data analysis, yet the observed waveform is a noisy, low-dimensional, and subject-dependent projection of an unobserved neural dynamical system [12], [13]. Inter-subject variability, trial averaging, volume conduction, and measurement noise can cause endpoint classifiers to conflate genuine temporal structure with subject-specific nuisance variation, so a representation that performs well on one clean split may not preserve the same signal properties when amplitude noise, temporal misalignment, or channel loss is introduced.

Reporting only endpoint accuracy does not reveal *which* temporal features a representation preserves or suppresses. This gap is acute for spiking encodings: fixed recurrent reservoirs and spiking networks are expressive nonlinear temporal expansions [1], [4], but in EEG/ERP work they are most often evaluated as end-to-end classifiers [9], [15] rather than characterized as temporal operators whose discrete spike-count observables remain traceable to post-stimulus time windows.

The perturbation behavior of affective-ERP reservoir encodings—their response to amplitude noise, temporal jitter, and channel dropout—is rarely reported, even though preprocessing and acquisition choices materially affect EEG representations [16]–[18].

This paper studies a fixed spiking reservoir state-space encoding for affective ERP signal analysis and audits it as a temporal encoding operator (Fig. 1). Each ERP observation is mapped through a fixed leaky integrate-and-fire (LIF) reservoir, summarized by six post-onset spike-count bins (BSC_6), and compressed for a linear readout. The paper isolates this reservoir temporal-encoding component; graph topology, structure–function coupling, and closed-loop analyses belong to other parts of a broader doctoral framework and are outside this submission. The contributions are:

- 1) A fixed LIF/ BSC_6 temporal encoding operator for affective EEG/ERP observations, defined as a composition of a nonlinear reservoir map, spike-count binning, and an unsupervised projection (Sec. III, Eq. (4)).
- 2) Evaluation of the reservoir embedding against a classical EEG/ERP baseline under subject-grouped validation, using balanced accuracy, macro-F1, and macro one-vs-rest AUC with per-fold confidence intervals and a permutation null (Sec. V-A, Table II).
- 3) Perturbation-response characterization under amplitude noise, temporal jitter, and channel dropout, separating representation-level corruption from raw-signal recomputation (Sec. V-B, Table IV, Fig. 3).
- 4) Controls that bound common confounds—fold-local PCA, a dimensionality-matched random projection, a label-permutation null, and a single-bin spike-count ablation—and identify the fixed reservoir embedding, rather than temporal bin granularity, as the operative factor (Sec. V-A, Table III).

Clinical labels and affective categories define the external task structure; the reservoir-based temporal representation is the object of study.

II. RELATED WORK

ERP and EEG analysis have traditionally relied on time-window amplitudes and latencies, time-domain descriptors such as Hjorth parameters [10], spectral and wavelet summaries [11], and linear statistical models [13]. These features

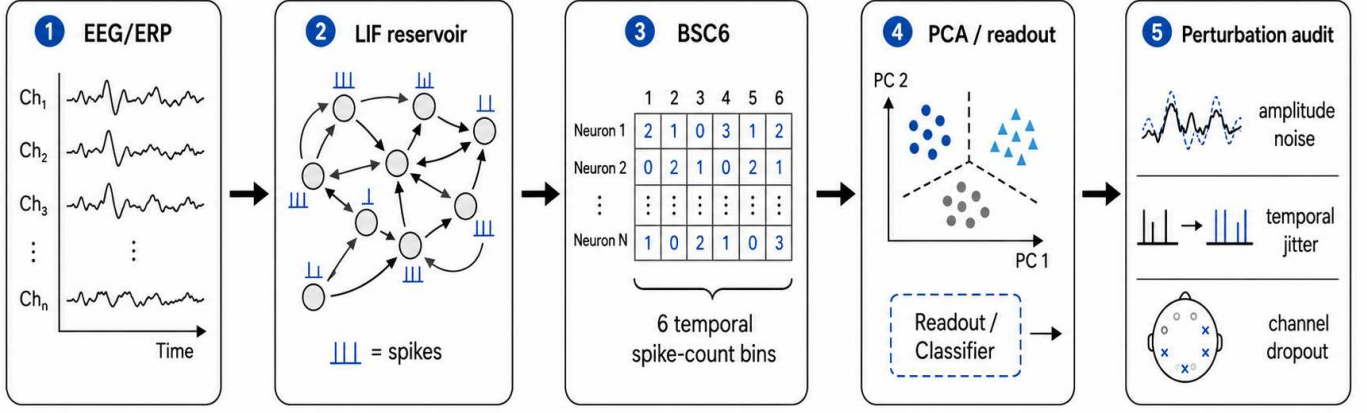


Fig. 1. Reservoir encoding and perturbation-audit pipeline. Trial-averaged affective EEG/ERP observations are mapped through a fixed LIF reservoir, summarized by six temporal spike-count bins (BSC₆), compressed for linear readout, and evaluated under amplitude noise, temporal jitter, and channel-dropout perturbations.

are interpretable and correspond to known components such as the P300 and late positive potential, and source-level analyses show that evoked responses carry structured temporal dynamics [12]. Fixed handcrafted windows may, however, underrepresent nonlinear temporal interactions and can be sensitive to subject-specific variability.

Reservoir computing offers an alternative in which a high-dimensional recurrent dynamical system transforms an input sequence into a separable state trajectory [1]–[4]. In liquid state machines, recurrent spiking dynamics induce a nonlinear temporal basis on which a simple readout is trained; related spiking models encode information in spike timing and counts [5], [6]. This separation of fixed dynamics from a trained readout is attractive for biomedical signal analysis because the reservoir can be studied as a measurement operator rather than as a fully optimized black-box classifier.

Spiking and deep networks have been applied to EEG and ERP signals [9], [14], [15], but most studies emphasize end-point accuracy, while preprocessing and acquisition choices that strongly affect EEG representations are often under-examined [18]. For perturbation-sensitive physiological data, accuracy alone is insufficient: a representation should also be assessed through subject-level generalization, controlled corruption, and representation-geometry analysis [19]. Prior work in the ARSPI-Net line developed neuromorphic reservoir feature extraction for affective EEG [7], [8]; the present paper isolates and audits the spiking temporal-encoding component as a measurement operator.

III. METHODS

A. ERP Observation Model

Let $X_s^{(c)} \in \mathbb{R}^{C \times T}$ denote the trial-averaged ERP observation for subject s and affective condition c , with C electrodes (channels) and T temporal samples; observations are stored as $T \times C$ arrays and transposed before encoding. We treat $X_s^{(c)}$ as a noisy observation of an unobserved neural state trajectory:

$$\xi_{t+1} = f_\theta(\xi_t, u_t) + \eta_t, \quad x_t = H\xi_t + \epsilon_t, \quad (1)$$

where ξ_t is the latent neural state, H is a measurement operator induced by scalp observation, and ϵ_t captures measurement and preprocessing noise. The perturbations below act directly on this observation model (Sec. V-B).

B. Spiking Reservoir Encoding

For each electrode trace, the signal is passed through a fixed LIF reservoir of 256 neurons with recurrent weights W scaled to spectral radius $\rho = 0.9$ (near the edge of stability), input weights W_{in} , leak parameter $\beta = 0.05$, and firing threshold ϑ . A compact discrete-time representation is

$$v_{t+1} = \beta v_t + W z_t + W_{\text{in}} x_t - \vartheta r_t, \quad (2)$$

$$z_{t+1} = \mathbf{1}[v_{t+1} \geq \vartheta], \quad (3)$$

where v_t is the membrane state, z_t is the binary spike vector, and r_t denotes reset after threshold crossing. The reservoir is fixed during feature extraction; only the downstream readout is trained.

Post-onset activity is summarized by six equal temporal bins over the window $t \in [10, 70]$. For reservoir unit j and bin k , the binned spike-count code is $b_{j,k} = \sum_{t \in \mathcal{B}_k} z_j(t)$, $k = 1, \dots, 6$. Per-electrode spike-bin features are compressed to 64 principal components and concatenated across the 34 channels into a trial-level reservoir representation $E_s^{(c)} \in \mathbb{R}^{2176}$. Writing $s_t = z_t \in \{0, 1\}^N$ for the reservoir spike state, the encoding is a fixed composition of a nonlinear temporal map, spike-count binning, and the unsupervised projection:

$$E = \phi_{\text{PCA}}([b_1, \dots, b_6]) = \Phi(X), \quad (4)$$

so that $E = \Phi(X)$ is a fixed, label-free observable of the input. The principal-component projection is estimated once, unsupervised and without affective labels, over the spike-bin vectors pooled across all observations and electrodes; because the basis is fitted on every subject—including those later held out—it is transductive with respect to subject inclusion, and we report it as a fixed representation audit rather than leakage-free preprocessing (bounded by the fold-local control in Sec. V-A).

As a temporal-structure control, we also form a single-bin code (BSC₁, the total post-onset spike count per unit) processed through the identical PCA pipeline.

Fig. 2 shows the reservoir-derived computational objects for the three affective conditions: the LIF spike raster, the membrane-potential response, and the BSC₆ embedding projected to two principal components.

C. Baselines and Readout

The primary baseline (A0) consists of spectral band-power features (5 bands $\times$ 34 channels = 170 dimensions) evaluated with the same subject-grouped protocol. To separate representational robustness from raw dimensionality, we add a dimensionality-matched control: the 170-dimensional baseline randomly projected to 2176 dimensions (Gaussian random projection). A balanced L2-regularized logistic readout is used throughout to test representational separability without a high-capacity classifier.

D. Perturbation Diagnostics

Two perturbation regimes are separated. Representation-level perturbations corrupt the extracted feature vector; raw-signal recomputation applies perturbations before feature extraction and recomputes the reservoir representation, propagating corruption through reservoir dynamics. Formally, a perturbation $\mathcal{P}_\eta$ acts either on the representation, $E \mapsto \mathcal{P}_\eta(E)$, or on the observation model of Eq. (1): amplitude noise augments the measurement noise ϵ_t , channel dropout zeroes rows of the measurement operator H , and temporal jitter shifts the sampling index of x_t . We apply additive amplitude noise (signal-to-noise ratios), temporal jitter of the alignment window, and channel dropout at increasing electrode-removal rates. Performance is balanced accuracy (BA) and macro-F1.

IV. EXPERIMENTAL PROTOCOL

A. Dataset and Task

The experiments use a trial-averaged affective ERP dataset with 211 subjects after exclusion of one anomalous subject record. Each subject contributes three affective conditions (negative, neutral, pleasant), yielding 633 subject-condition observations. The ERP traces contain 34 scalp channels down-sampled to 256 Hz, with 256 post-stimulus samples per epoch, baseline-corrected relative to onset. Subject-level data are maintained in a restricted research environment; only aggregate, de-identified results are reported. Table I summarizes the protocol.

B. Validation

All results are computed under a single protocol: Stratified-GroupKFold (5 folds, seeds 42–46), train-only standardization, and a balanced L2 logistic readout; observations from the same subject never span train and test. We report means with 95% confidence intervals (CIs) over the 25 folds, and macro one-vs-rest AUC from pooled out-of-fold probabilities. Chance is calibrated by a label-permutation null (100 permutations).

TABLE I
DATASET AND EVALUATION PROTOCOL SUMMARY.

Item	Value
Subjects (after exclusion)	211
Observations	633 (subject $\times$ condition)
Conditions	3 (neg., neutral, pleasant)
Channels / rate / samples	34 / 256 Hz / 256
Baseline (A0) dim.	170 (5 $\times$ 34)
Reservoir embedding (E) dim.	2176 (64 $\times$ 34)
Validation	subject-grouped 5-fold CV

TABLE II
CLEAN SUBJECT-LEVEL PERFORMANCE (MEAN $\pm$ 95% CI OVER 25 FOLDS). PERMUTATION-NULL BA = 0.338 ± 0.022 .

Cfg	Features	BA	F1	AUC
A0	Band-power (170)	0.485 ± 0.015	0.483	0.665
A1	Reservoir BSC ₆ (2176)	0.463 ± 0.013	0.460	0.644
–	Reservoir BSC ₁ (2176)	0.467 ± 0.011	0.465	0.646

V. RESULTS

A. Clean Classification and Controls

Table II reports clean three-class performance. The reservoir embedding (A1) does not exceed the classical baseline (A0); their CIs overlap. A label-permutation null gives BA 0.338 ± 0.022 , so every configuration encodes genuine signal (A0 and A1 exceed the null by more than five standard deviations) but the clean separability is modest.

Temporal-binning ablation. The single-bin total-count code (BSC₁) matches the six-bin code (BSC₆) on clean classification (0.467 vs. 0.463; Table II). Temporal bin granularity therefore does not improve clean separability over total spike count, and the operative factor is the fixed reservoir embedding rather than the binning.

Transduction and component controls. A fold-local PCA refit (per-fold training subjects) leaves performance unchanged (Table III); varying the component count over {16, 32, 64, 128} keeps BA within 0.461–0.491, so neither the transductive basis nor the 64-component choice inflates results.

B. Representation-Level Perturbation Response

Under feature-space corruption (Table IV), the band-power baseline degrades sharply—from BA 0.485 to 0.395 at 5 dB amplitude noise and to 0.408 at 30% channel dropout—while the reservoir embedding degrades little (0.463 $\rightarrow$ 0.449 and 0.456). Two controls show this gap is not an artifact of representation size. The dimensionality-matched random projection of A0 (2176-D) degrades under 5 dB noise to 0.399 ± 0.013 , tracking A0 (0.395) rather than E (0.449); and channel dropout is channel-matched (both use 34 channels). The single-bin BSC₁ embedding is equally robust (0.452 at 5 dB, 0.454 at 30% dropout), consistent with the binning playing no role.

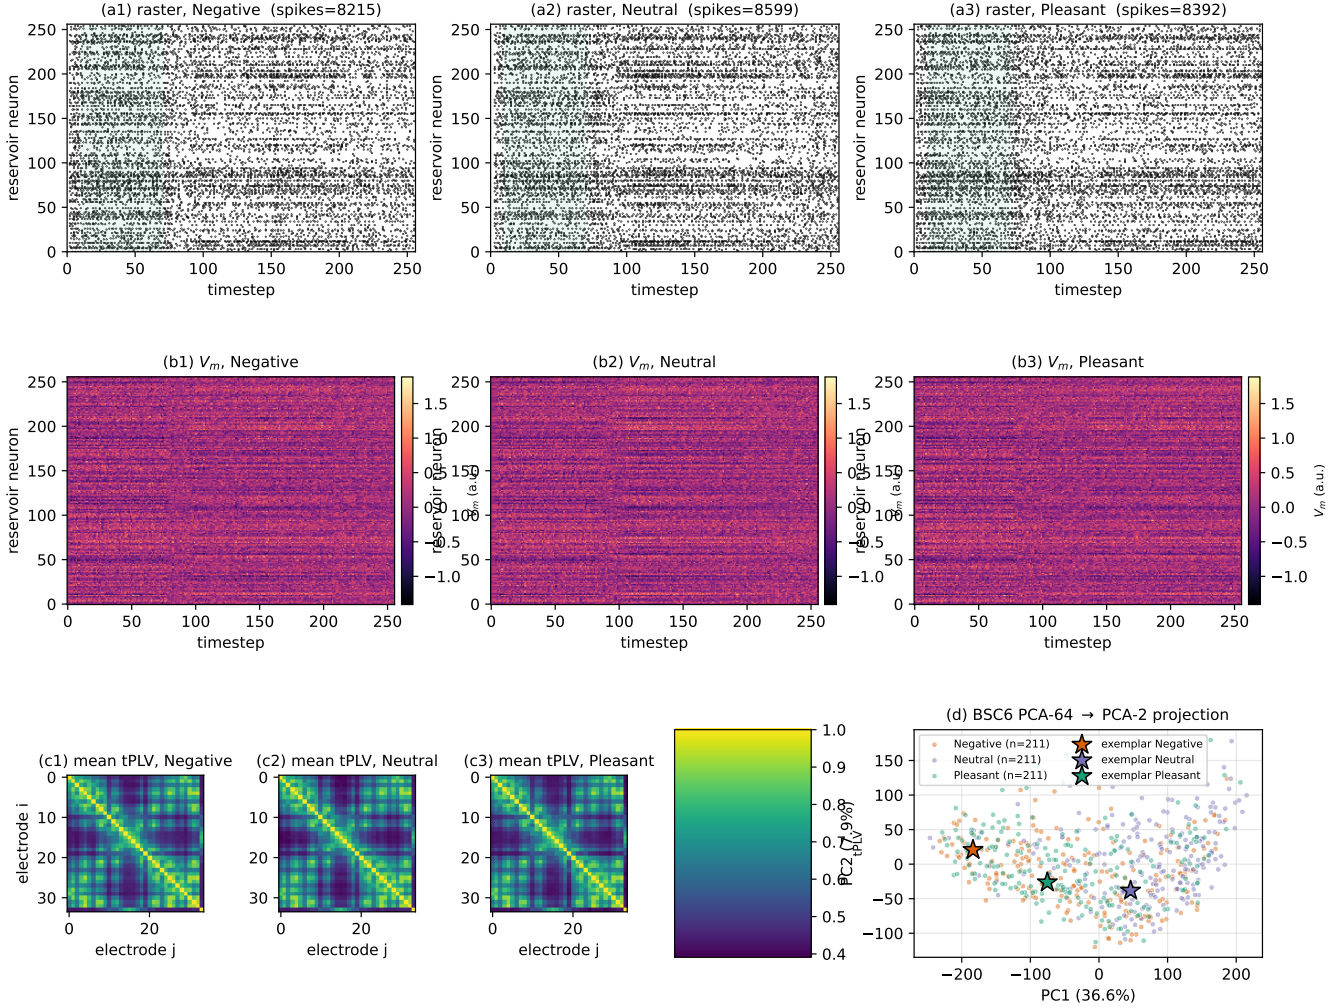


Fig. 2. Reservoir-derived computational objects for affective ERP observations. (a) LIF spike raster. (b) Membrane response. (c) Phase-locking adjacency (contextual; not used in this study). (d) BSC₆ embedding projected to the first two principal components.

TABLE III
FOLD-LOCAL VS. GLOBAL PCA FOR THE RESERVOIR EMBEDDING E (A1). OvR-AUC IS MACRO ONE-VS-REST FROM POOLED OUT-OF-FOLD PROBABILITIES.

PCA basis	BA	Macro-F1	OvR-AUC
Global pooled (transductive)	0.463	0.460	0.644
Fold-local (per-fold train)	0.465	0.462	0.649

TABLE IV
REPRESENTATION-LEVEL PERTURBATION DIAGNOSTICS (BA, MEAN $\pm$ 95% CI). $A0^\dagger$ IS THE DIMENSIONALITY-MATCHED RANDOM PROJECTION OF $A0$ TO 2176-D.

Perturbation	$A0$	$A0^\dagger$ (2176)	E (A1)
Clean	0.485 ± 0.015	0.502 ± 0.019	0.463 ± 0.013
Amplitude, 5 dB	0.395 ± 0.016	0.399 ± 0.013	0.449 ± 0.012
Dropout, 30%	0.408 ± 0.022	–	0.456 ± 0.013

C. Raw-Signal Recomputed Perturbations

A stricter test corrupts the signal before feature extraction and recomputes the embedding under the same protocol (Table V). Clean recomputation reproduces the embedding result (0.465). Temporal jitter is the most damaging perturbation (0.465 $\rightarrow$ 0.422), with amplitude noise and channel dropout

intermediate (0.449, 0.431); all remain above the permutation null. The embedding is thus reasonably stable even when corruption enters before extraction, but temporal alignment is the dominant sensitivity, consistent with the dependence of the reservoir state trajectory on the input timing.

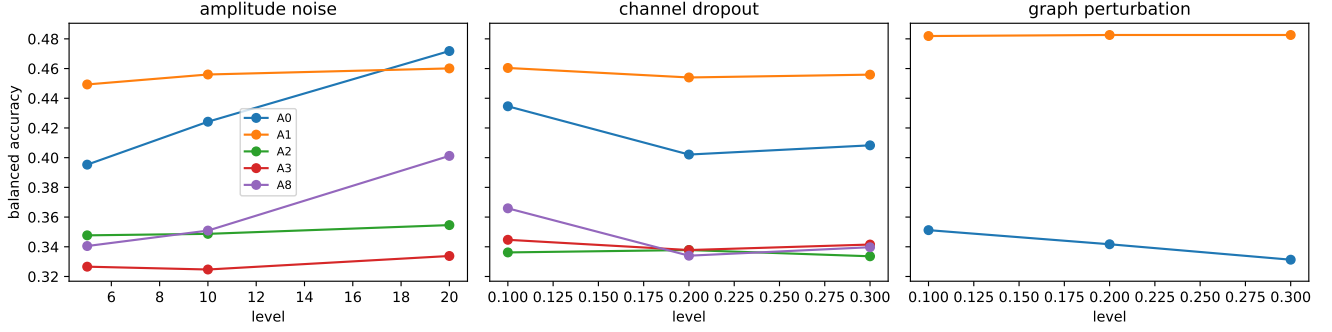


Fig. 3. Perturbation response under controlled corruption. Balanced accuracy as a function of perturbation level for the reservoir embedding E (A1) and the classical band-power/ERP baseline (A0) under amplitude noise and channel dropout.

TABLE V
RAW-SIGNAL RECOMPUTATION DIAGNOSTICS (MEAN $\pm$ 95% CI OVER 25 FOLDS).

Condition	BA	Macro-F1
Clean recomputation	0.465 ± 0.013	0.462
Temporal jitter, ± 50 ms	0.422 ± 0.016	0.379
Amplitude noise, 5 dB	0.449 ± 0.018	0.445
Channel dropout, 30%	0.431 ± 0.021	0.402

VI. DISCUSSION

The evidence supports a bounded reading. The fixed reservoir embedding encodes genuine affective-condition signal (well above the permutation null) but does not outperform a classical band-power baseline on clean static classification; the two are statistically indistinguishable. Its advantage is a distinct perturbation-response profile: under representation-level amplitude noise and channel dropout it degrades far less than the baseline, and two controls establish that this is not a measurement artifact—a dimensionality-matched random projection of the baseline degrades like the baseline, and the dropout comparison is channel-matched. Under raw-signal recomputation the embedding remains reasonably robust, with temporal jitter the dominant vulnerability, reflecting the reservoir’s dependence on input timing.

A key negative result delimits the contribution: a single-bin total spike count (BSC_1) matches the six-bin code on clean classification and under every perturbation. Temporal bin granularity is therefore not the operative factor; the robustness is a property of the fixed reservoir state-space embedding and its unsupervised compression, not of the temporal binning. The audit framing—characterizing what a fixed encoding preserves under controlled corruption—is what the data support, rather than a claim that temporal structure per se confers an advantage.

Several scope boundaries remain. The dataset is a single affective ERP cohort, and external validation is needed before generalization. The only comparator is a classical baseline; a modern deep baseline (e.g., EEGNet) under the same per-

turbation protocol is a natural next step. The study evaluates software-level representations, not neuromorphic hardware energy or latency, which would require measurement on dedicated platforms [20], [21]. The perturbation diagnostics are controlled tests, not substitutes for full acquisition artifacts, and graph topology and structure–function coupling are not evaluated here.

VII. CONCLUSION

A fixed spiking-reservoir state-space embedding of affective ERPs encodes genuine but modest condition signal and does not beat a classical band-power baseline on clean classification. Its distinguishing property is perturbation robustness: under representation-level amplitude noise and channel dropout it degrades far less than the baseline, and dimensionality-matched and channel-matched controls show this is not an artifact of representation size. A single-bin spike-count ablation shows the robustness comes from the reservoir embedding rather than temporal bin granularity, and the embedding’s chief vulnerability is temporal misalignment at acquisition. These results characterize the operating regime of a fixed reservoir encoding for affective ERP analysis. Future work should add modern deep baselines under the same perturbation protocol, test multi-cohort generalization, and examine whether alternative spiking codes recover a temporal-structure advantage that simple binning does not.

Data Availability and Scope. The EEG/ERP data used in this study are access-controlled research data and are not redistributed with this submission. Analyses are reported only as aggregate, de-identified results. Clinical labels, where present in the source cohort, are used only to define biomedical signal-analysis context and are not interpreted as diagnostic decisions.

REFERENCES

- [1] W. Maass, T. Natschlger, and H. Markram, “Real-time computing without stable states: A new framework for neural computation based on perturbations,” *Neural Computation*, vol. 14, no. 11, pp. 2531–2560, 2002.
- [2] H. Jaeger, “The echo state approach to analysing and training recurrent neural networks,” German National Research Center for Information Technology, GMD Report 148, 2001.

- [3] H. Jaeger and H. Haas, "Harnessing nonlinearity: Predicting chaotic systems and saving energy in wireless communication," *Science*, vol. 304, no. 5667, pp. 78–80, 2004.
- [4] M. Lukoševičius and H. Jaeger, "Reservoir computing approaches to recurrent neural network training," *Computer Science Review*, vol. 3, no. 3, pp. 127–149, 2009.
- [5] P. U. Diehl and M. Cook, "Unsupervised learning of digit recognition using spike-timing-dependent plasticity," *Frontiers in Computational Neuroscience*, vol. 9, p. 99, 2015.
- [6] K. Roy, A. Jaiswal, and P. Panda, "Towards spike-based machine intelligence with neuromorphic computing," *Nature*, vol. 575, pp. 607–617, 2019.
- [7] A. Lane, W. Tang, and B. Nelson, "Towards ARSPI-Net: Development of an efficient hybrid deep learning framework," in *Proc. IEEE Long Island Systems, Applications and Technology Conf. (LISAT)*, Old Westbury, NY, USA, 2023, pp. 1–8.
- [8] A. Lane, W. Tang, and B. Nelson, "Towards ARSPI-Net: Advancing EEG feature extraction with neuromorphic algorithms," in *Proc. IEEE Long Island Systems, Applications and Technology Conf. (LISAT)*, Holtsville, NY, USA, 2024, pp. 1–8.
- [9] P. Gong, P. Wang, Y. Zhou, and D. Zhang, "A spiking neural network with adaptive graph convolution and LSTM for EEG-based brain-computer interfaces," *IEEE Trans. Neural Syst. Rehabil. Eng.*, vol. 31, pp. 1440–1450, 2023.
- [10] B. Hjorth, "EEG analysis based on time domain properties," *Electroencephalography and Clinical Neurophysiology*, vol. 29, no. 3, pp. 306–310, 1970.
- [11] A. Subasi, "EEG signal classification using wavelet feature extraction and a mixture of expert model," *Expert Systems with Applications*, vol. 32, no. 4, pp. 1084–1093, 2007.
- [12] S. Makeig, M. Westerfield, T.-P. Jung, S. Enghoff, J. Townsend, E. Courchesne, and T. J. Sejnowski, "Dynamic brain sources of visual evoked responses," *Science*, vol. 295, no. 5555, pp. 690–694, 2002.
- [13] B. Blankertz, S. Lemm, M. Treder, S. Haufe, and K.-R. Müller, "Single-trial analysis and classification of ERP components—a tutorial," *NeuroImage*, vol. 56, no. 2, pp. 814–825, 2011.
- [14] V. J. Lawhern, A. J. Solon, N. R. Waytowich, S. M. Gordon, C. P. Hung, and B. J. Lance, "EEGNet: A compact convolutional neural network for EEG-based brain-computer interfaces," *Journal of Neural Engineering*, vol. 15, no. 5, 056013, 2018.
- [15] A. Craik, Y. He, and J. L. Contreras-Vidal, "Deep learning for electroencephalogram (EEG) classification tasks: A review," *Journal of Neural Engineering*, vol. 16, no. 3, 031001, 2019.
- [16] H.-S. Chiang, M.-Y. Chen, and L.-S. Liao, "Cognitive depression detection cyber-medical system based on EEG analysis and deep learning approaches," *IEEE J. Biomed. Health Inform.*, vol. 27, no. 2, pp. 608–616, 2023.
- [17] Y. Guo, K. Yang, and Y. Wu, "A multi-modality attention network for driver fatigue detection based on frontal EEG, EDA and PPG signals," *IEEE J. Biomed. Health Inform.*, vol. 29, no. 6, pp. 4009–4022, 2025.
- [18] F. Del Pup, A. Zanola, L. F. Tshimanga, A. Bertoldo, and M. Atzori, "The more, the better? Evaluating the role of EEG preprocessing for deep learning applications," *IEEE Trans. Neural Syst. Rehabil. Eng.*, vol. 33, pp. 1061–1070, 2025.
- [19] S. Kornblith, M. Norouzi, H. Lee, and G. Hinton, "Similarity of neural network representations revisited," in *Proc. Int. Conf. Machine Learning*, 2019, pp. 3519–3529.
- [20] M. Davies *et al.*, "Loihi: A neuromorphic manycore processor with on-chip learning," *IEEE Micro*, vol. 38, no. 1, pp. 82–99, 2018.
- [21] S. B. Furber, F. Galluppi, S. Temple, and L. A. Plana, "The SpiNNaker project," *Proceedings of the IEEE*, vol. 102, no. 5, pp. 652–665, 2014.

Education

Stony Brook University	Anticipated 2026
Ph.D., Electrical and Computer Engineering. Research focus: neuromorphic signal processing and EEG/ERP representation analysis. Advisor: Wendy Tang; committee/collaborator: Brady D. Nelson.	
New York Institute of Technology	2010
M.S., Electrical and Computer Engineering.	
Hofstra University	2008
B.S., Biomedical and Electrical Engineering.	

Research Experience

Doctoral Researcher, Stony Brook University	2019–Present
Developed ARSPI-Net, a staged neuromorphic signal-processing framework for EEG/ERP analysis. Doctoral work models affective neural data as noisy, partially observed outputs of biological dynamical systems.	
Bioinformatics Analyst, Feinstein Institute for Medical Research	2011–2014
Developed laboratory-automation robotics software and research data-management systems.	
Research Analyst, Rockefeller University	2008–2011
Developed automation and robotics programming for high-throughput screening workflows.	

Teaching and Academic Appointments

Teaching Professor, St. Joseph’s University	2019–Present
Department of Mathematics and Computer Science. Teaching areas include artificial intelligence, data structures and algorithms, operating systems, computer networking, information security, computer forensics, programming, discrete mathematics, and computer architecture.	
Adjunct Instructor, St. Joseph’s University	2014–2019
Department of Mathematics and Computer Science.	
Adjunct Instructor, Hofstra University	2017–Present
Computer science and engineering instruction.	
Adjunct Assistant Professor, Farmingdale State College	2014–Present
Computer science and engineering instruction.	
Instructor, Stony Brook University	2022–2025
Department of Electrical Engineering.	

Selected Publications

- A. Lane, W. Tang, and B. Nelson, “Towards ARSPI-Net: Advancing EEG Feature Extraction with Neuromorphic Algorithms,” *2024 IEEE Long Island Systems, Applications and Technology Conference (LISAT)*, pp. 1–8, 2024. doi:10.1109/LISAT63094.2024.10808138.
- A. Lane, W. Tang, and B. Nelson, “Towards ARSPI-Net: Development of an Efficient Hybrid Deep Learning Framework,” *2023 IEEE Long Island Systems, Applications and Technology Conference (LISAT)*, pp. 1–8, 2023. doi:10.1109/LISAT58403.2023.10179592.

Mentoring and Service

- Faculty advisor, Upsilon Pi Epsilon Computer Science Honor Society, St. Joseph’s University.
- Undergraduate research mentor for projects in neural machine translation, visual speech recognition, affective computing, and AI bias.

Technical Skills

Neuromorphic computing; spiking neural networks; liquid-state machines; reservoir computing; graph neural networks; EEG/ERP signal processing; perturbation analysis; dimensionality reduction; Python; machine learning; LaTeX.